


ENTRANCE SOLUTIONS AND ARCHITECTURE

ENTRANCE SOLUTIONS
AND ARCHITECTURE



www.record.global ■ info@record.global

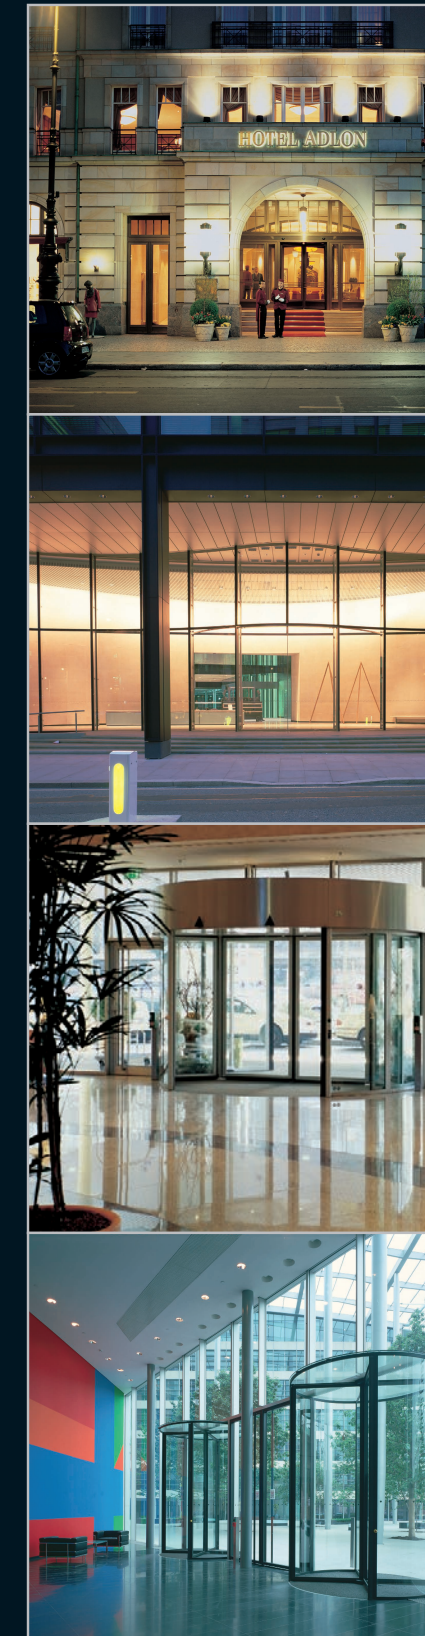



CONTENTS

record BLASI	4
ABOUT US	6
ENTRANCE SOLUTIONS – SUMMARY	



REVOLVING	7
ENTRANCE SOLUTIONS – REVOLVING	8
REVOLVING – OFFERING UNLIMITED POTENTIAL	10
FINANCIAL INSTITUTIONS & INSURANCES RETAIL SECTOR	44
AIRPORTS & RAILWAY STATIONS	48
HOTELS & RESTAURANTS	58
MUSEUMS	64
PROJECTS	70
PUBLIC SERVICES & ORGANISATIONS	

CURVED SLIDER	79
CURVED SLIDER – SLIDING DOORS FOR ANY CONCEIVABLE RADIUS	82
INDUSTRY & ADMINISTRATION	90
FINANCIAL INSTITUTIONS & INSURANCES	98
HOTELS & RESTAURANTS	102
RETAIL SECTOR	

SLIDER	107
SLIDER – FLEXIBLE SLIDING DOOR SOLUTIONS	108
HOTELS & RESTAURANTS	110
PUBLIC SERVICES & ORGANISATIONS	118
SPECIAL SOLUTIONS	

record STANDARD PORTFOLIO	129
record – YOUR GLOBAL PARTNER FOR ENTRANCE SOLUTIONS	130
record – AUTOMATIC DOOR SYSTEMS	132
SLIDING DOORS	144
SWING DOORS	148
FOLDING DOORS	150
SEALED DOOR SYSTEMS	152
CURVED SLIDING DOORS	154
SECURITY DOORS	160
GATES	164
record – SERVICE & MAINTENANCE	

WE LEAD YOU FROM DOOR TO DOOR

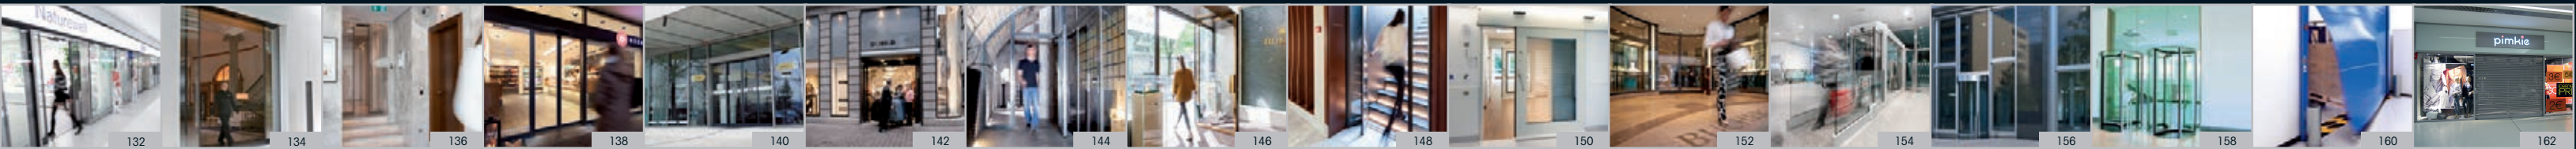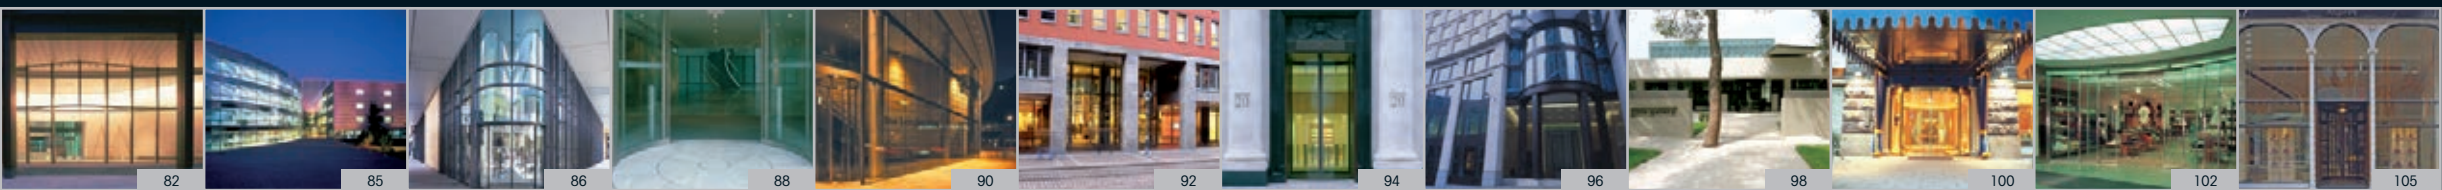



BLASI – THE COMPANY

AN INDIVIDUALLY DESIGNED,
AESTHETICALLY APPEALING,
FUNCTIONALLY IMPRESSIVE AND
TECHNICALLY PERFECTED ENTRANCE AREA,
MADE FROM HIGH GRADE MATERIALS
ADDS A STRONG EMPHASIS.

IT ALSO EXPRESSES APPRECIATION OF
THOSE ENTERING AND EXITING DAILY.

Through the acquisition of BLASI GmbH in 2007 the agta record group combined the best of both worlds. A first class worldwide sales, installation and service network has been merged with BLASI's creative, innovative and architectural expertise. The new entity continues relatively independently under the name of record BLASI.

The core competencies remain clearly distributed throughout all technical exchanges: record caters to high volume markets with technologically advanced products, whereas record BLASI uncompromisingly implements customer requests to the very limits of technical feasibility.

INDIVIDUALITY

Architecture has many facets and the business card of a building is its entrance. A sophisticated entrée plays a representative role and should be individualised. However complex this task may be, we consider it a challenge to achieve creative success in its own right. We approach the client's desires, the architect's requirements and the special circumstances surrounding each situation flexibly. Shape is always a result of function since function consists of far more than mere mechanical processes. Meeting emotional needs is also a function of good design.

INNOVATION

Each technical innovation serves the purpose of making the entrance area as convenient and as safe as possible or to meet design and functional requirements which could not be met previously. A good deal of courage is necessary, to question ostensibly, irrevocable principles and the deeper insight that each innovation must deliver substantial benefits and tangible advantages. In that sense record BLASI has developed a number of innovative solutions up to readiness for the start of serial production. We will continue to look for ways to expand the boundaries of feasibility on an ongoing basis. For this purpose we have created an innovative culture which allows and encourages fresh impulses. The reason for this dedication? Innovation is a passion.

QUALITY

Quality out of conviction is the driving force behind our unremitting passion to question existing standards constantly in order to improve them, encompassing development, production and a comprehensive customer service. The know-how gathered over a period of three decades in conjunction with high expectations in terms of precision and perfection constitutes a firm foundation of sustainability and reliability which can be depended upon in the daily application of our products. Quality also means that we develop, test and manufacture our own components, where others settle for standard parts.

PARTNERSHIP

Our passion for bespoke entrance solutions with a high degree of panache can be found wherever ambitious architecture is being realised or historic buildings are carefully refurbished. In Europe, Asia and America. In company headquarters, parliaments and embassies, in airport buildings and museums, in stores up and including flagship stores, in hotels and restaurants. In trusting co-operation with architects, curtain walling companies, developers and clients. To us their success based on our contribution is the immovable benchmark of our performance.

ATTITUDE, LOCATION AND OUTLOOK

record BLASI's automatic door systems are developed and manufactured solely on site in Germany using cutting edge technology and considerable technical expertise. In the age of globalization this certainly cannot be taken for granted. But only perfect control of all procedures in development and fabrication leads to the results that will satisfy the highest quality requirements. Not only does our modern manufacturing and service centre in Mahlberg on the edge of the Black Forest serve as the appropriate background; it also reflects the company's operating procedures: customer orientation, teamwork, flexible project planning, open communication, short decision making processes and speedy overview of the state of affairs. Always close to the pulse of time, we think and act transgressing borders and are always open to new things, people and cultures.

**„FIRST WE SHAPE THE BUILDINGS,
AND AFTERWARDS OUR BUILDINGS SHAPE US.”**

(SIR WINSTON CHURCHILL)

The world of automatic door systems: we like to re-invent it over and over again for our clients with individually tailored solutions at the very centre. Each stand alone bespoke solution complements the respective architectural style. The outcome of this approach is an almost infinite number of creative possibilities. It is our intention to introduce you to this variety – from door to door.



ENTRANCE SOLUTIONS

Summary

SIZE IS RELATIVE WHEREAS CALIBRE IS NOT

Even stronger yet lighter. Even more performance, technical requirements and technological subtleties, but invisible please. These repeated requirements appear to be the end of the road all too often.

One cannot achieve one aspect without losing another. This is the point where BLASI begins to push out the boundaries of feasibility a little further. The end result is a solution which meets all requirements simultaneously while being the opposite of uniformity. This is also based on the perfect balance of shape, function and materials.

Each door system may be produced in all-glass, stainless steel, brass, aluminium, timber or any RAL colour. Be it a linear, swing or prism door, curved or oval sliding door, a revolving door with 2, 3 or 4 leaves. The appeal of BLASI systems lies also in the fact that a known theme may find a new interpretation.

REVOLVING

2, 3 or 4 leaf revolving doors with diameters ranging from 1800 mm up to 6000 mm come into operation at locations with volumes of high traffic where smoothly flowing streams of visitors must be catered for.

CURVED SLIDER

Curved sliding doors are manufactured individually either in circular, curved or oval shape; all radii can be achieved. The optional concealed underfloor drive affords all-glass facades to look light and transparent.

SLIDER

This versatile automatic system is particularly attractive and is available as classic, telescopic sliding door or prismatic sliding door. The door leaves are available in safety glass, toughened or laminated or bullet-proof glass as well as timber, aluminium and many more. It may also be equipped with underfloor drive mechanism. The unit is has a modular composition and can even be purchased as a kit version.

record STANDARD PORTFOLIO

Whether in functional applications such as escape routes, fire containment or separating two climate zones; whether enhancing convenience by providing barrier-free access in nursing homes, or enabling touch-free access to operating theatres, or as a welcoming gesture in department stores; whether functioning as a security interlock in sensitive areas, permitting one-way access only, or functioning as a representative telescopic, revolving or curved sliding door: record makes all these options possible.

REVOLVING

Entrance solutions



REVOLVING


Offering unlimited potential



May we present the technically mature and extremely quiet BLASI revolving doors: Available with two, three or four door leaves, with or without integrated display cases, integrated emergency escape facility, night lock and a diameter of up to 6000 mm – anything is possible.

The multitude of options presents a challenge for architects and planners. There is a choice between the drive unit being concealed in the ceiling or underneath the finished floor, between any RAL colour, anodized hues or alternatively an all-glass design for a particularly striking visual effect.

BLASI revolving doors are equipped with a reduced speed option to facilitate access for disabled people. Similarly exemplary is the high safety standard characteristic for all our automatic door systems. All BLASI revolving door systems have been TÜV approved and certified for use in escape and emergency exit routes.



4-leaf revolving door systems



4-leaf revolving door systems with display cabinets and night lock




3-leaf revolving door systems



2-leaf revolving door systems with integrated safety sliding leaves, emergency escape route and display cabinets




REVOLVING

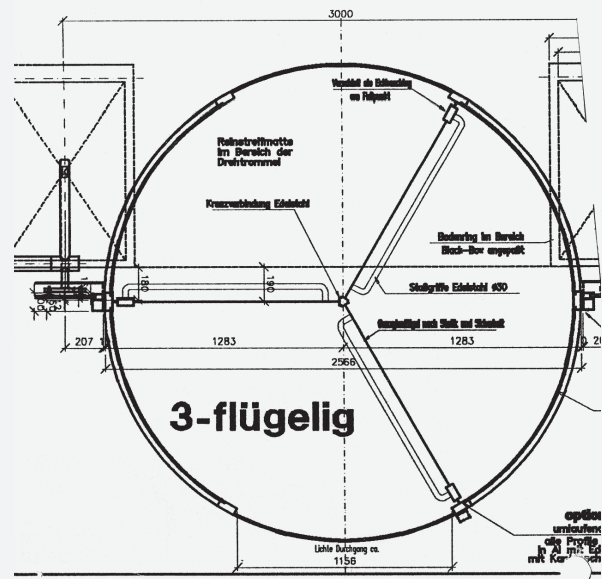

3-LEAF REVOLVING DOOR DOOR TYPE K 31

Diameter:	2600 mm
Passage height:	3000 mm
Overall height:	6500 mm

Diameter and overall height variable.

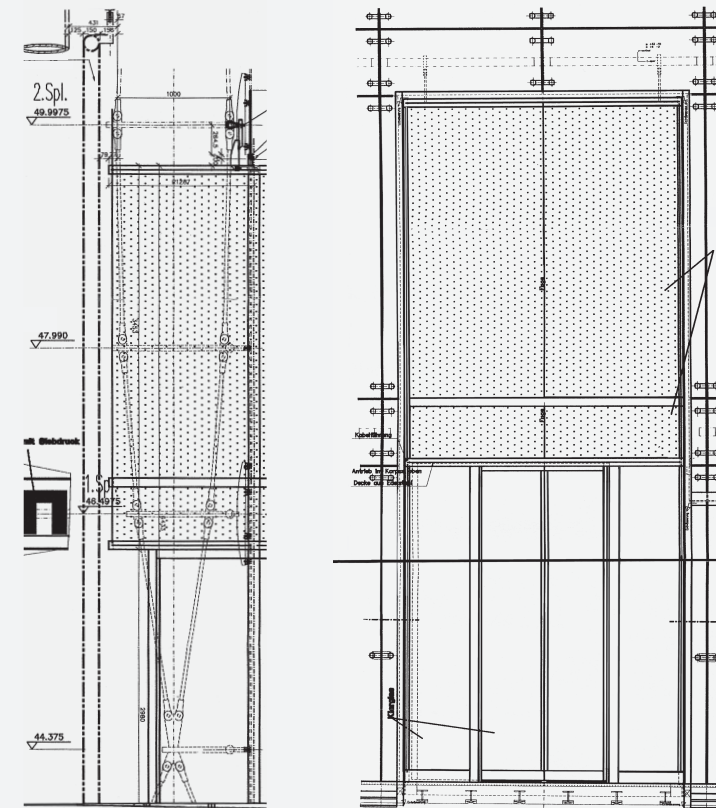


DISTINCTIVE FEATURES

Semi-automatic revolving door with all-glass drum walls. Translucent 3500 mm high canopy with integrated lighting. The system is not connected with the facade thus structurally free-standing. All visible components in satin stainless steel.




REVOLVING

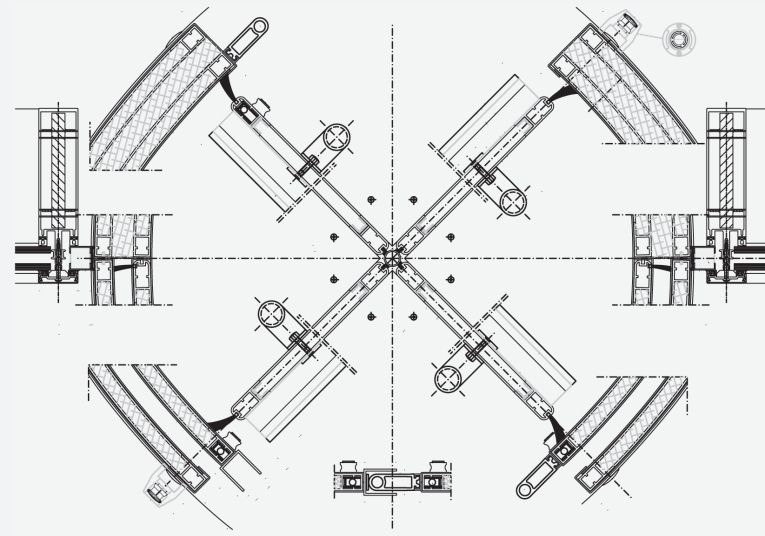

4-LEAF REVOLVING DOOR DOOR TYPE K 41


Diameter: 2400 mm
Passage height: 2700 mm
Overall height: 6070 mm

Diameter and overall height variable.

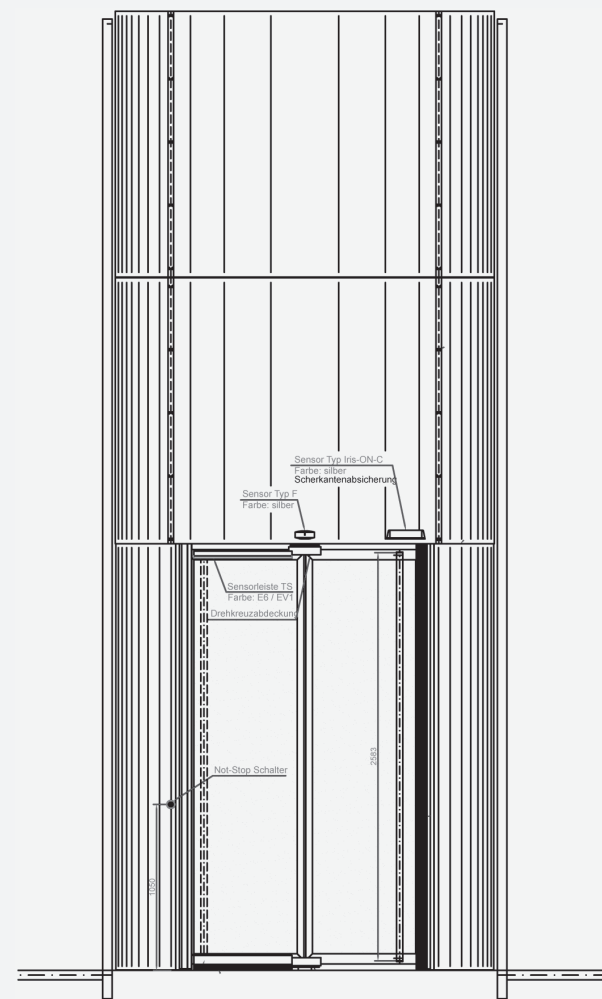


DISTINCTIVE FEATURES

Fully automatic revolving door with solid panel drum wall construction. Integrated night shutter. All visible surfaces anodised.

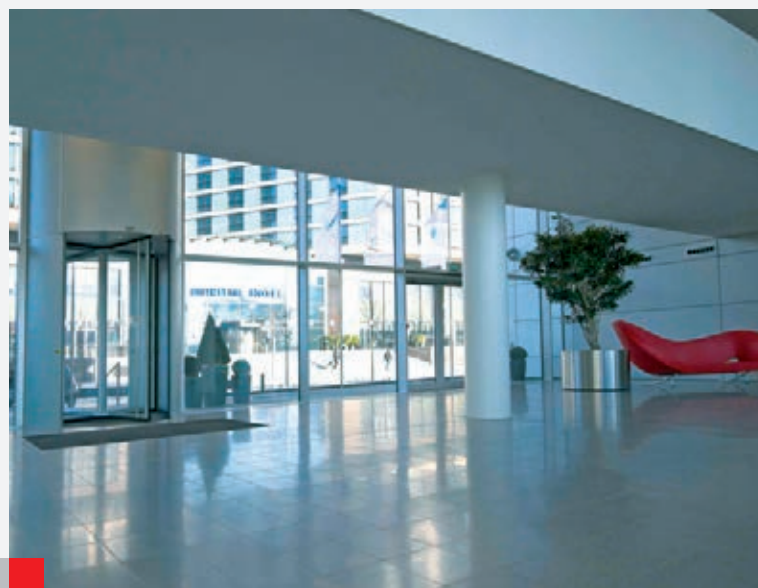



REVOLVING

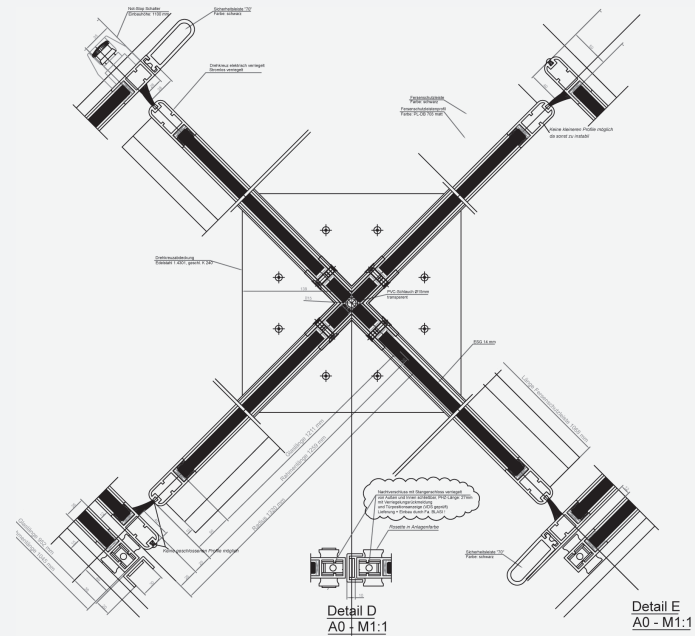

UNDERFLOOR 4-LEAF REVOLVING DOOR DOOR TYPE K 41

Diameter: 2600 mm
Passage height: 4600 mm
Installation depth: 350 mm

Diameter and overall height variable. Underfloor drive units require a minimum depth of 350 mm.

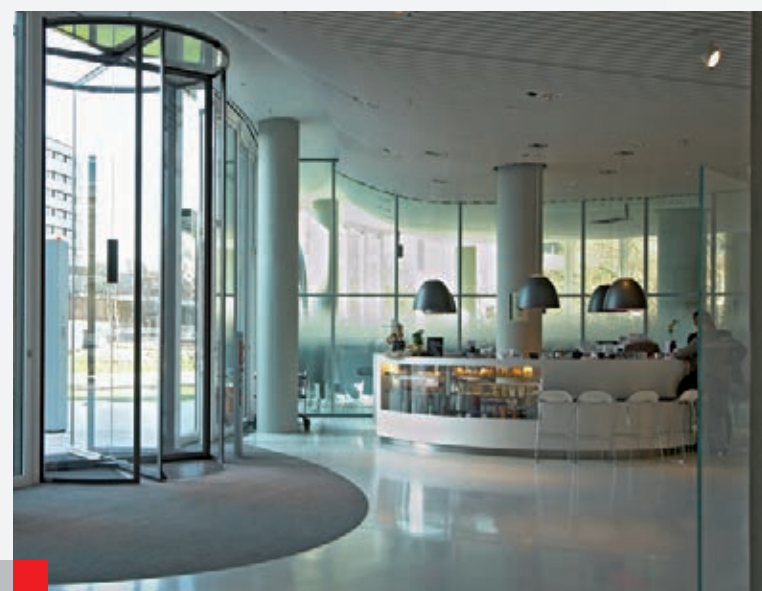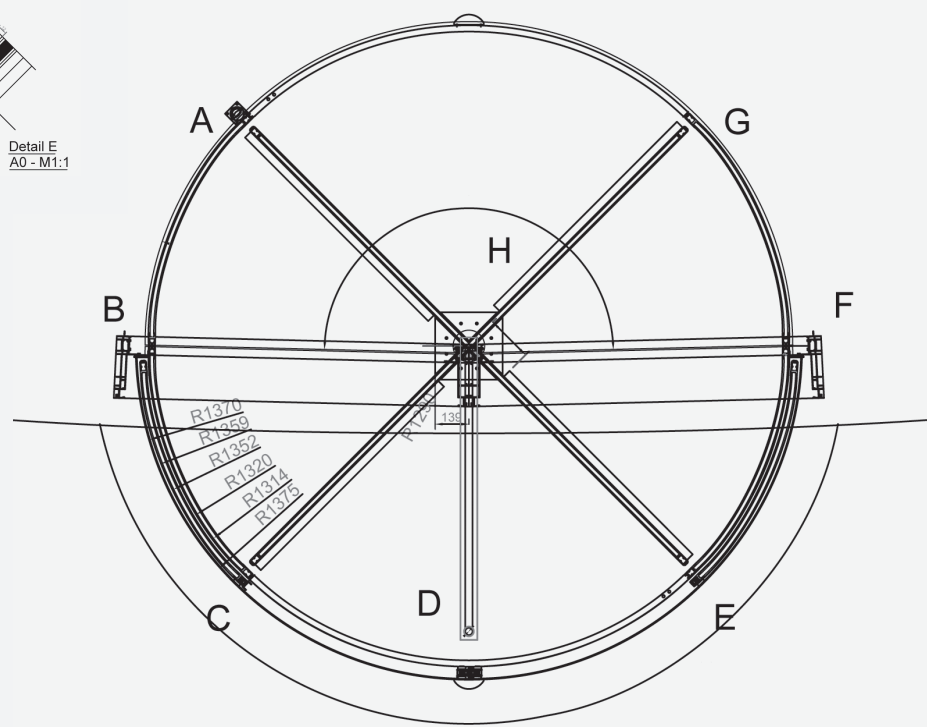


DISTINCTIVE FEATURES

Fully automatic underfloor revolving door in VITRO all glass design. Integrated underfloor night shutter. All visible surfaces in RAL powder coating.




REVOLVING

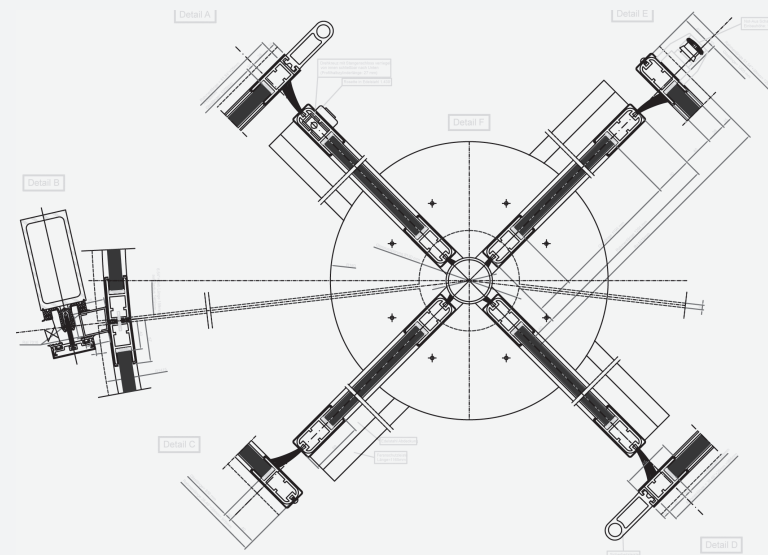

UNDERFLOOR 4-LEAF REVOLVING DOOR DOOR TYPE K 41

Diameter: 2800 mm
Passage height: 5000 mm
Installation depth: 470 mm

Diameter and overall height variable. Underfloor drive units require a minimum depth of 350 mm.


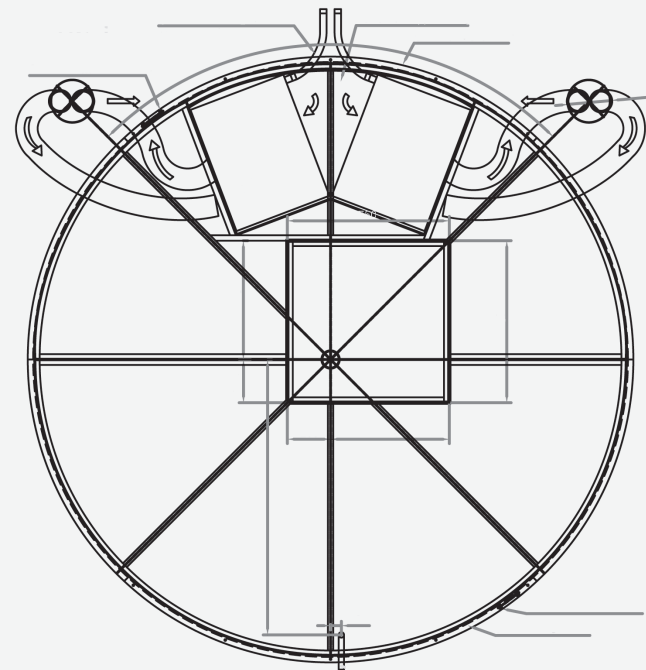


DISTINCTIVE FEATURES

Fully automatic underfloor revolving door in VITRO all glass design. Integrated floor mounted flush radar system DownTec. All visible surfaces in stainless steel satin finished.



REVOLVING

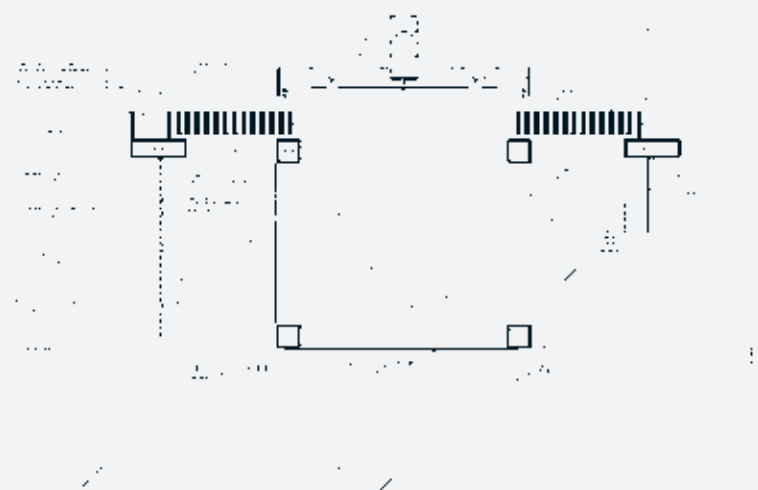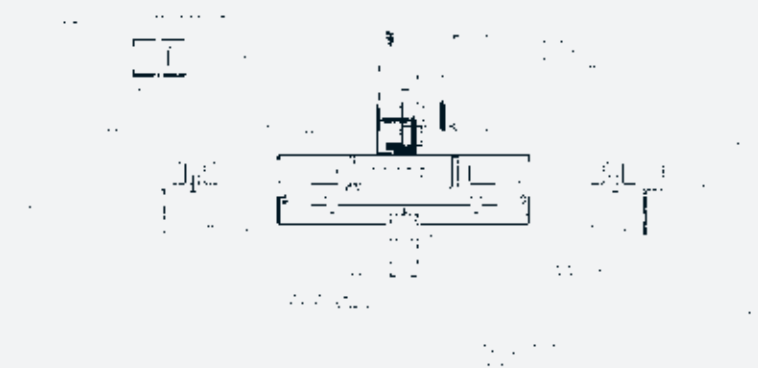

UNDERFLOOR 4-LEAF REVOLVING DOOR DOOR TYPE K 41

Diameter: 2500 mm
Passage height: 2400 mm
Installation depth: 300 mm

Diameter and overall height variable. Underfloor drive units require a minimum depth of 350 mm.



DISTINCTIVE FEATURES

Semi-automatic all-glass VITRO revolving door with concealed underfloor drive unit. Frameless turnstile centre and floor consisting of a stainless steel grille. All visible components in satin stainless steel finish.




REVOLVING

4-LEAF REVOLVING DOOR DOOR TYPE K 41

Diameter: 2400 mm
Passage height: 3700 mm
Overall height: 4200 mm

Diameter and overall height variable.

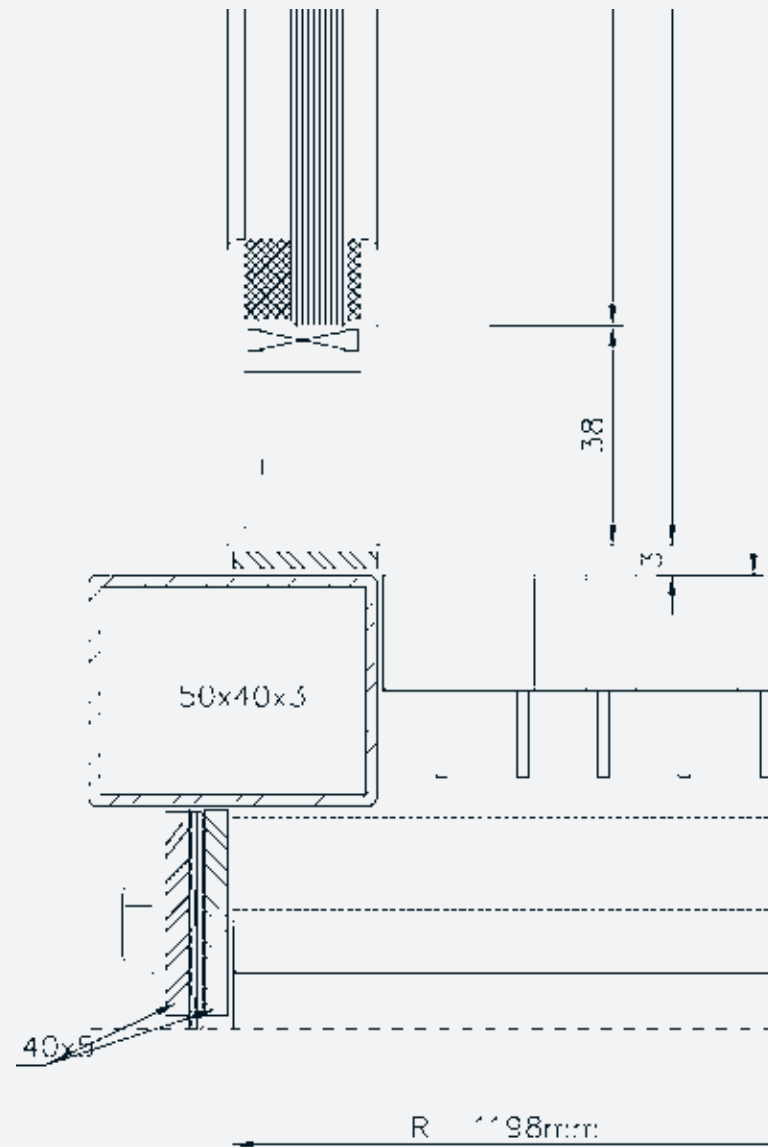


DISTINCTIVE FEATURES

Fully automatic revolving door with bespoke glass drum wall structure. Integrated glass night lock, activation devices integrated into both sides of drum walls, all visible parts anodised.




REVOLVING

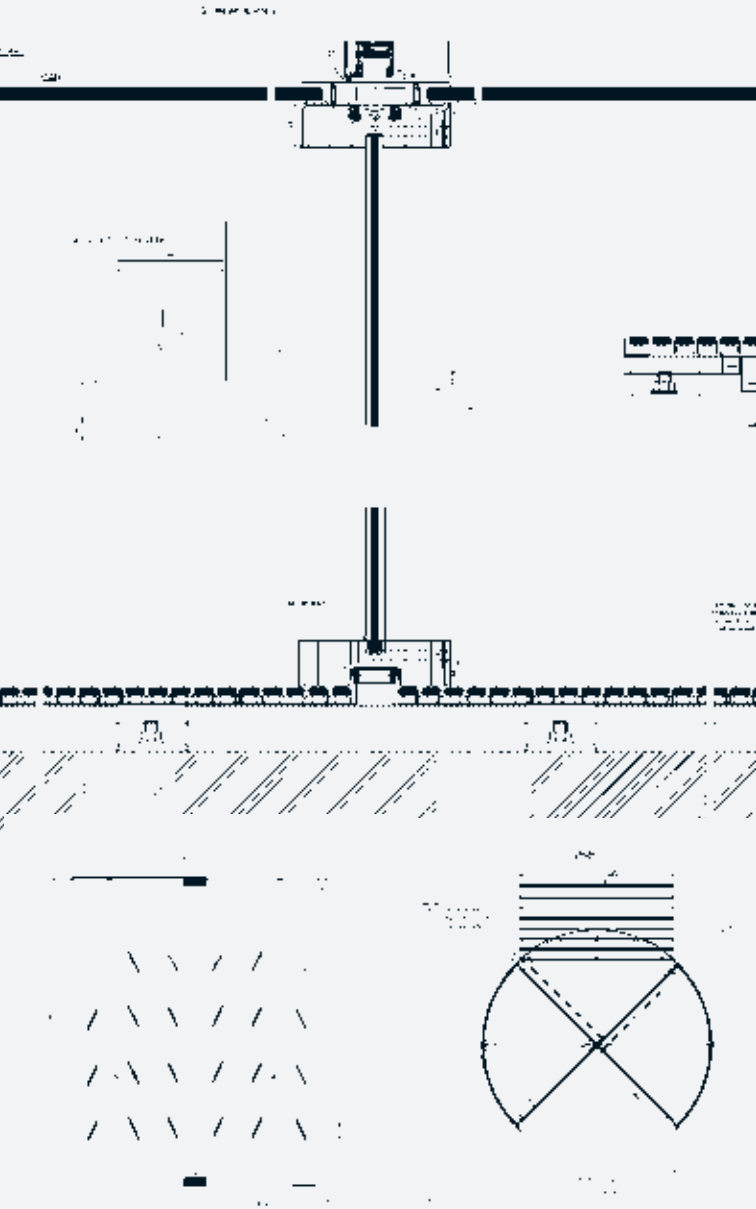

4-LEAF REVOLVING DOOR DOOR TYPE K 41

Diameter: 2200 mm
Passage height: 2850 mm
Glass canopy: 16 mm

Diameter and overall height variable.

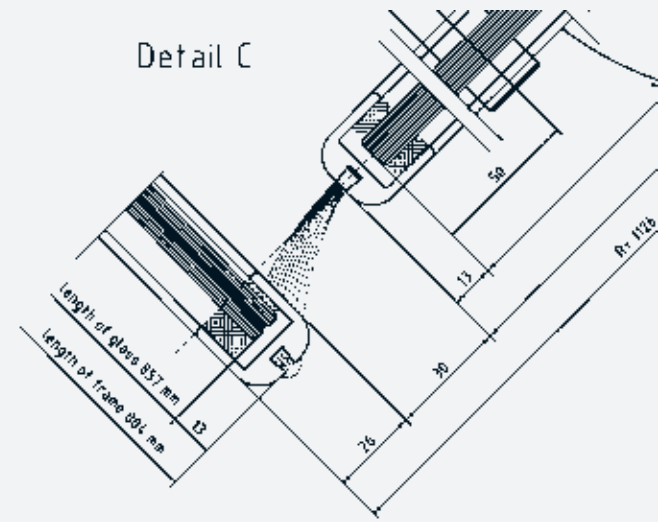

DISTINCTIVE FEATURES

Manual all-glass VITRO revolving door with satin glass canopy and frameless turnstile centre. Bespoke stainless steel pull handles. All visible components anodized.







REVOLVING

UNDERFLOOR 4-LEAF REVOLVING DOOR DOOR TYPE K 41

Diameter: 2800 mm
Passage height: 3000 mm
Glass canopy: 16 mm

Diameter and overall height variable. Underfloor drive units require a minimum depth of 350 mm.

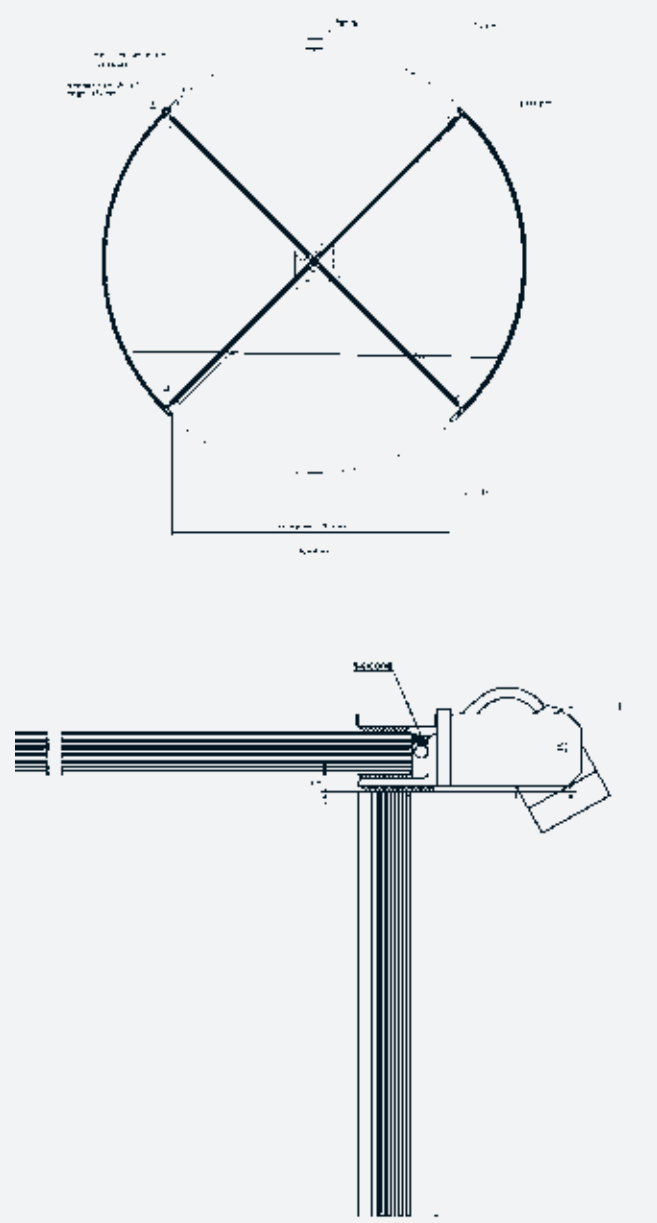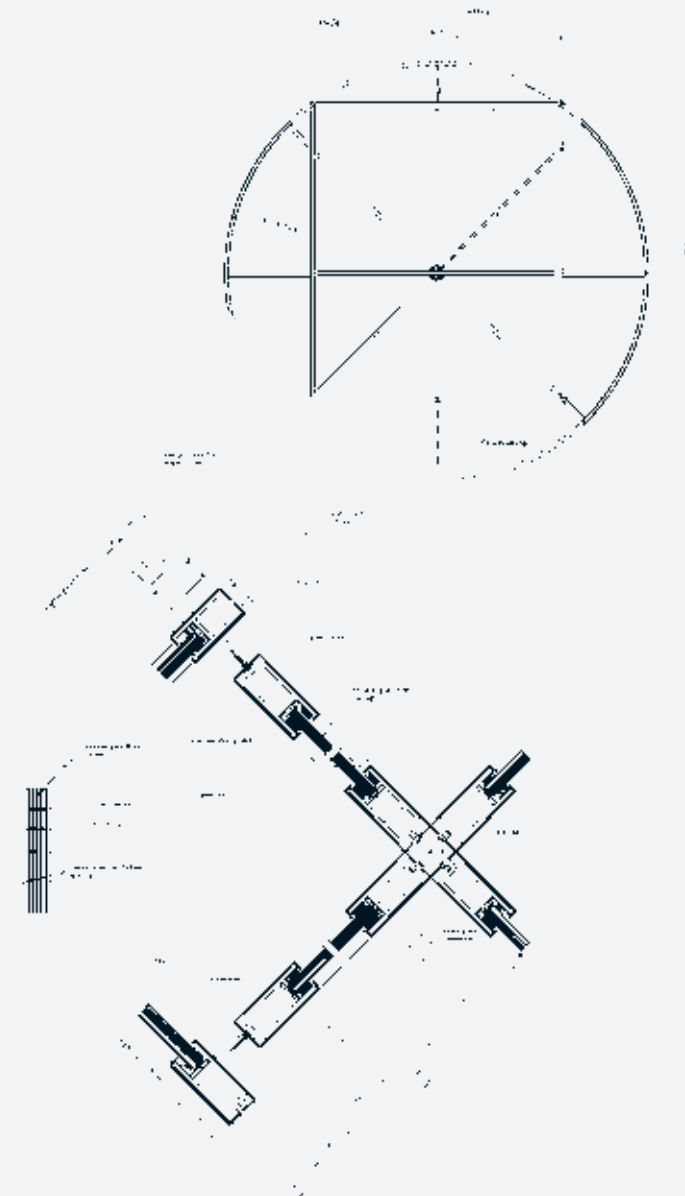

DISTINCTIVE FEATURES

Fully automatic all-glass VITRO revolving door. Drive unit concealed in the basement ceiling and connected by means of continuous drive shaft. Drum walls consisting of a single piece of glass. All visible components in satin stainless steel finish.






A large, modern glass entrance with two revolving doors and a central set of double doors. The building is highly reflective, showing surrounding structures. The floor is polished and reflects the entrance area.





REVOLVING

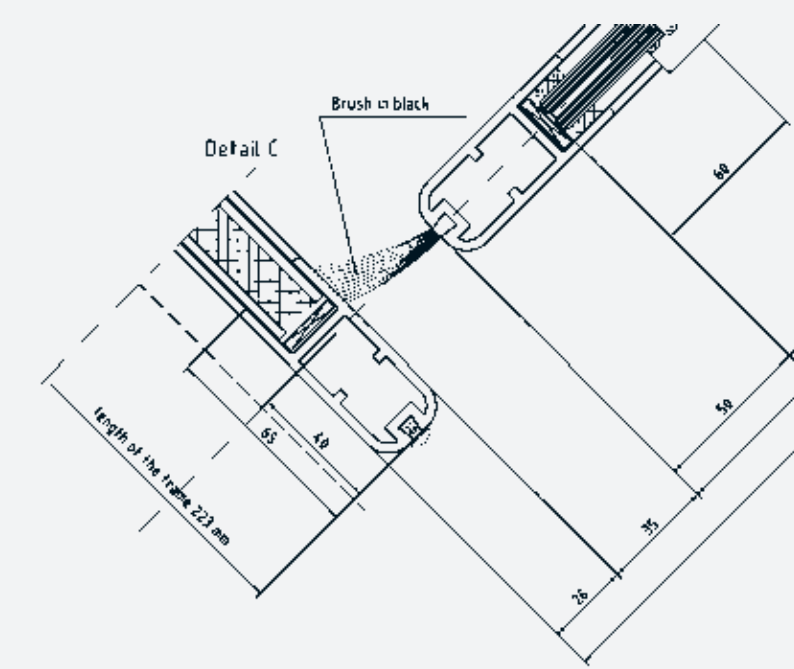

UNDERFLOOR 4-LEAF REVOLVING DOOR DOOR TYPE K 41

Diameter: 3000 mm
Passage height: 3900 mm
Installation depth: 500 mm


Diameter and overall height variable. Underfloor drive units require a minimum depth of 350 mm.

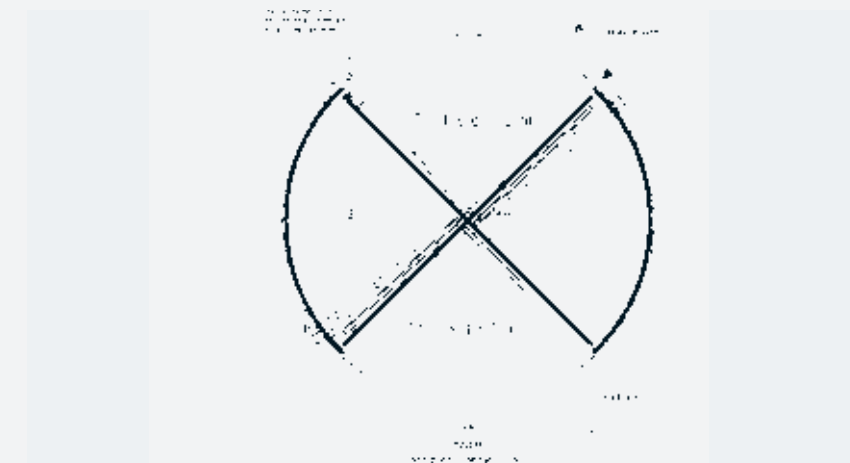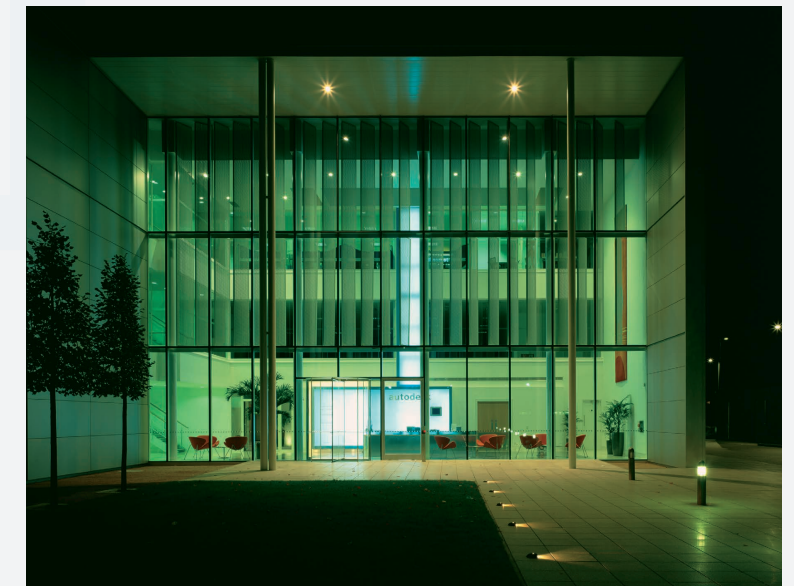

DISTINCTIVE FEATURES

Fully automatic all-glass VITRO revolving door with concealed underfloor drive unit. Activation by means of DownTec movement sensors integrated in the floor. All visible components have a bespoke anodized finish.


REVOLVING

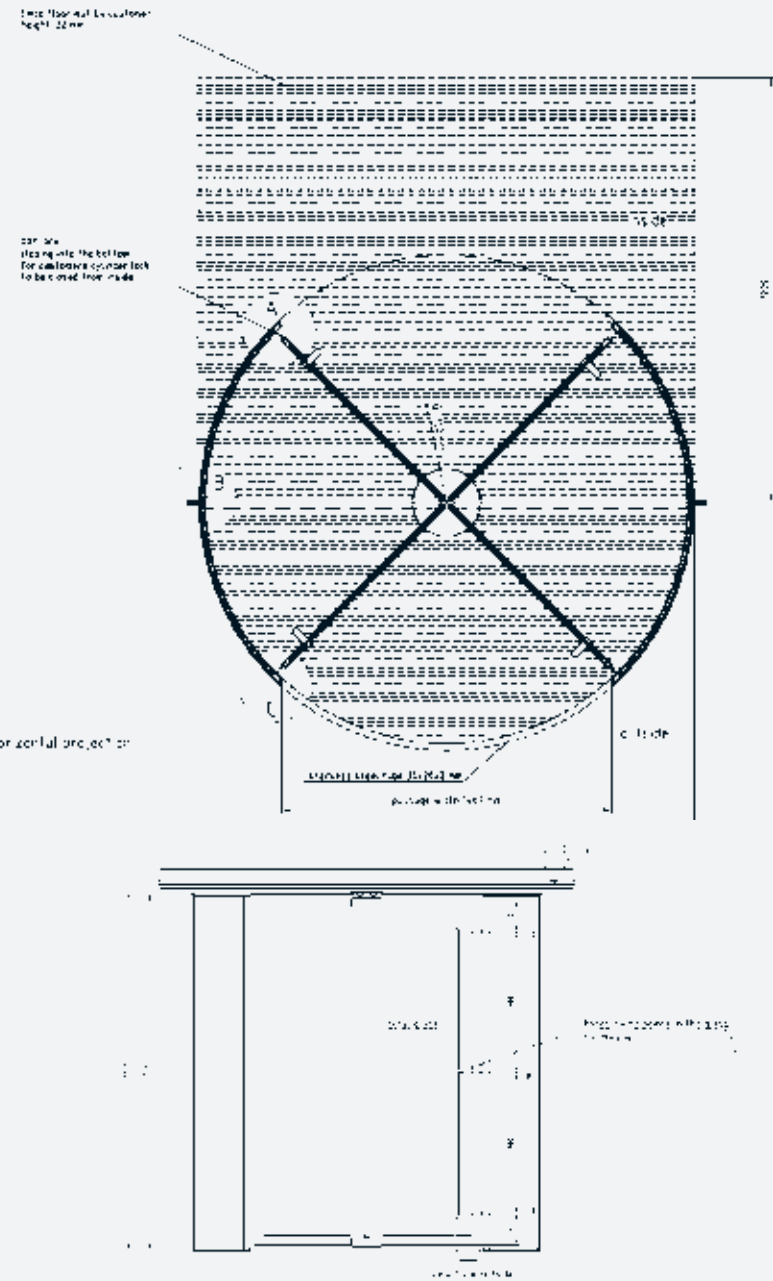

4-LEAF REVOLVING DOOR DOOR TYPE K 41

Diameter: 2200 mm
Passage height: 2770 mm
Glass canopy: 16 mm

Diameter and overall height variable.

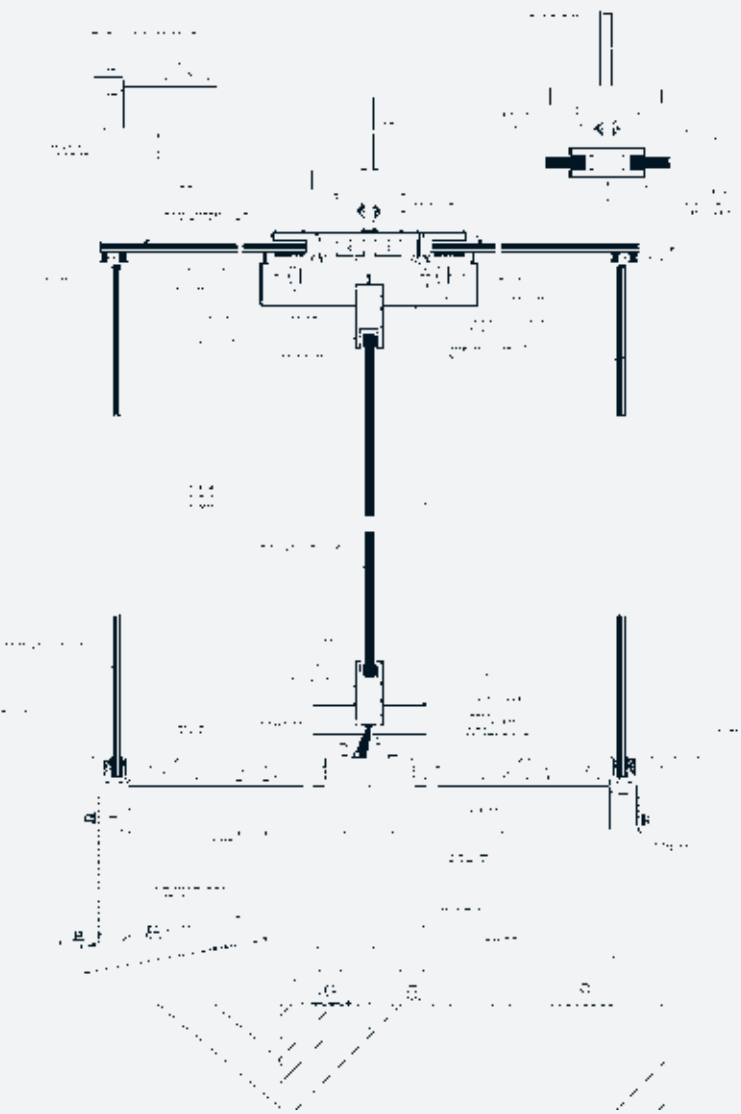

DISTINCTIVE FEATURES

Manual all-glass VITRO revolving door with glass canopy. Frameless turnstile centre. All visible components in satin stainless steel finish.





REVOLVING



4-LEAF REVOLVING DOOR
DOOR TYPE K 41

Diameter: 2266 mm
Passage height: 2900 mm
Overall height: 3300 mm

Diameter and overall height variable.

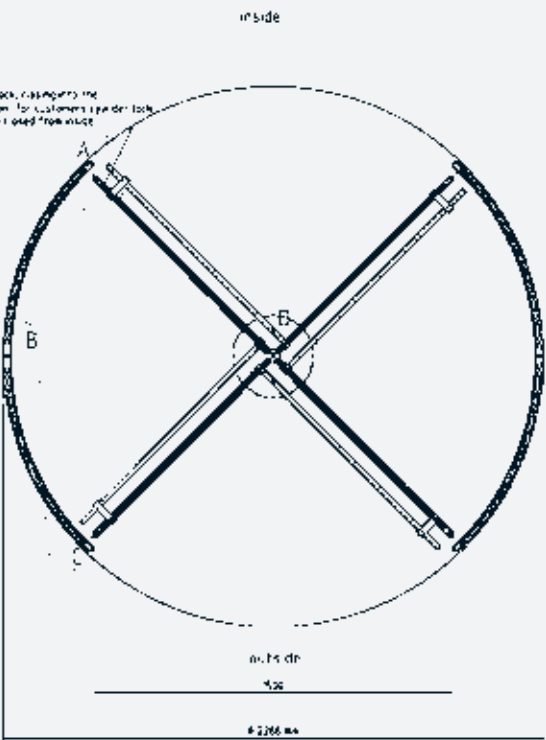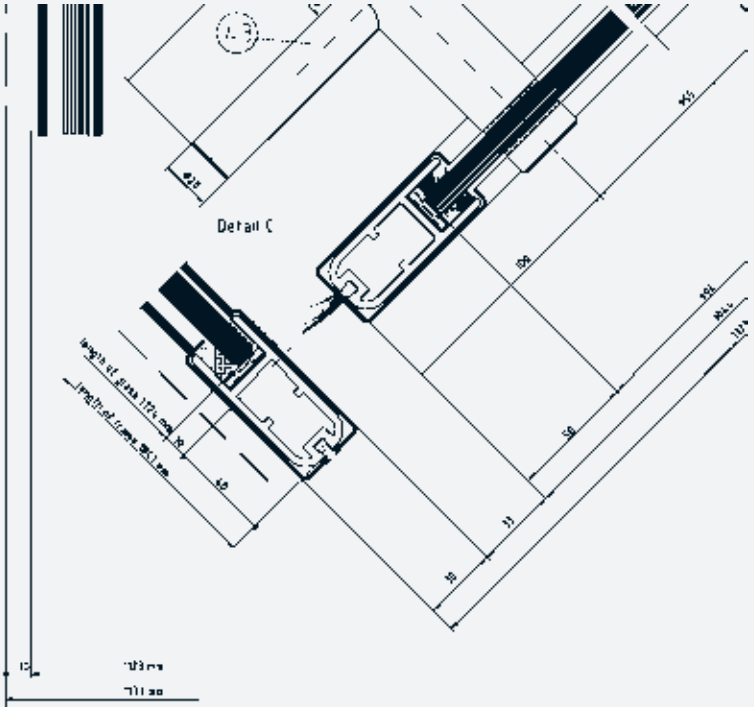

DISTINCTIVE FEATURES

Manual all-glass VITRO revolving door with all-glass drum walls.
Frameless turnstile centre. All visible components in satin stainless steel finish.





REVOLVING

UNDERFLOOR 4-LEAF REVOLVING DOOR DOOR TYPE K41

Diameter: 2500 mm
Passage height: 4800 mm
Installation depth: 300 mm

Diameter and overall height variable. Underfloor drive units require a minimum depth of 350 mm.

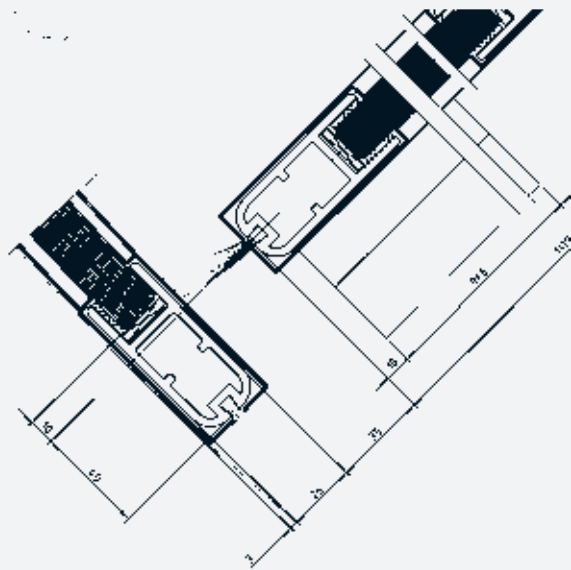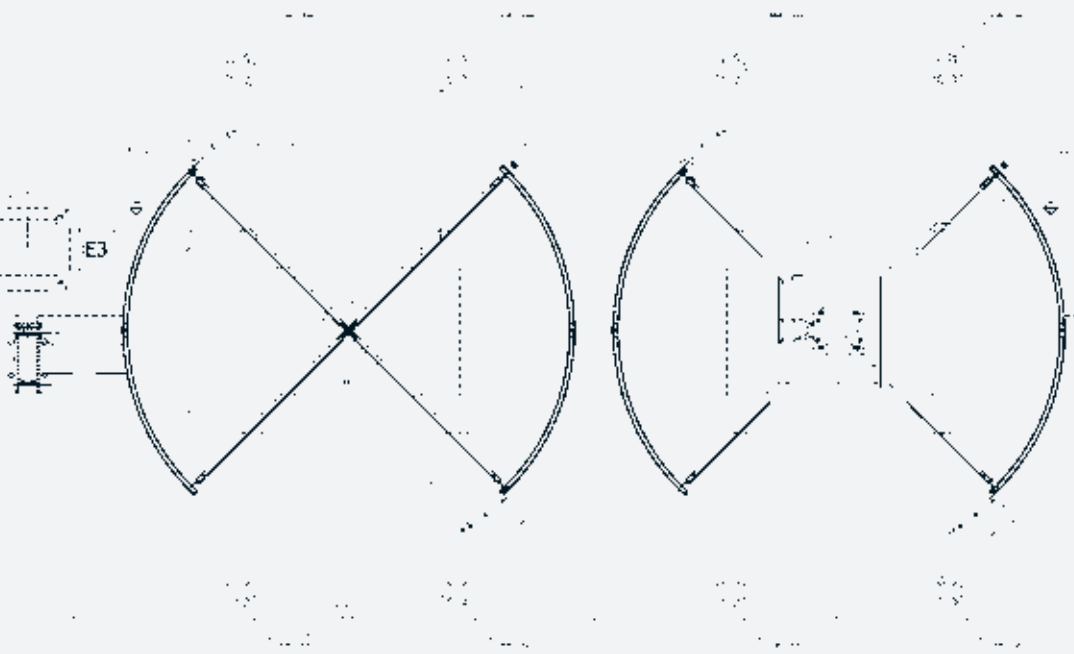


DISTINCTIVE FEATURES

Fully automatic all-glass VITRO revolving door with concealed underfloor drive unit. Activation by means of DownTec movement sensors integrated in the floor. All visible components in satin stainless steel finish.







REVOLVING

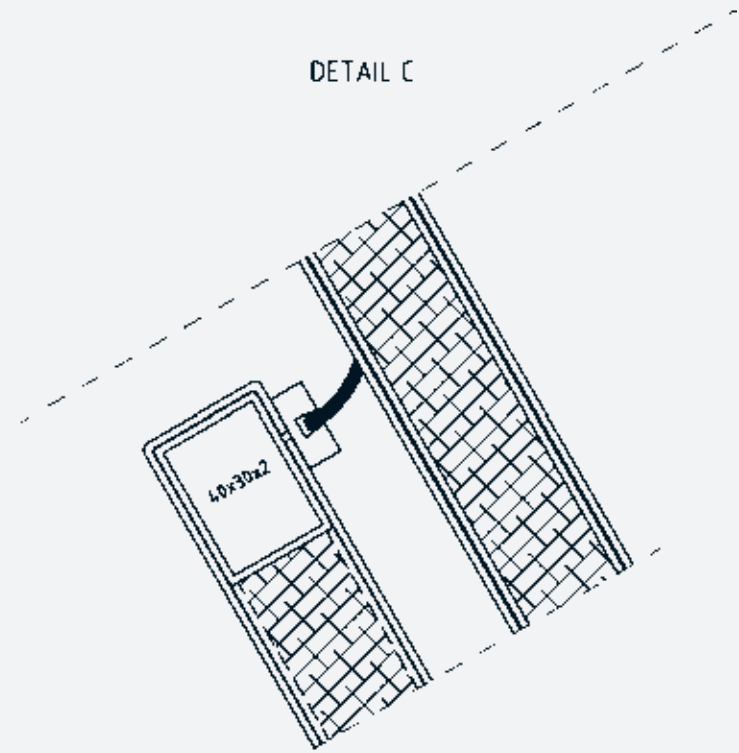

3-LEAF REVOLVING DOOR
DOOR TYPE K 31

Diameter: 2000 mm
Passage height: 2200 mm
Overall height: 2350 mm


Diameter and overall height variable.

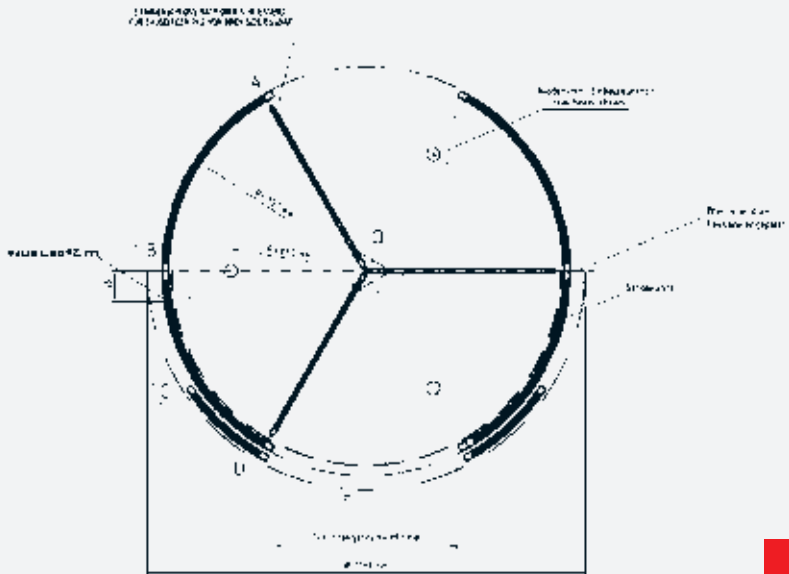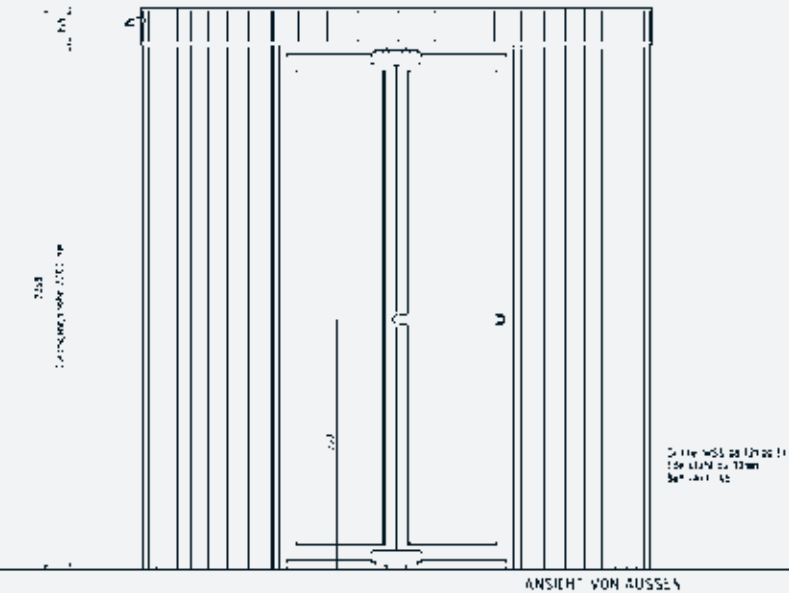

DISTINCTIVE FEATURES

Manual revolving door with drum walls consisting of flush panels, integrated external flush panel night lock door leaves. All visible parts RAL powder coated.

REVOLVING

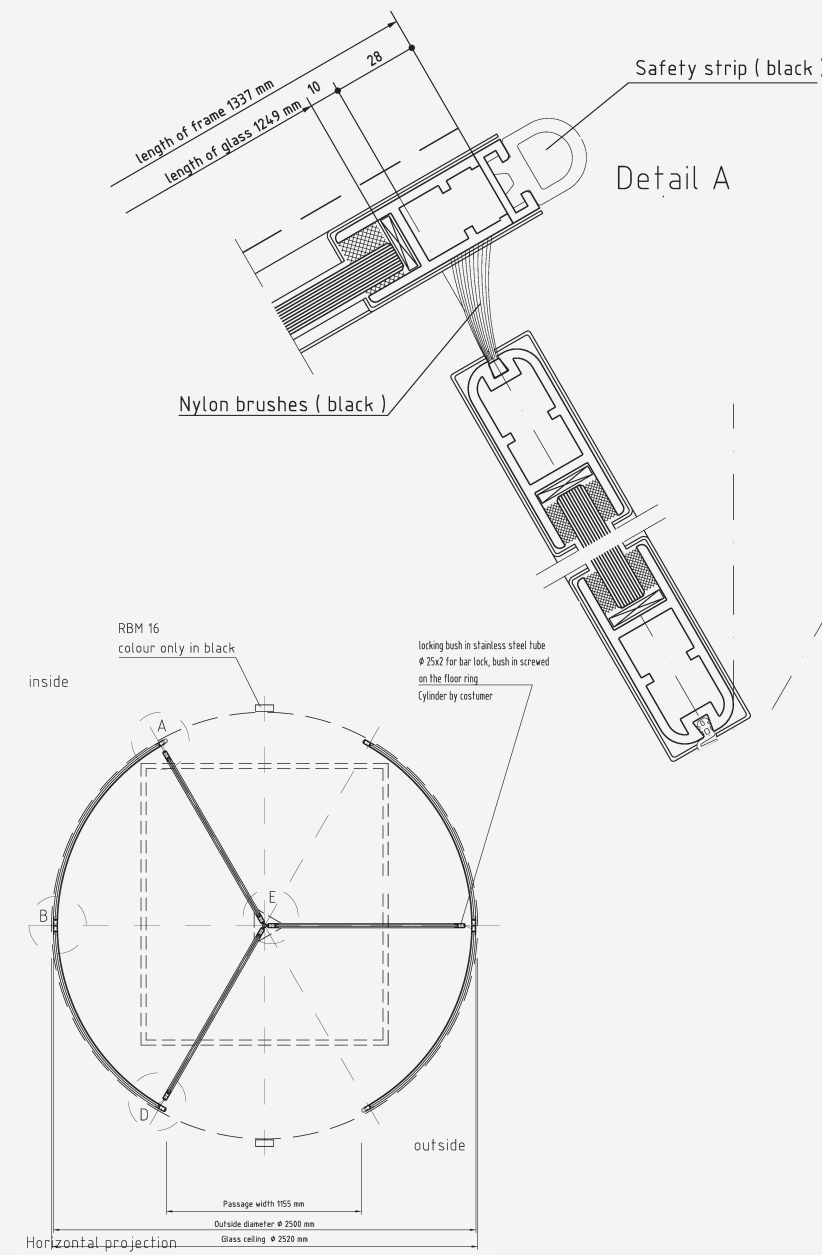


UNDERFLOOR 3-LEAF REVOLVING DOOR

DOOR TYPE K 31

Diameter: 2500 mm
Passage height: 3000 mm
Installation depth: 300 mm

Diameter and overall height variable. Underfloor drive units require a minimum depth of 350 mm.

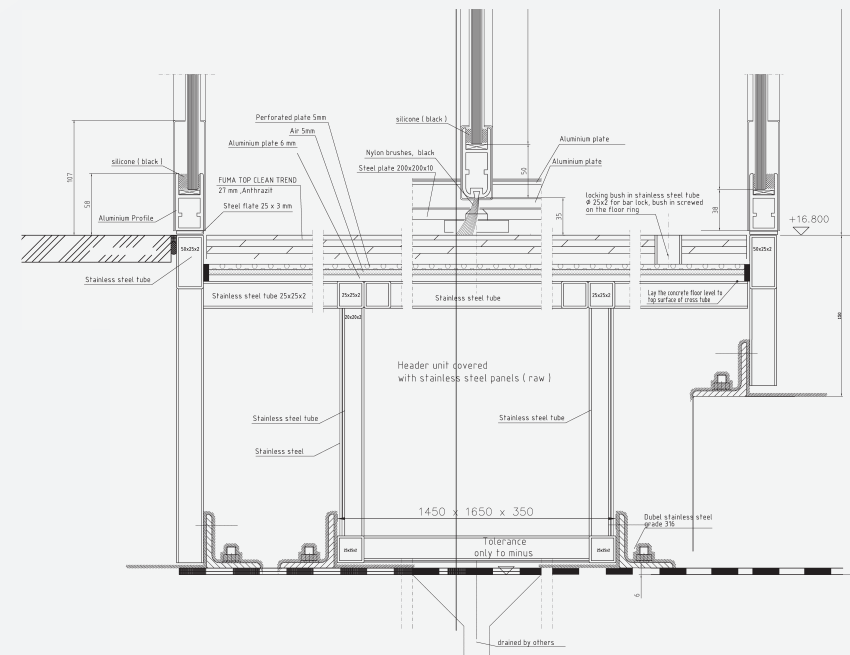

DISTINCTIVE FEATURES

Fully automatic all-glass VITRO revolving door with concealed underfloor drive unit. All visible components in satin stainless steel.





REVOLVING


3-LEAF REVOLVING DOOR DOOR TYPE K31

Diameter: 2160 mm

Passage height: 2250 mm

Overall height: 2550 mm

Diameter and overall height variable.

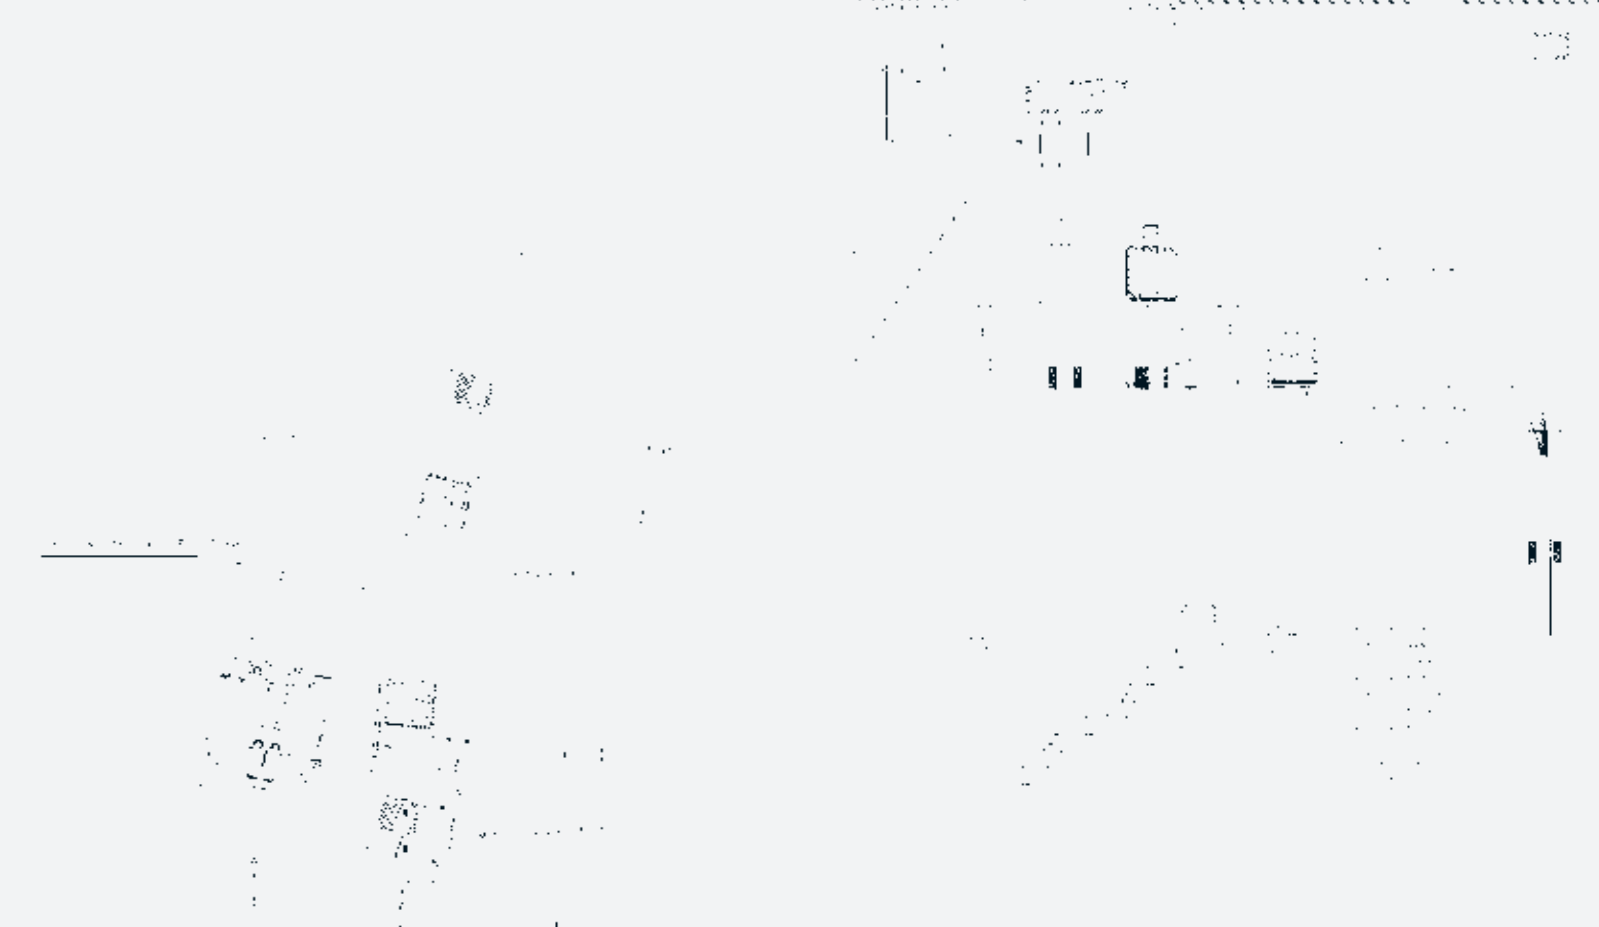


DISTINCTIVE FEATURES

Fully automatic revolving door. Drum walls consisting of security alarm glass. Security alarm glass night lock door leaf integrated externally. All visible parts in satin stainless steel finish.



REVOLVING



4-LEAF REVOLVING DOOR DOOR TYPE K 41

Diameter:	1950 mm
Passage height:	2500 mm
Overall height:	2610 mm

Diameter and overall height variable.



DISTINCTIVE FEATURES

Manual revolving door, turnstile and drum walls consisting of solid milled steel. Collapsible turnstile leaves. Night lock integrated internally and externally. Floor covering: circular stainless steel grille. All visible parts RAL powder coated.








REVOLVING

3-LEAF REVOLVING DOOR DOOR TYPE K 31

Diameter: 5140 mm
 Passage height: 2500 mm
 Overall height: 2900 mm


Diameter and overall height variable.

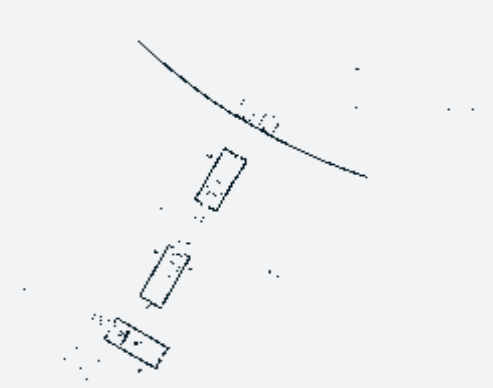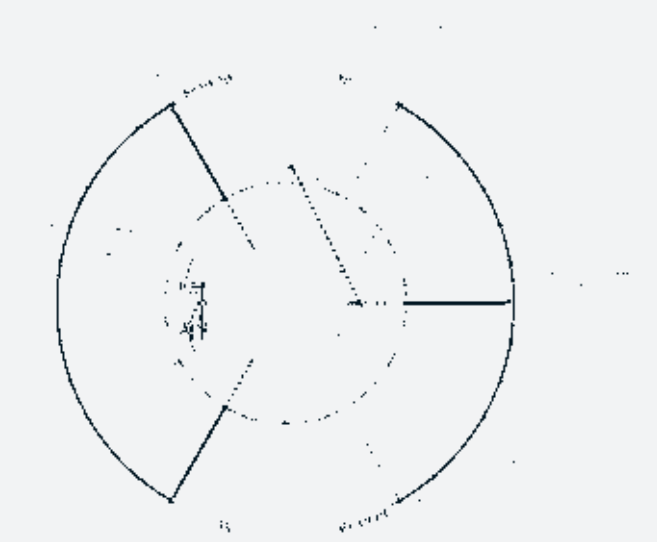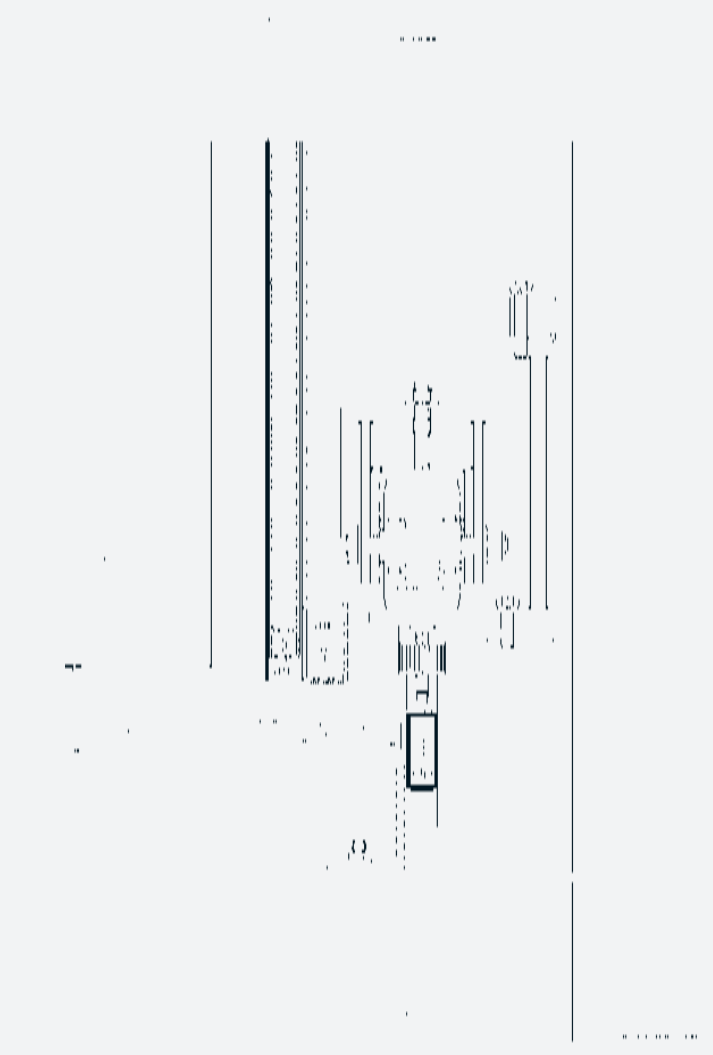

DISTINCTIVE FEATURES

Fully automatic revolving door with offset pelmet and glass canopy and concealed underfloor drive unit. Constructed around an existing concrete pillar. Turnstile leaves with swing door facility. Drum walls connected to glass canopy using point fixings. All visible parts in stainless steel finish.



REVOLVING

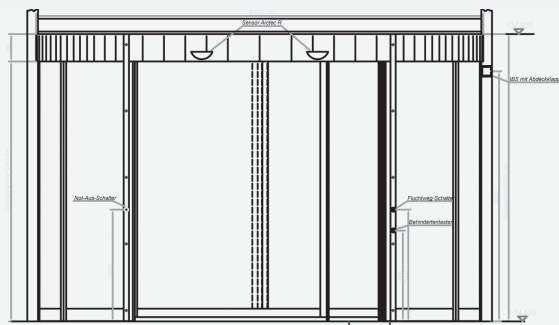

2-LEAF REVOLVING DOOR
DOOR TYPE K 21

Diameter: 4200 mm
Passage height: 2700 mm

Diameter and overall height variable.

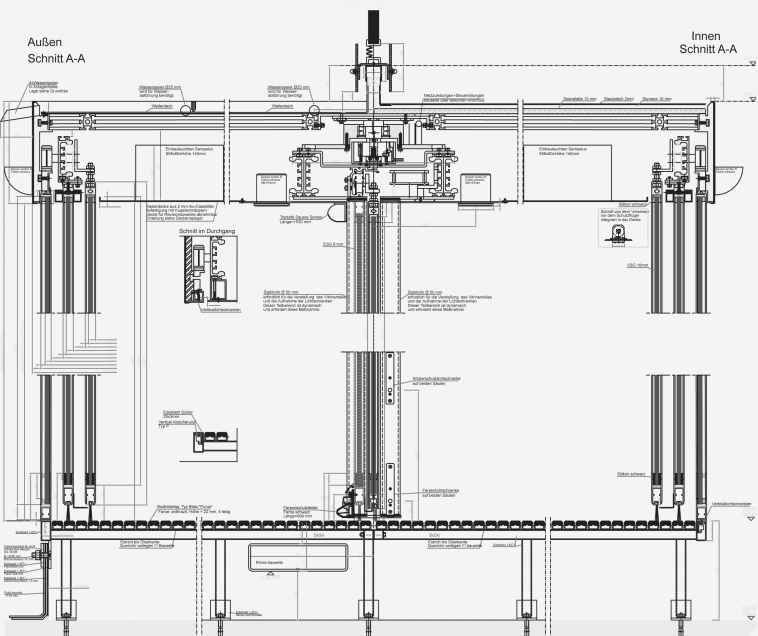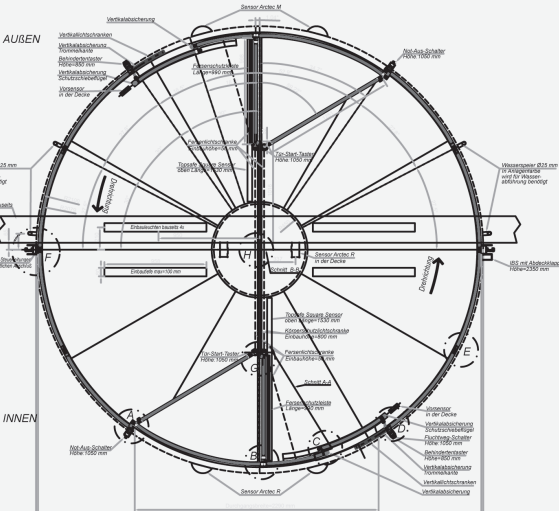


DISTINCTIVE FEATURES

Fully automatic 2-leaf revolving door with glass drum walls.
Integrated fully automatic sliding door and rotating centre piece.
Including rollback safety leaves. Surface in special RAL powder coating.






REVOLVING

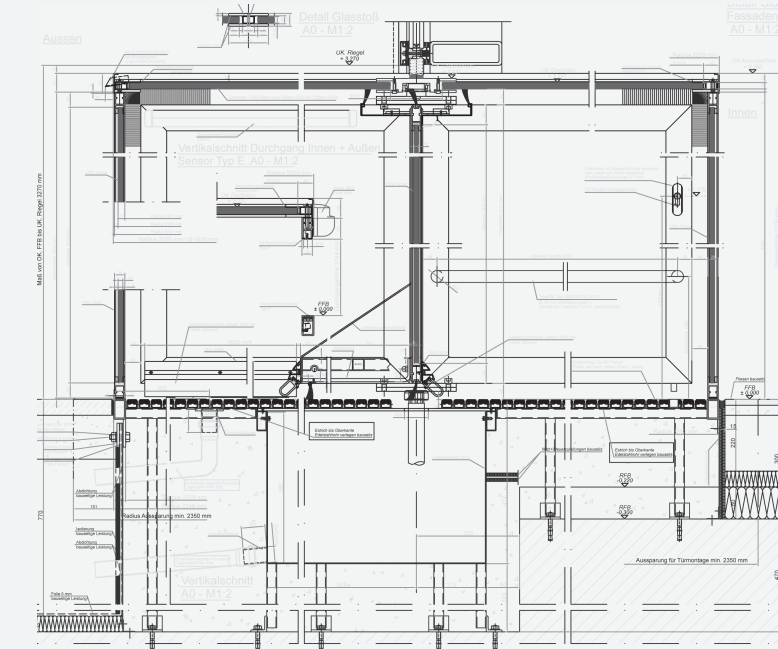

UNDERFLOOR 3-LEAF REVOLVING DOOR DOOR TYPE K 31

Passage width: 4500 mm
Passage height: 3100 mm
Installation depth: 400 mm

Diameter and overall height variable. Underfloor drive units require a minimum depth of 350 mm.

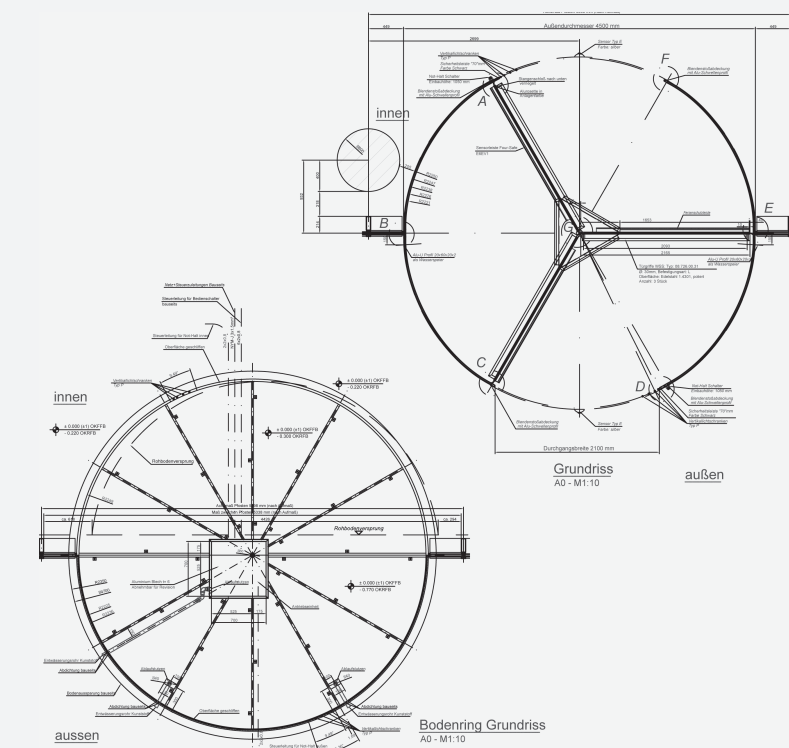

DISTINCTIVE FEATURES

Fully automatic underfloor revolving door in VITRO all glass design. Integration into building management system. All visible surfaces in special RAL powder coating.



REVOLVING



4-LEAF REVOLVING DOOR
DOOR TYPE K41

Diameter: 2000 mm
Passage height: 2300 mm
Overall height: 2600 mm

Diameter and overall height variable.

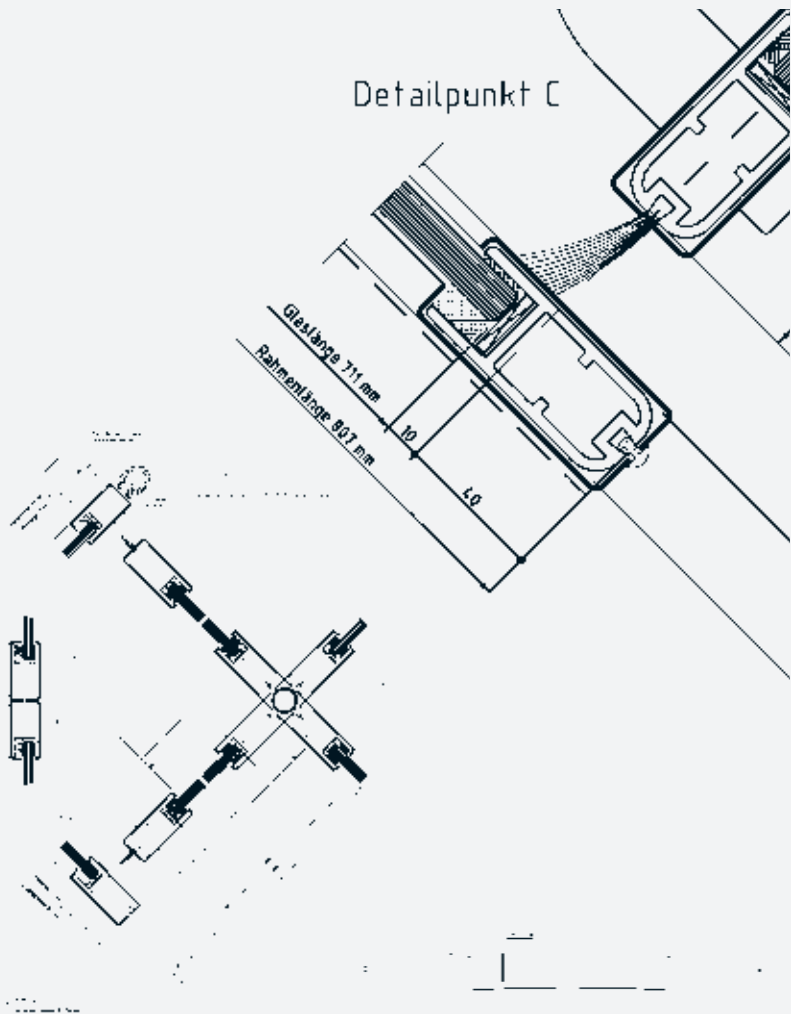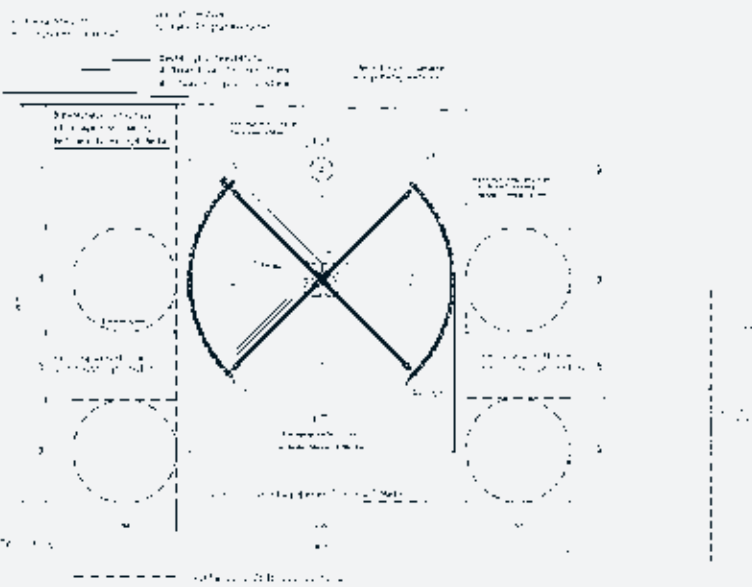

DISTINCTIVE FEATURES

Fully automatic revolving door with all-glass drum walls. Bespoke brass pull handles. All visible parts in polished brass finish.








REVOLVING

4-LEAF REVOLVING DOOR DOOR TYPE K 41

Diameter: 2650 mm
 Passage height: 2400 mm
 Overall height: 2700 mm


Diameter and overall height variable.

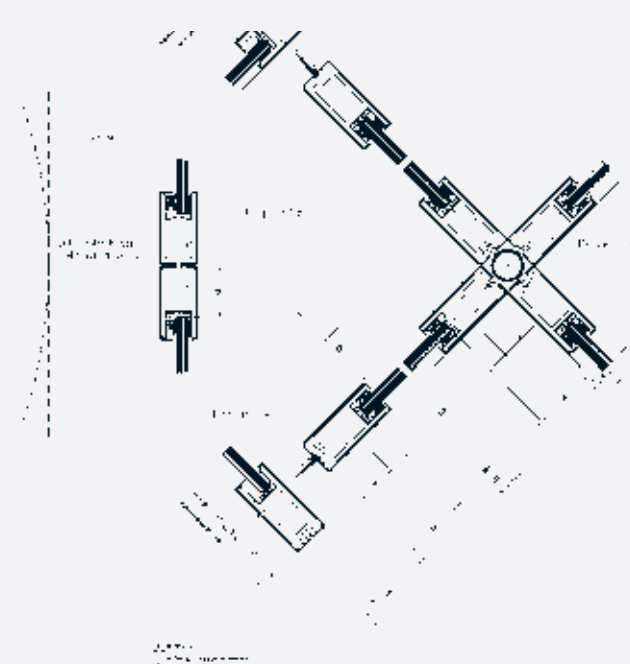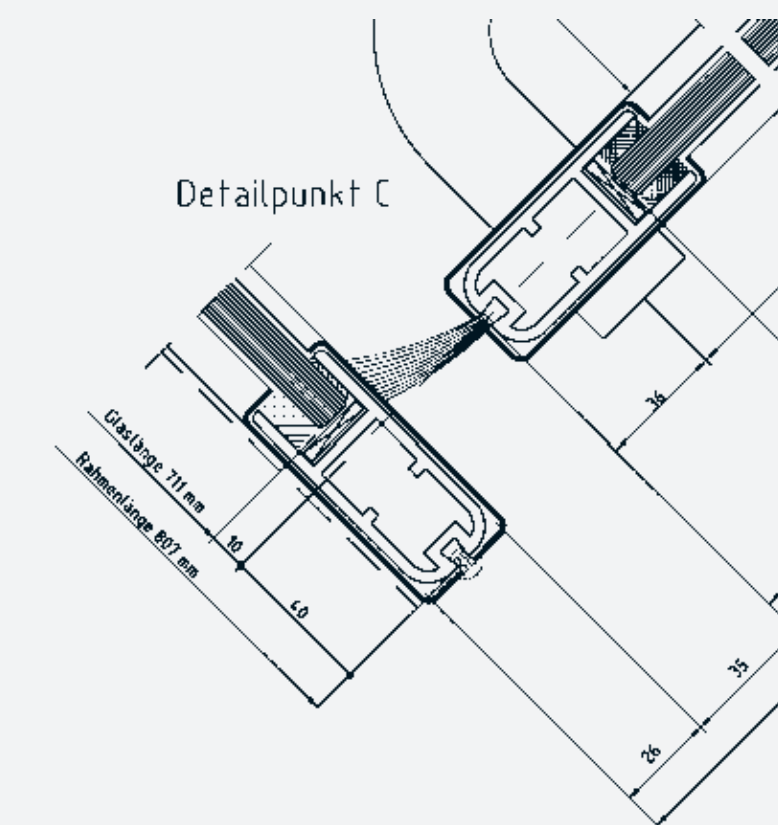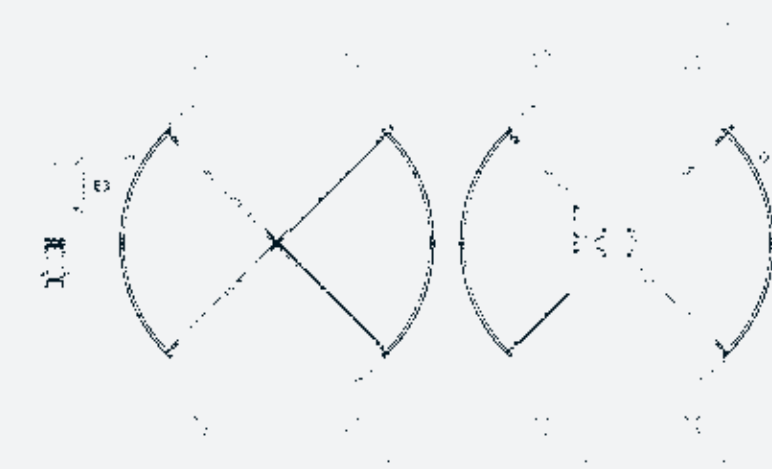

DISTINCTIVE FEATURES

Fully automatic revolving door with all-glass drum walls. Illuminated signage integrated in pelmet, Perspex-backed. All visible parts in polished brass finish.


REVOLVING

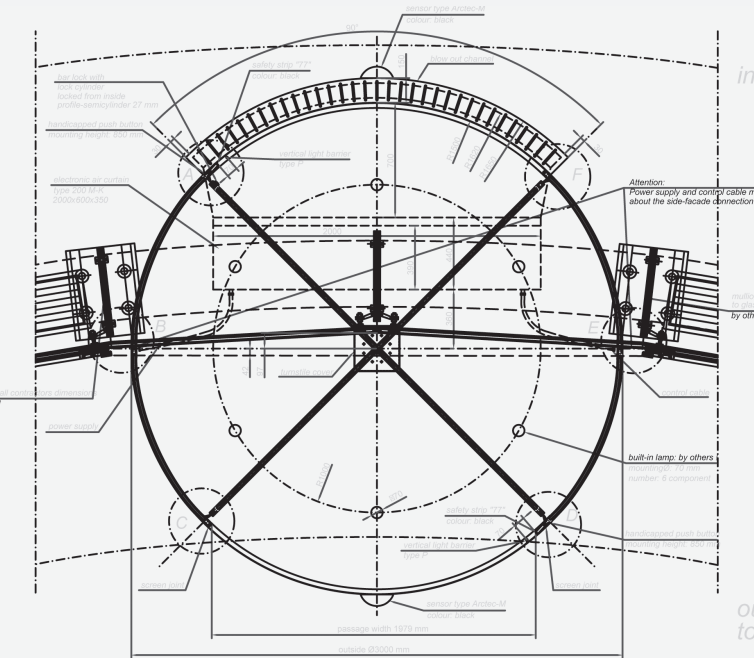

UNDERFLOOR 4-LEAF REVOLVING DOOR DOOR TYPE K 41

Diameter: 3000 mm
Passage height: 3200 mm
Overall height: 3700 mm

Diameter and overall height variable. Underfloor drive units require a minimum depth of 350 mm.

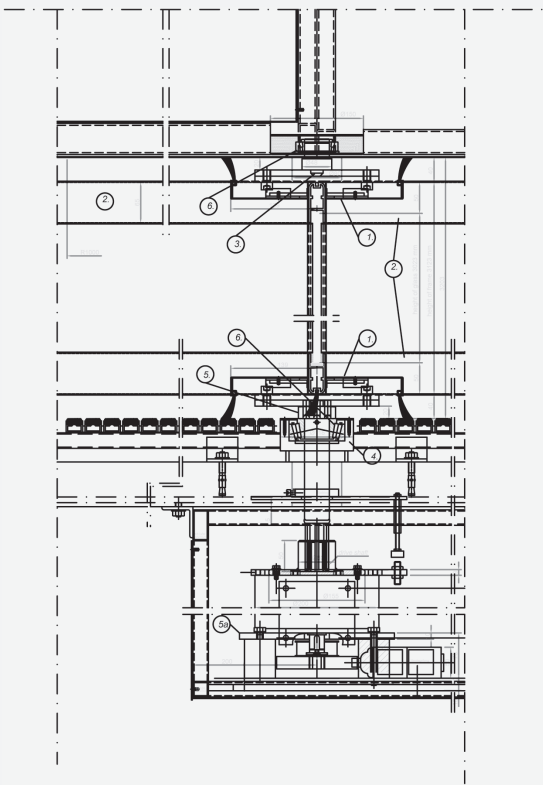

DISTINCTIVE FEATURES

Underfloor revolving door with internal canopy construction and safety glass roof on the outside. Integrated air curtain on inside. All visible surfaces in stainless steel satin finish.






REVOLVING

4-LEAF REVOLVING DOOR DOOR TYPE K 41

Diameter: 2500 mm
Passage height: 2250 mm
Overall height: 2450 mm

Diameter and overall height variable.

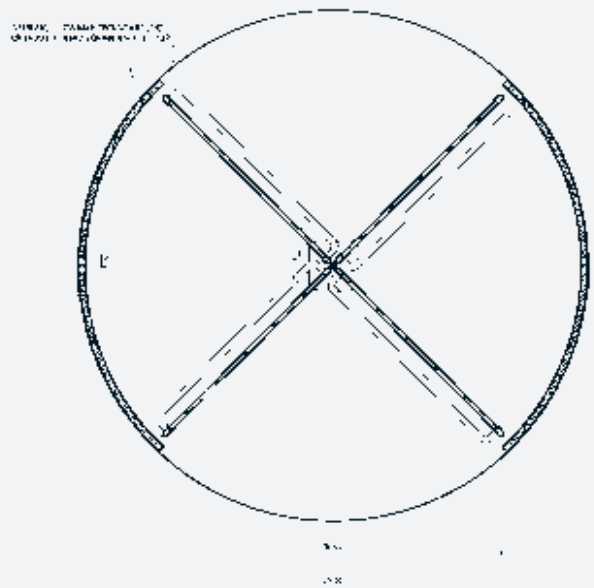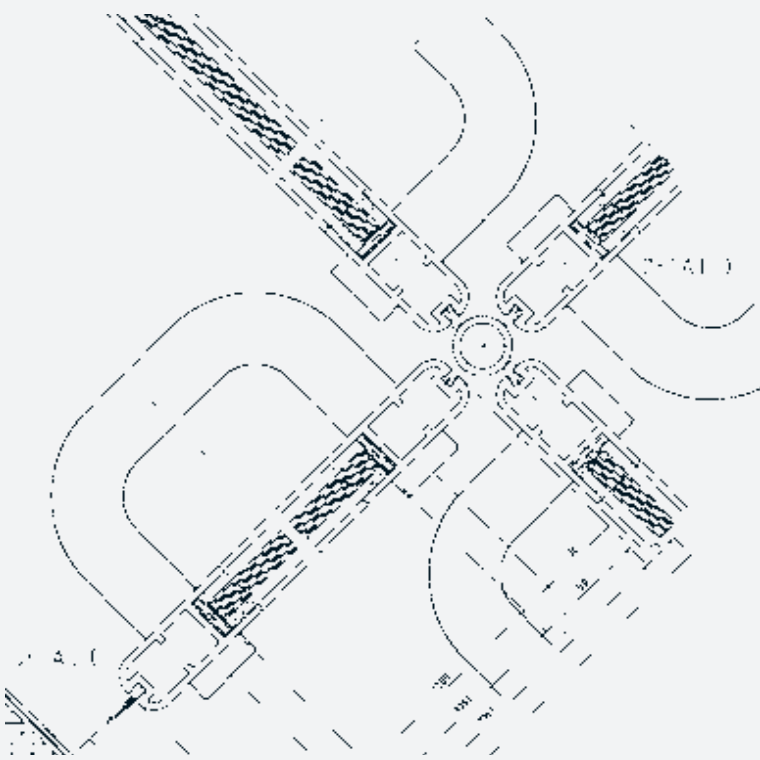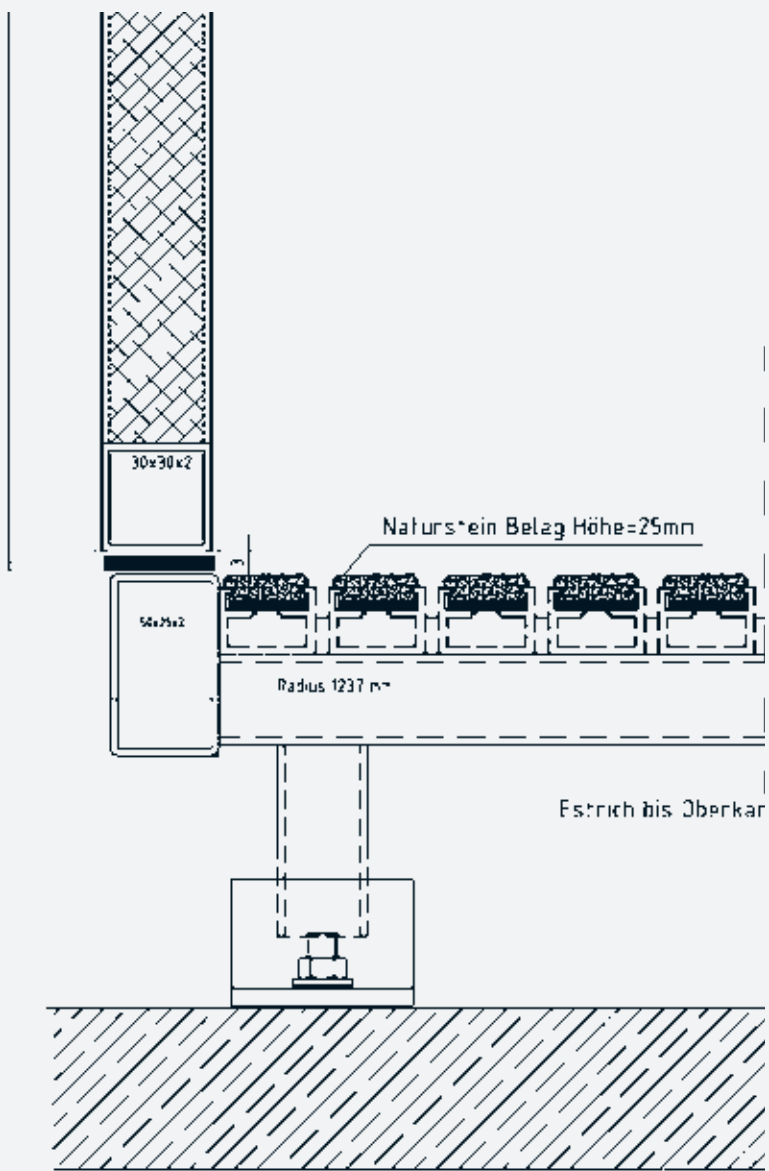


DISTINCTIVE FEATURES

Manual revolving door with flush panel drum walls. Turnstile leaves consisting of bronzed glass with brass pull handles. All visible part RAL powder coated.



REVOLVING

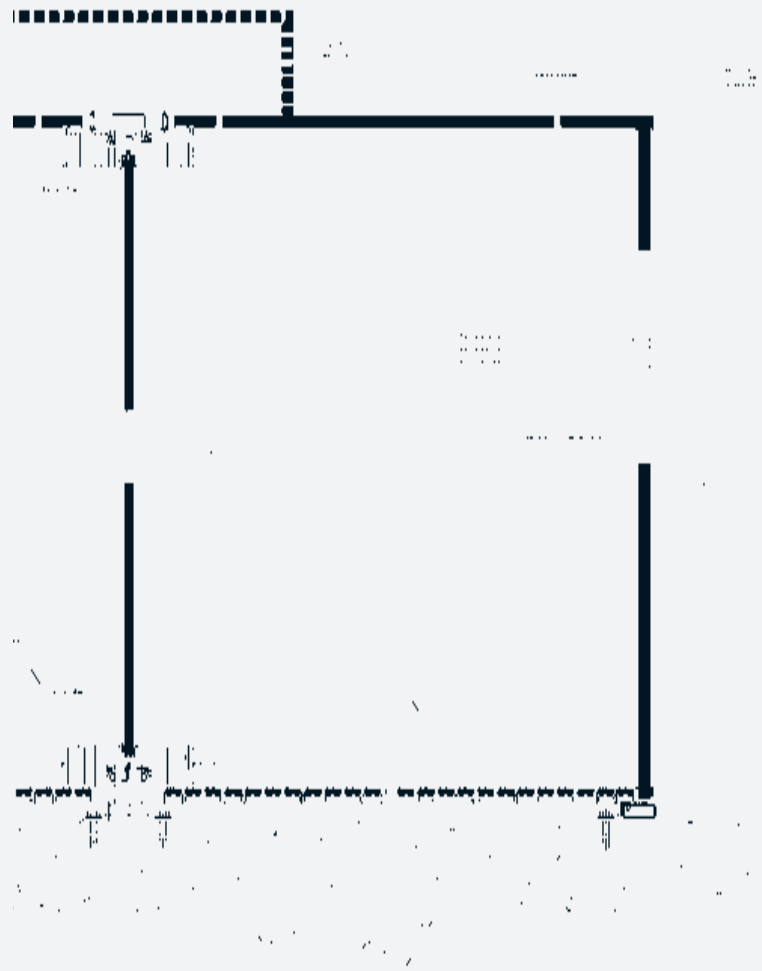



4-LEAF REVOLVING DOOR DOOR TYPE K 41

Diameter: 2100 mm

Passage height: 3250 mm

Glass canopy: 16 mm

Diameter and overall height variable.

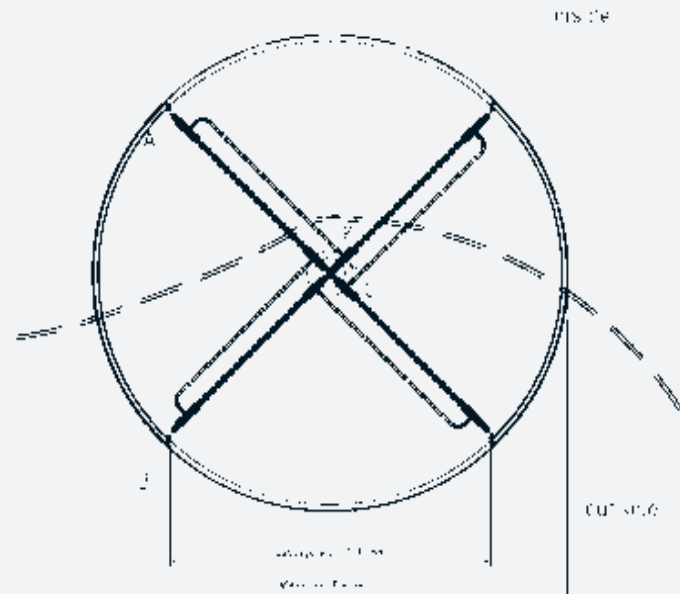
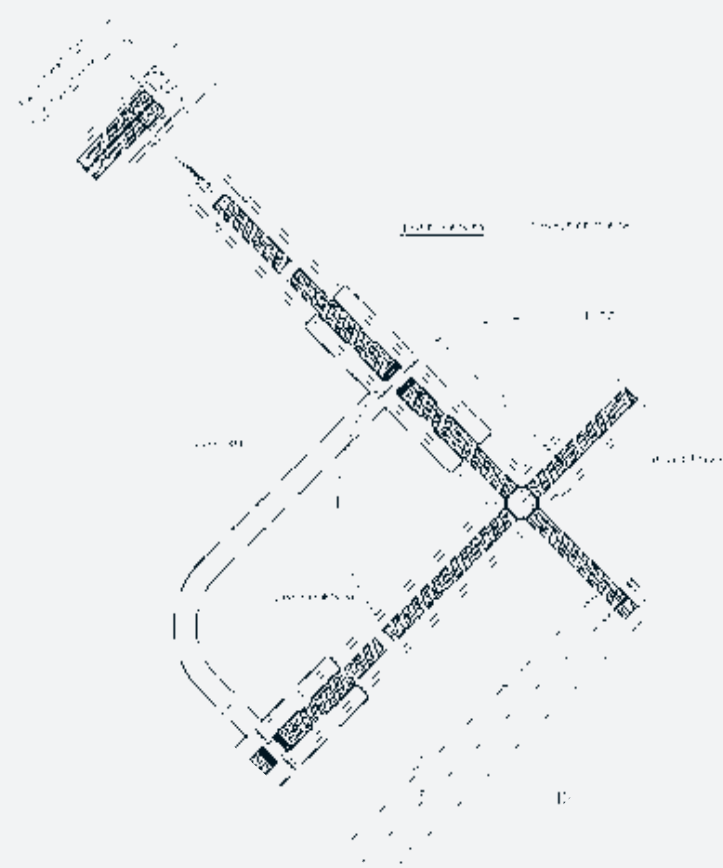


DISTINCTIVE FEATURES

Manual all-glass VITRO revolving door with glass canopy. Frameless turnstile centre and bespoke pull handles. All visible parts anodised.




REVOLVING

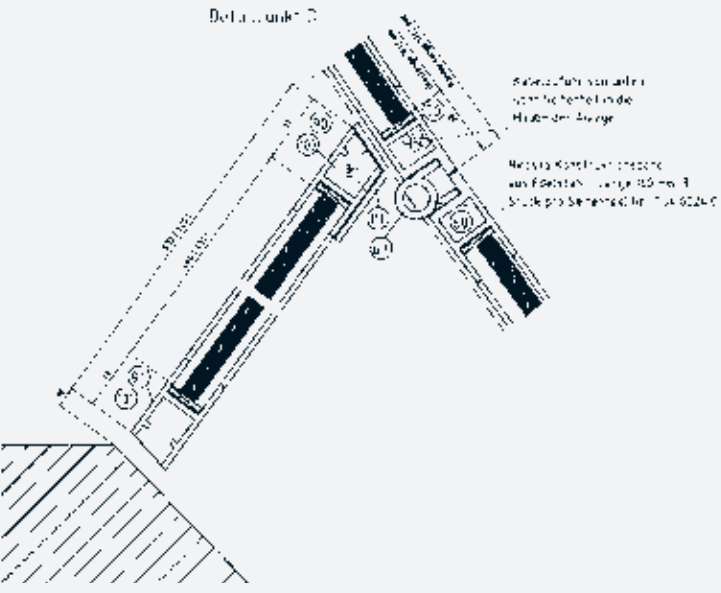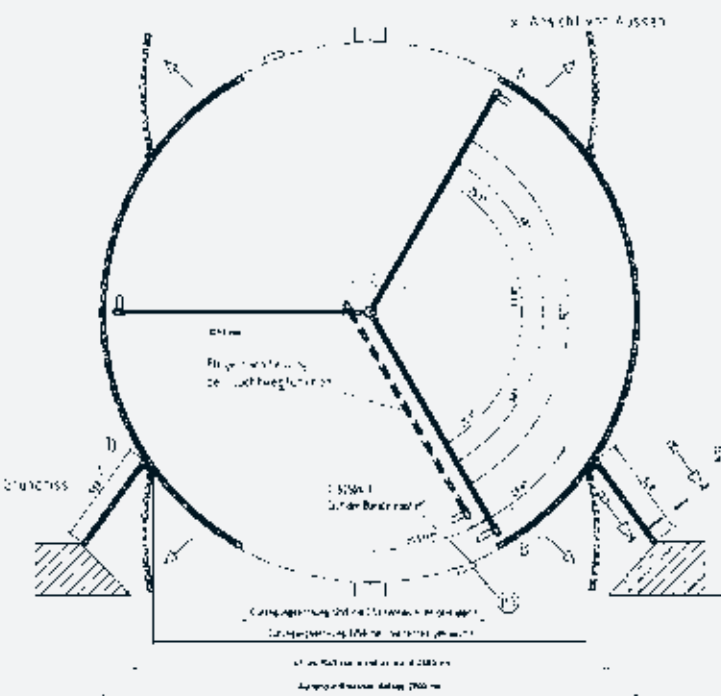

UNDERFLOOR 3-LEAF REVOLVING DOOR DOOR TYPE K 31

Diameter: 2800 mm
Passage height: 4250 mm
Overall height: 4450 mm

Diameter and overall height variable. Underfloor drive units require a minimum depth of 350 mm.


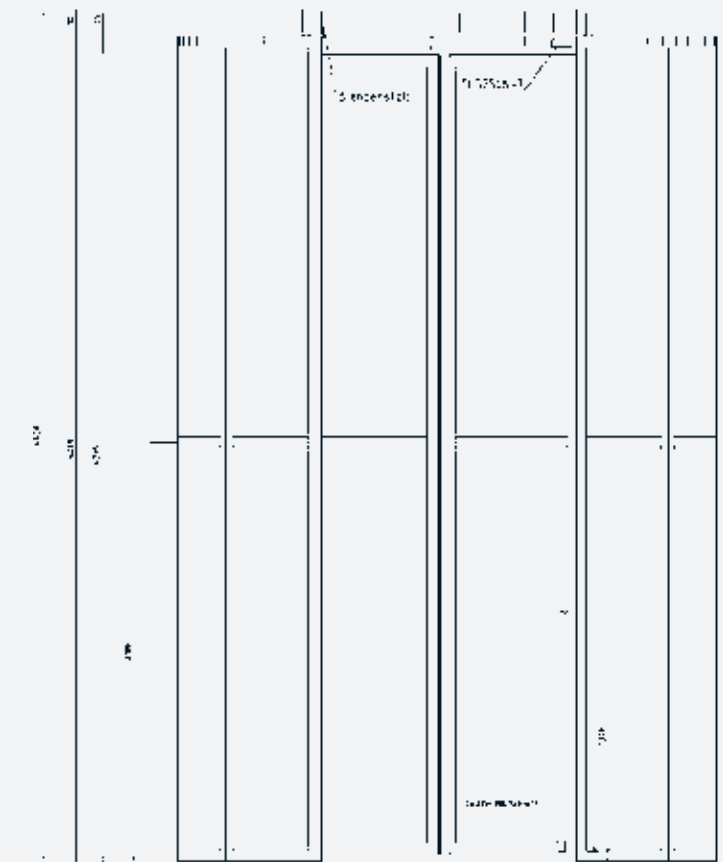


DISTINCTIVE FEATURES

Fully automatic all-glass revolving door with emergency escape function. Drive unit concealed in the basement ceiling and connected by means of continuous drive shaft. Turnstile leaves and drum walls partly collapsible. All visible components painted to resemble scale armour.



REVOLVING

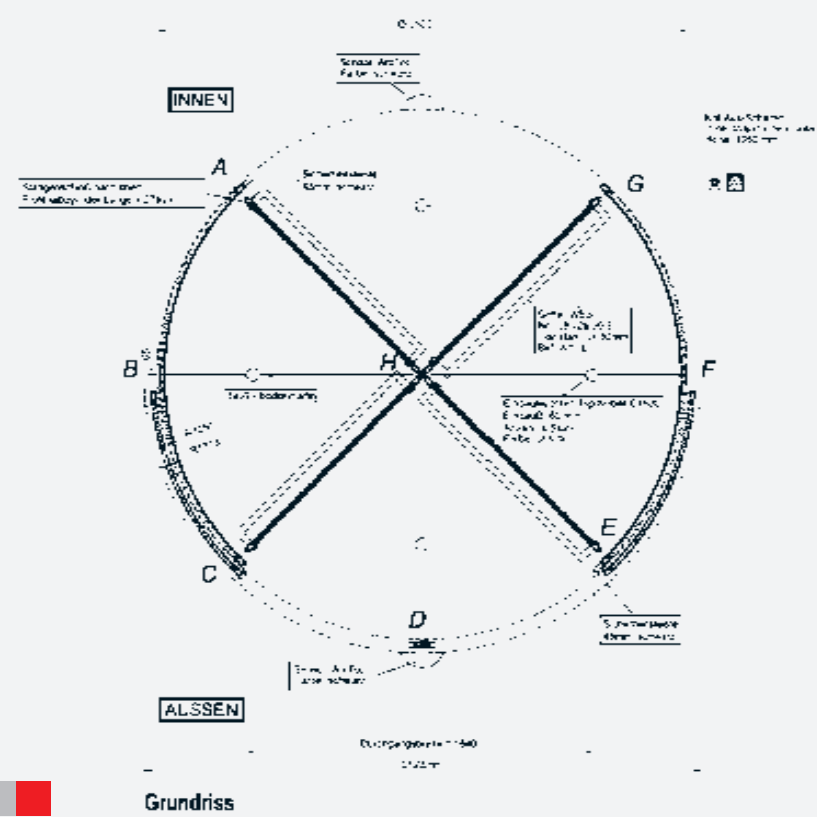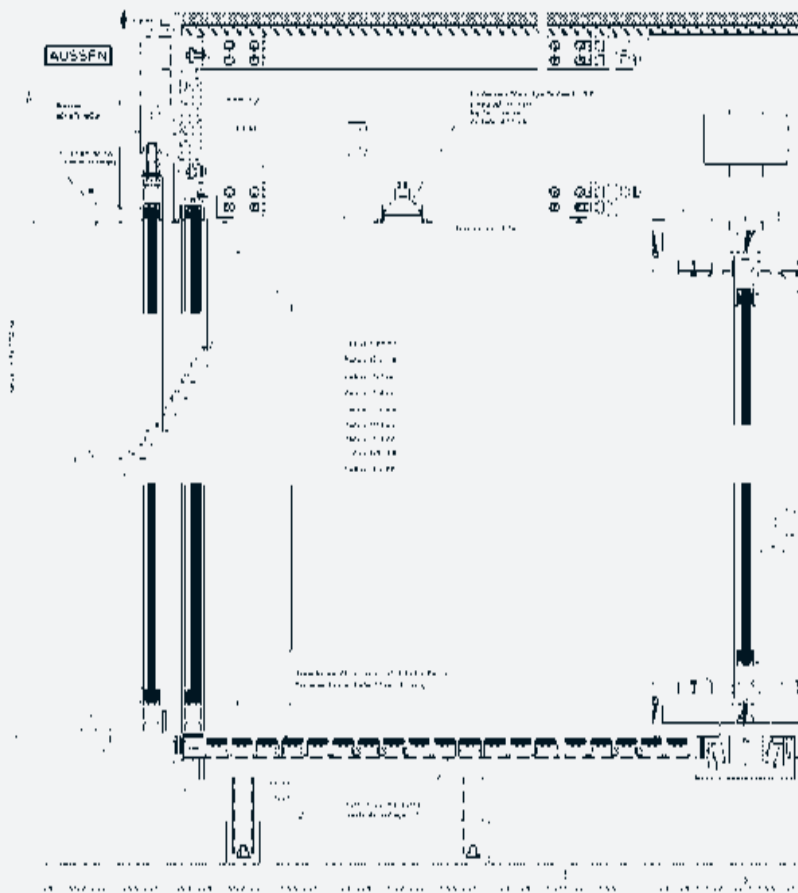

UNDERFLOOR 4-LEAF REVOLVING DOOR

DOOR TYPE K 41

Diameter:	2500 mm
Passage height:	2300 mm
Overall height:	2600 mm


Diameter and overall height variable. Underfloor drive units require a minimum depth of 350 mm.

DISTINCTIVE FEATURES

Fully automatic all-glass revolving door. Glass night lock door leaf integrated externally. All visible parts RAL powder coated.




REVOLVING

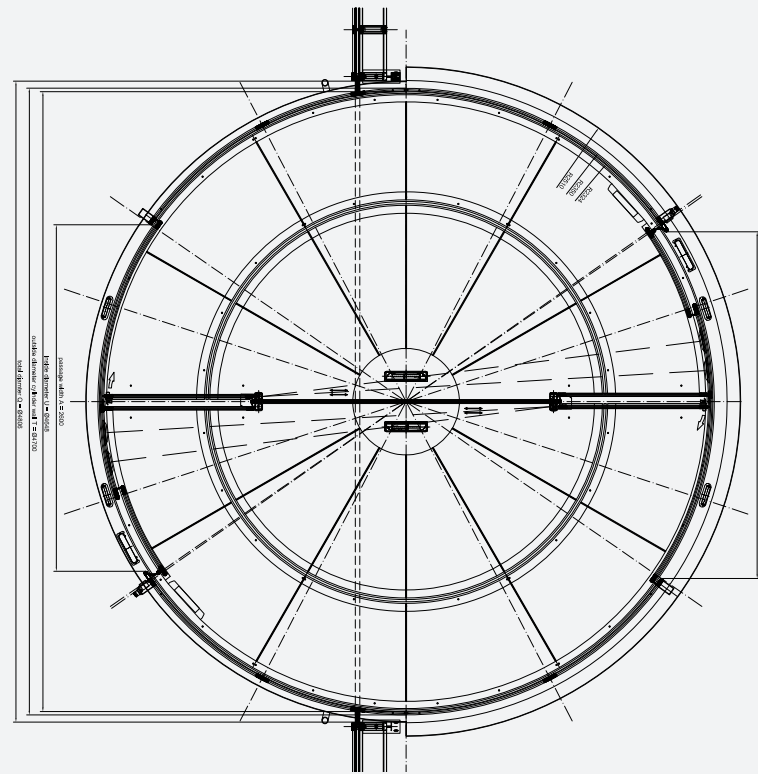

2-LEAF REVOLVING DOOR record K 21

Diameter: 4700 mm
Passage height: 2710 mm
Overall height: 3360 mm

Diameter and overall height variable.

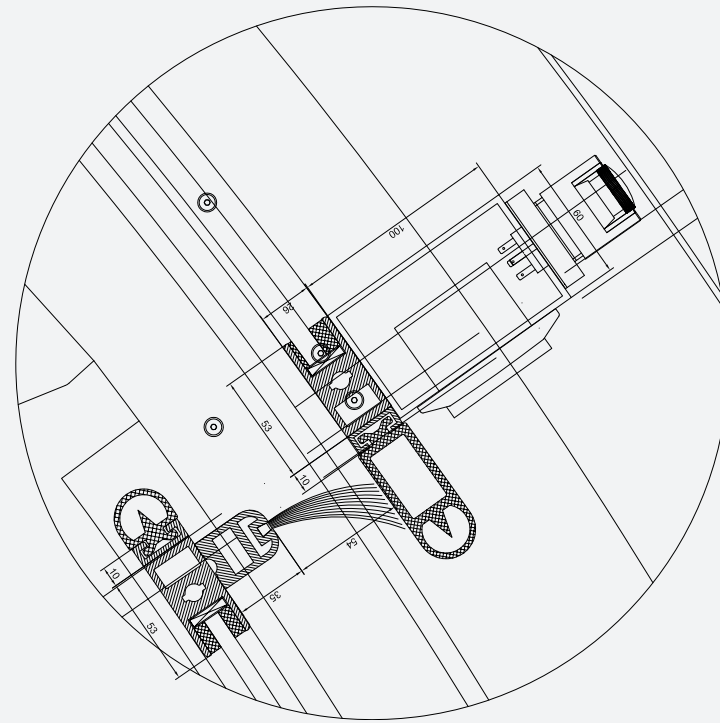

DISTINCTIVE FEATURES

Fully automatic revolving door with all-glass drum walls. Rotating middle centerpiece with internal automatic sliding door and integrated safety sliding leaves. Circular running LED light strip in the ceiling panels. All visible parts anodized.




Hörmann KG

Architects: Wannenmacher + Möller GmbH




REVOLVING

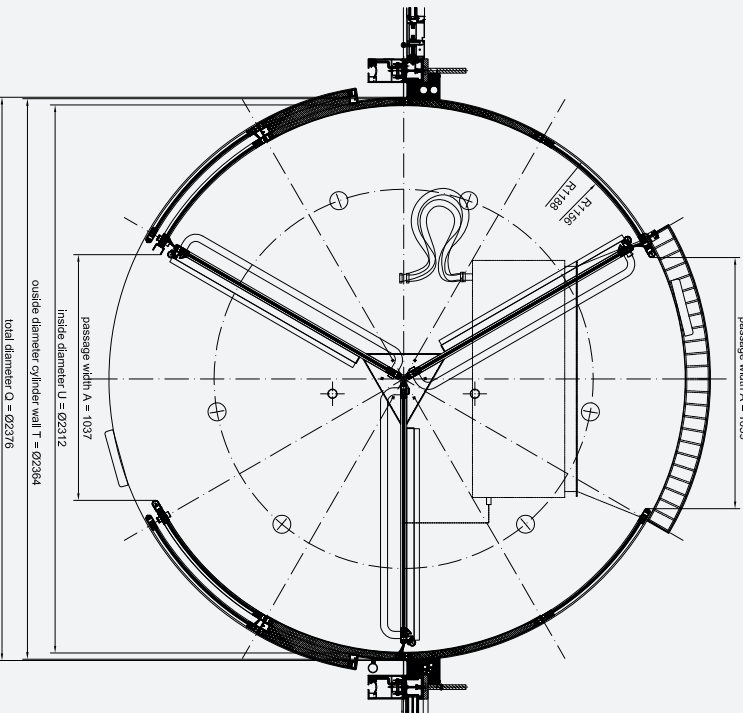

3-LEAF REVOLVING DOOR record K 31

Diameter: 2376 mm
Passage height: 3000 mm
Overall height: 4400 mm

Diameter and overall height variable.

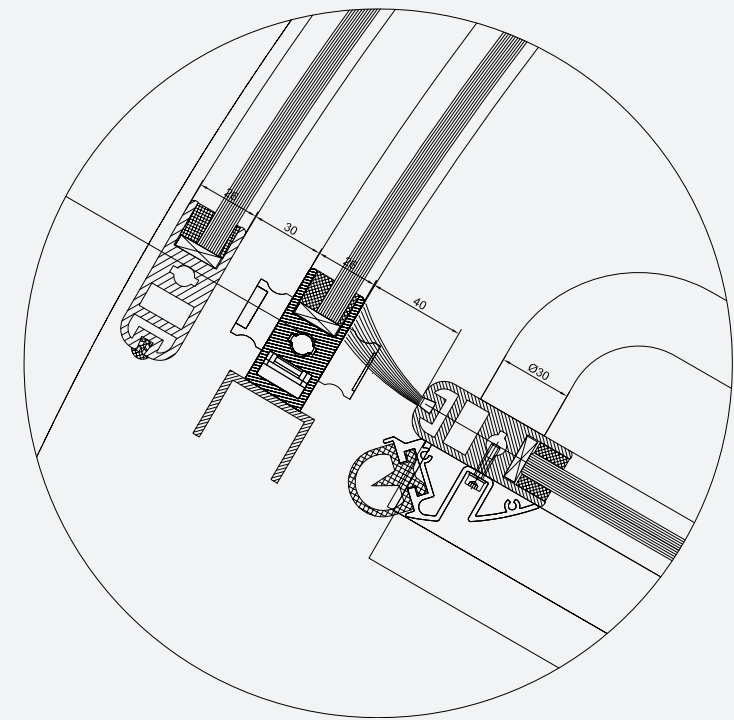


DISTINCTIVE FEATURES

Semi automatic revolving door with bespoke all-glass drum walls, integrated internal glass panel night lock door leaves. Illuminated signage integrated in pelmet, Perspex-backed, integrated air-curtain and all visible parts powder coated.




REVOLVING

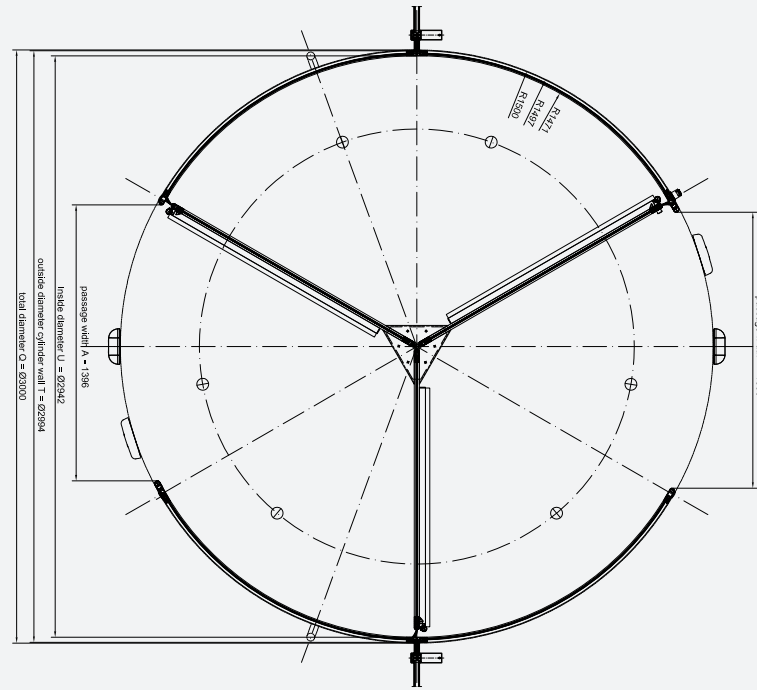

3-LEAF REVOLVING DOOR record K 32

Diameter: 3000 mm
Passage height: 2550 mm
Overall height: 2850 mm

Diameter and overall height variable.

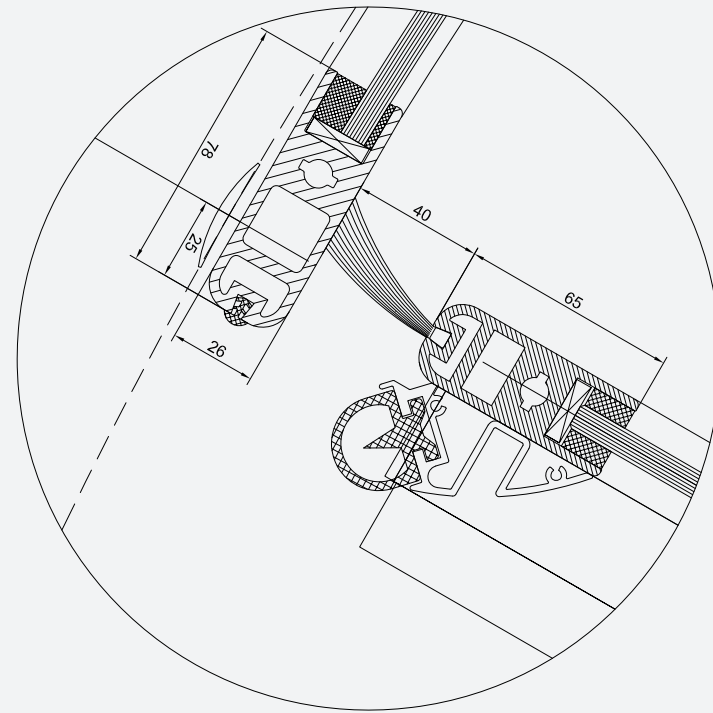

DISTINCTIVE FEATURES


Fully automatic revolving door with all-glass drum walls. All visible parts RAL powder coated.



CARRÉ LAFAYETTE
Architects: Enet Dolowy Architecture




REVOLVING

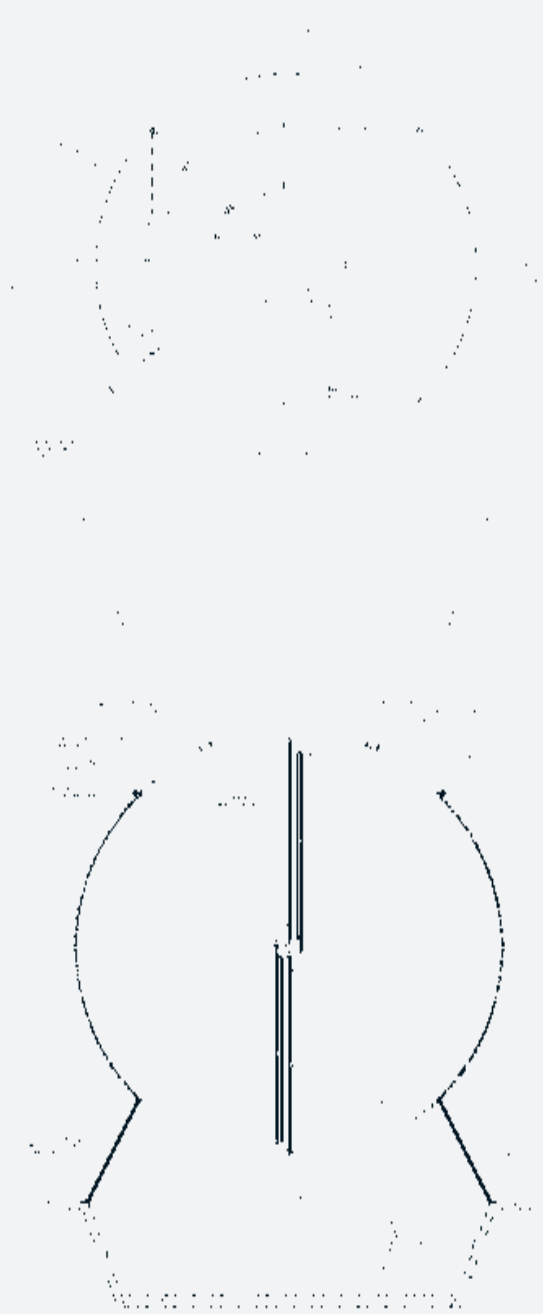

UNDERFLOOR 4-LEAF REVOLVING DOOR DOOR TYPE K41

Diameter: 4200 mm
Passage height: 4100 mm
Installation depth: 950 mm

Diameter and overall height variable. Underfloor drive units require a minimum depth of 350 mm.

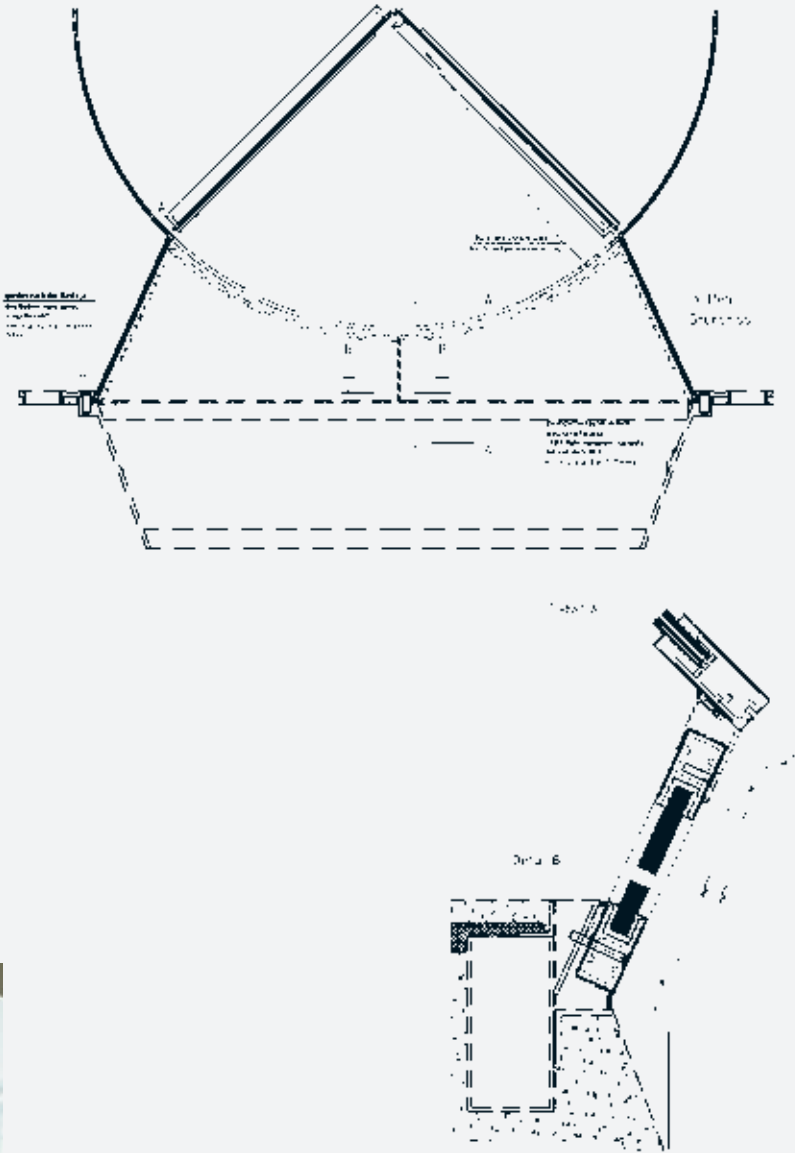

DISTINCTIVE FEATURES

Fully automatic revolving door with concealed underfloor drive unit and offset canopy featuring stainless steel louvres. Underside of canopy in frosted glass. Air curtain integrated in the floor. All visible parts in stainless steel finish.






REVOLVING

UNDERFLOOR 4-LEAF REVOLVING DOOR DOOR TYPE K 41

Diameter: 2500 mm
Passage height: 4000 mm
Installation depth: 400 mm



Diameter and overall height variable. Underfloor drive units require a minimum depth of 350 mm.

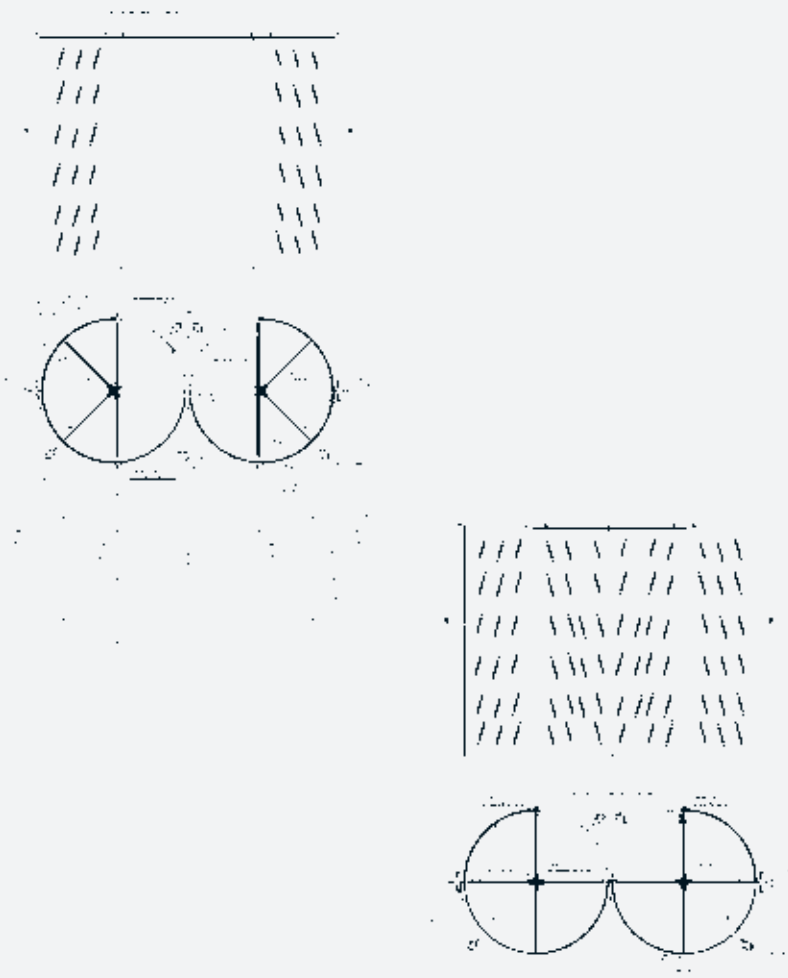

DISTINCTIVE FEATURES

Fully automatic all-glass VITRO revolving door with concealed under-floor drive unit. Bespoke solution with collapsible turnstile leaves and movable drum walls. All visible parts RAL powder coated.



REVOLVING

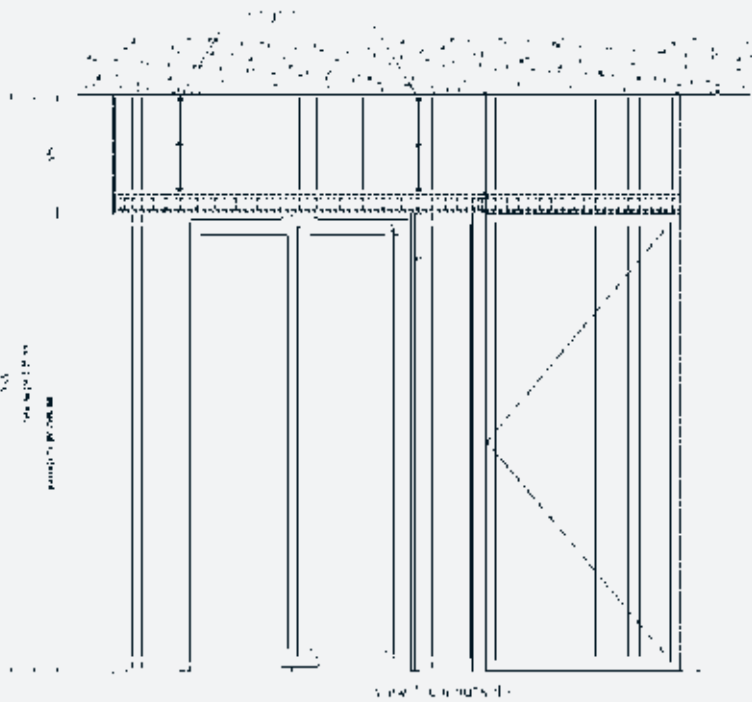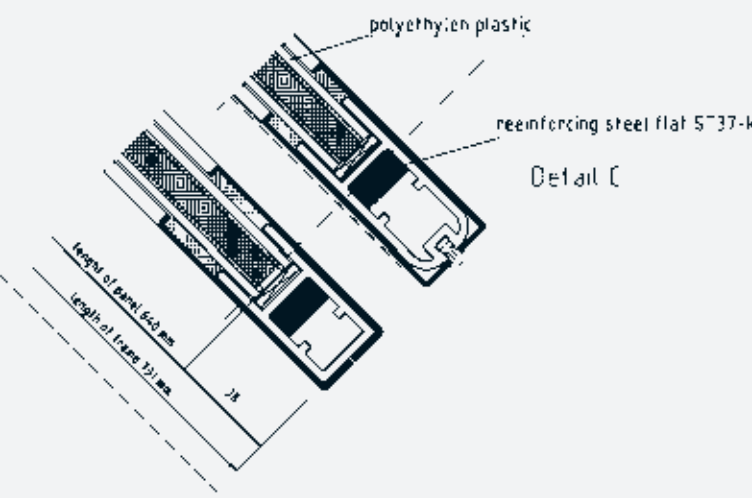

UNDERFLOOR 4-LEAF REVOLVING DOOR DOOR TYPE K 41

Diameter: 1800 mm
Passage height: 2500 mm
Overall height: 3200 mm

Diameter and overall height variable. Underfloor drive units require a minimum depth of 350 mm.

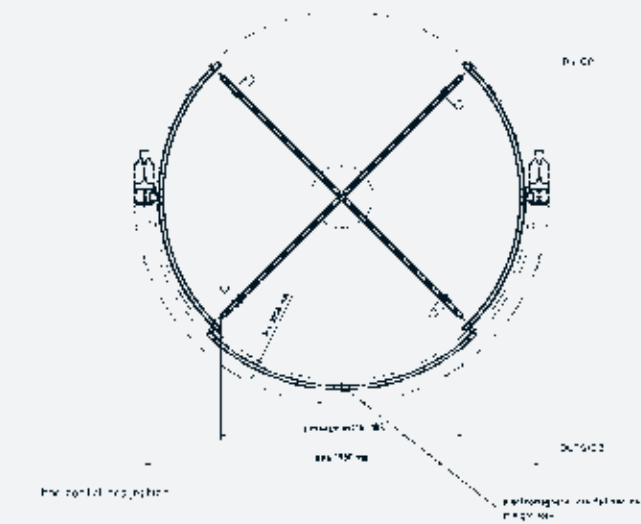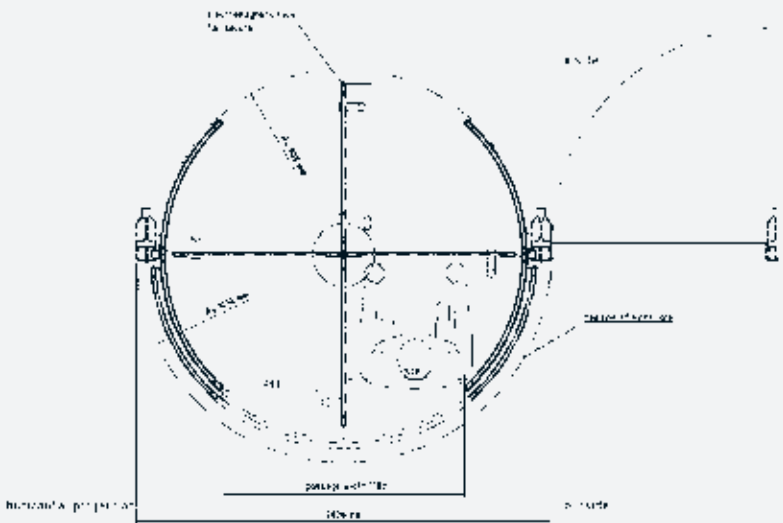


DISTINCTIVE FEATURES

Semi-automatic revolving door with anti-tailgating access control facility. Glass drum walls. Night lock door leaves integrated externally. All visible parts in matt bronze.





Diameter: 2800 mm
Passage height: 3800 mm
Installation depth: 300 mm

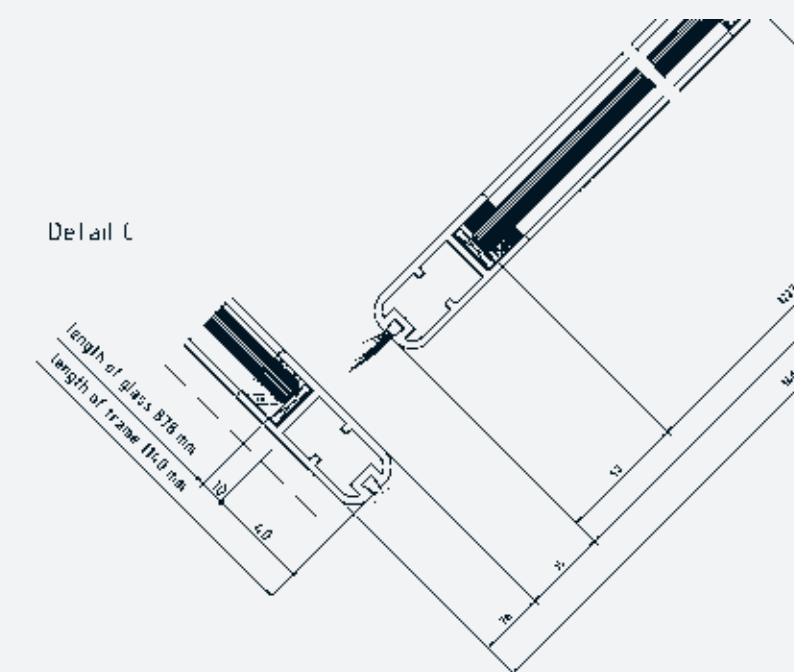[illegible]

Fully automatic all-glass VITRO revolving door with concealed underfloor drive unit. All visible parts anodised.




CURVED SLIDER

Sliding doors for
any conceivable radius



CURVED SLIDER

Sliding doors for any conceivable radius

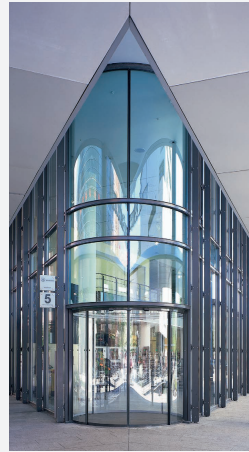

With their automatic Radial sliding door systems BLASI offers a comprehensive programme featuring bi-parting curved sliding doors, bi-parting drum sliding doors with small or large passage widths as well as oval sliding doors.


BLASI radial door systems have been perfected technically and from a quality point of view and can accommodate diameters of up to 10 metres. They are equipped with barely audible drive mechanisms, which can be integrated in the ceiling or concealed under the finished floor. Concealed underfloor drive units in conjunction with all-glass Radial door systems offer a particularly light and transparent visual effect and are the preferred choice as far as glass facades are concerned.

Radial door systems afford complete freedom of choice: be it brass, chrome, stainless steel, any RAL colour or bespoke radius, the creative options are unlimited. Radius, diameter and overall height are variable. The minimum installation depth requirement for a concealed underfloor drive unit is 220 mm.

Radius, diameter and total height variable. Underfloor execution requires minimum 220 mm installation depth.



Radial curved sliding doors



Radial drum sliding doors



Radial oval sliding doors





CURVED SLIDER

UNDERFLOOR BI-PARTING CURVED SLIDING DOOR
DOOR TYPE R 61 SU

Passage width: 4200 mm
Passage height: 4000 mm
Installation depth: 300 mm

Curvature, passage width and overall height are variable. Under-floor drive units require a minimum depth of 220 mm.

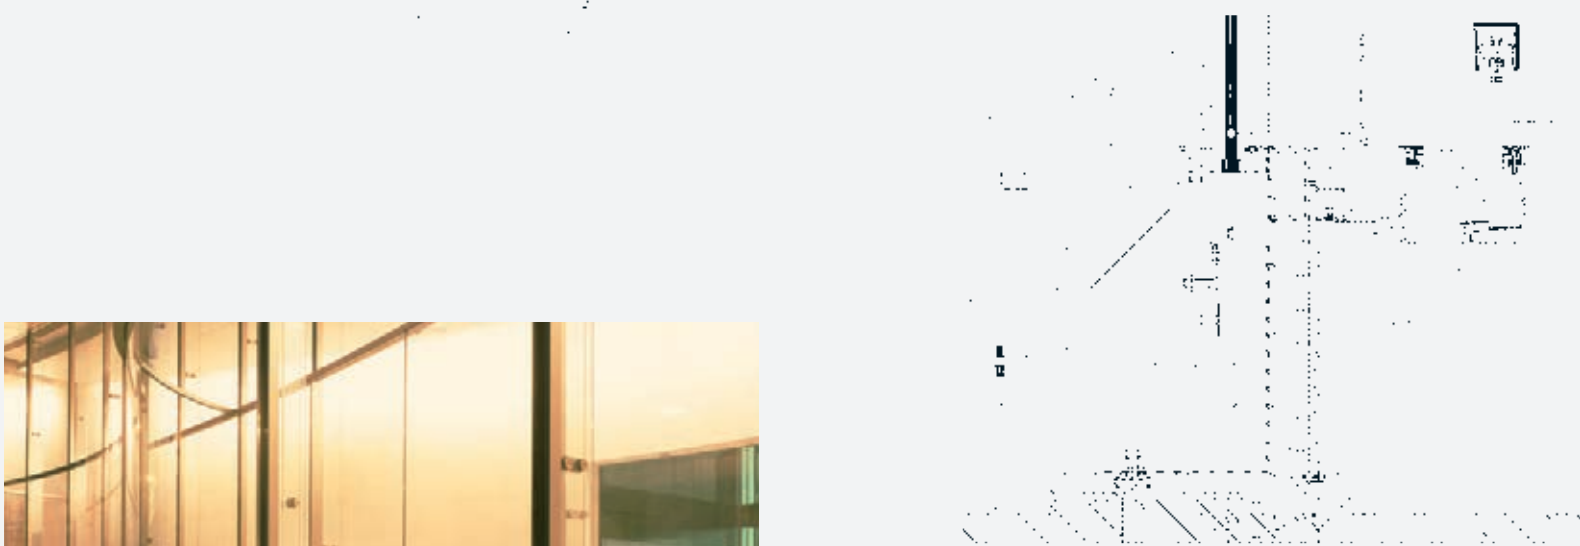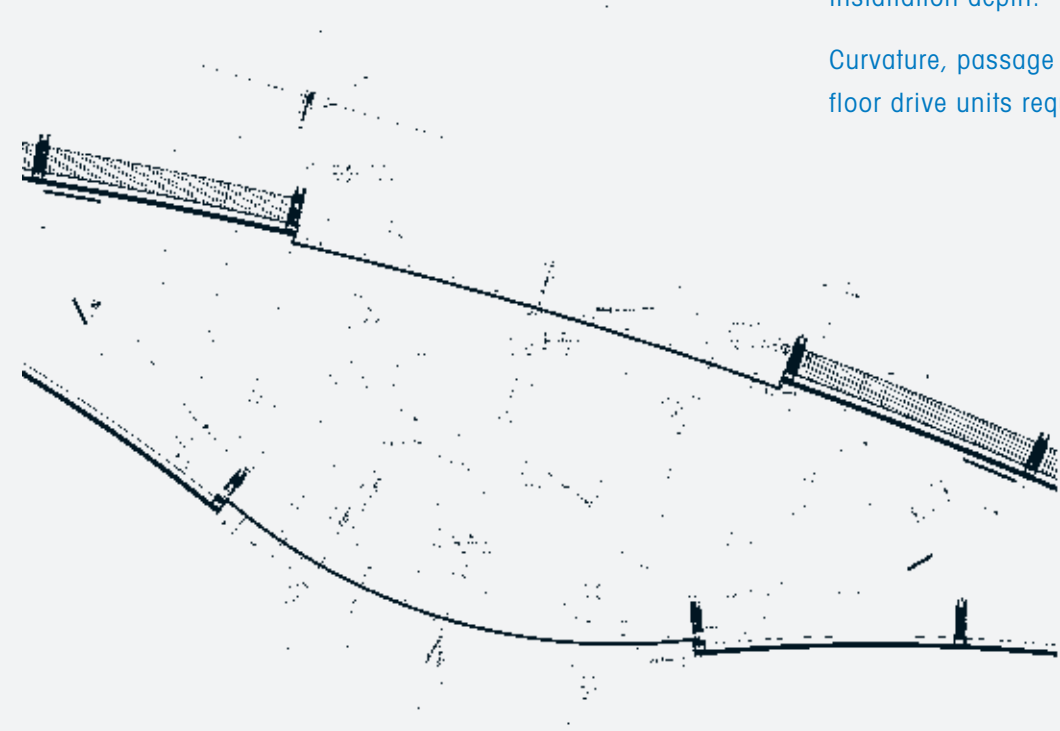

DISTINCTIVE FEATURES

All-glass automatic curved sliding door with concealed under-floor drive unit and minimal profiles. Activated by DownTec movement sensors integrated in the floor. All visible parts in satin stainless steel finish.








CURVED SLIDER

BI-PARTING DRUM SLIDING DOOR DOOR TYPE R 61

Diameter: 2500 mm
Passage height: 3200 mm
Overall height: 3500 mm

Curvature, passage width and overall height are variable.

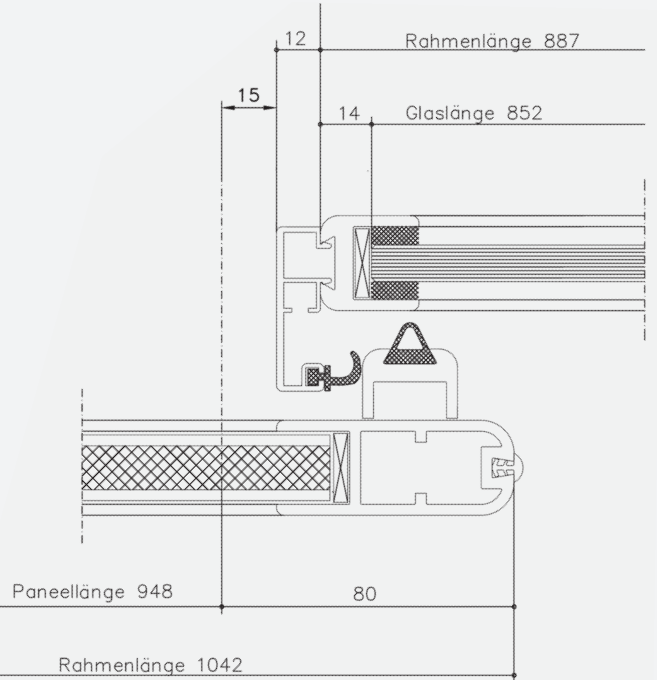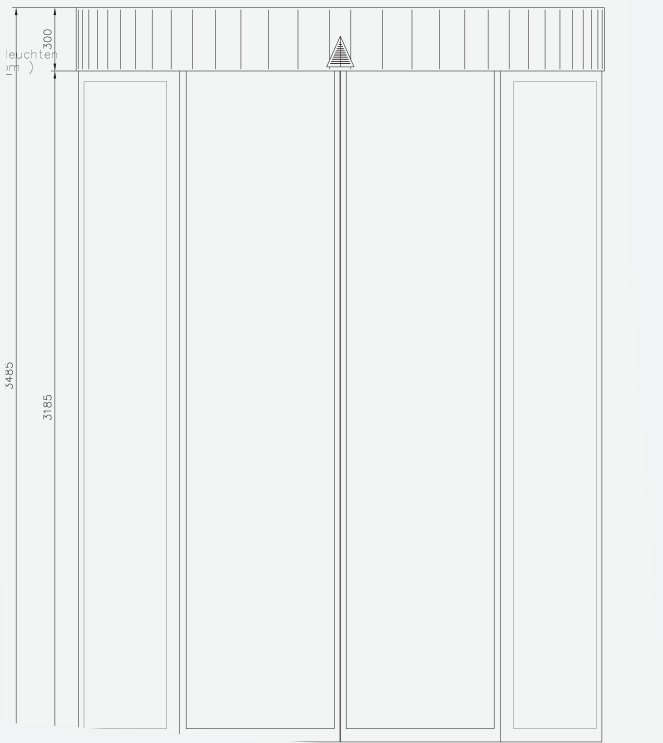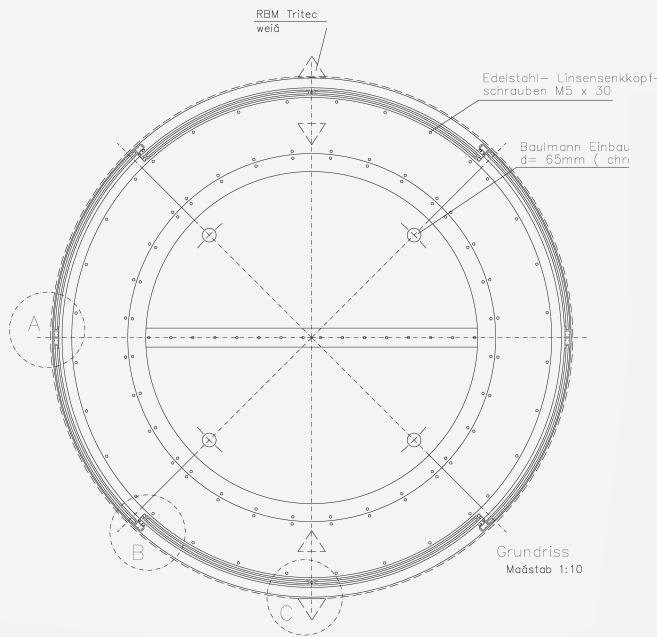

DISTINCTIVE FEATURES



Fully automatic curved sliding door with full glass drum walls.
All visible parts anodised.

CURVED SLIDER

UNDERFLOOR BI-PARTING DRUM SLIDING DOOR DOOR TYPE R 61 SU

Diameter: 2900 mm
Passage height: 2650 mm
Installation depth: 300 mm

Curvature, passage width and overall height are variable. Under-floor drive units require a minimum depth of 220 mm.

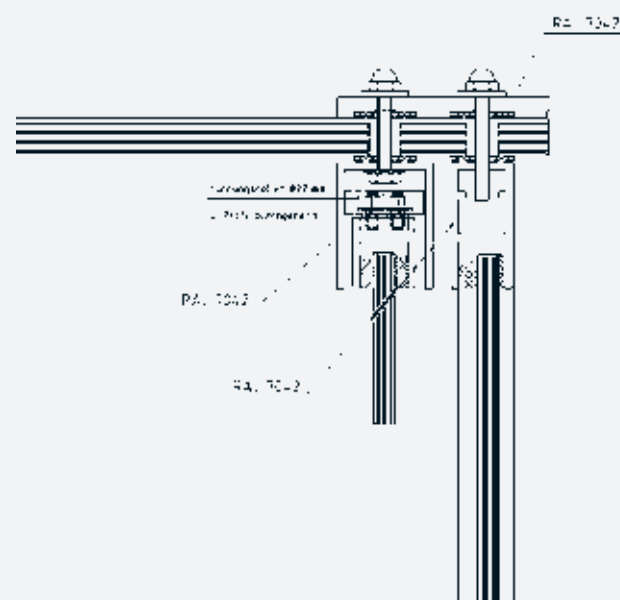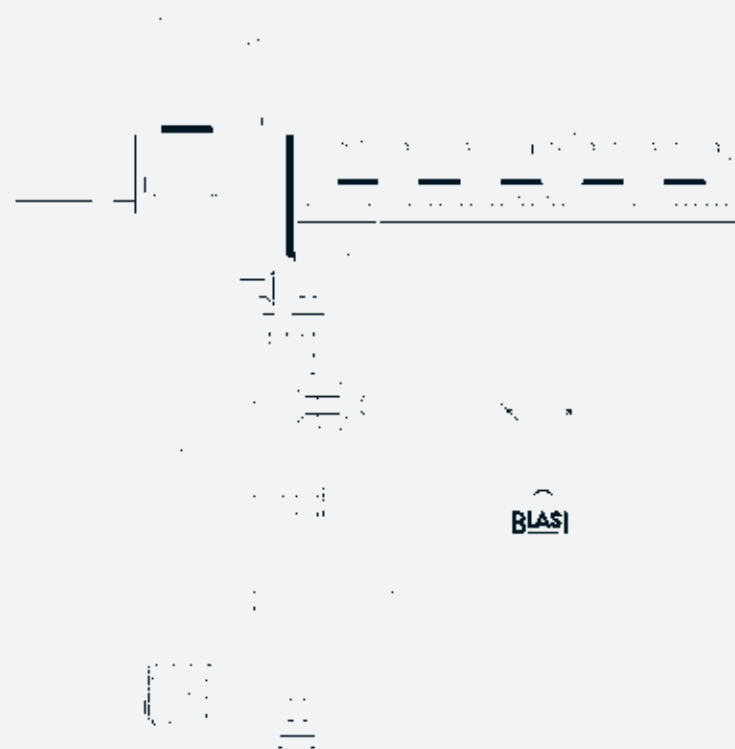

DISTINCTIVE FEATURES

Automatic bi-parting drum sliding door with concealed under-floor drive unit and all-glass drum walls. Integrated sluice unction. All visible parts RAL powder coated.




CURVED SLIDER

BI-PARTING CURVED SLIDING DOOR
DOOR TYPE R 61

Passage width: 1700 mm
Passage height: 3100 mm
Overall height: 3330 mm

Curvature, passage width and overall height are variable.

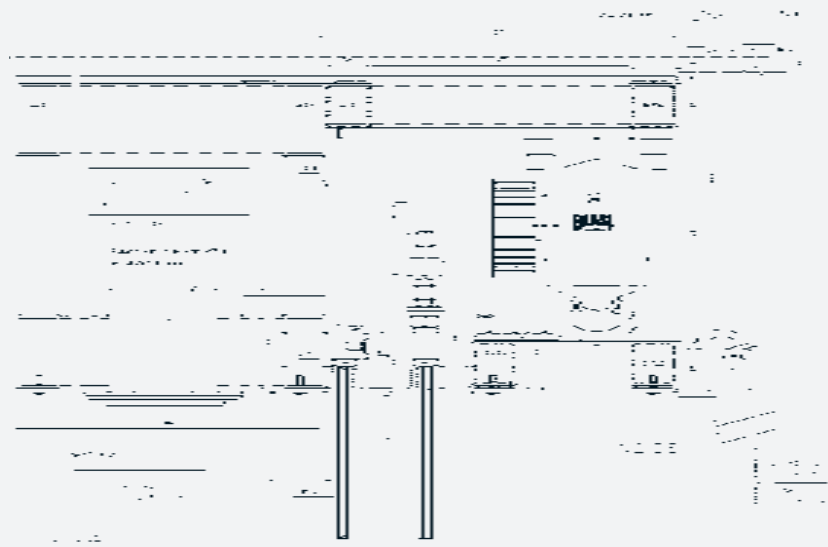

DISTINCTIVE FEATURES

All-glass automatic curved bi-parting sliding door. All visible parts in bespoke anodized finish.






CURVED SLIDER

UNDERFLOOR BI-PARTING DRUM SLIDING DOOR DOOR TYPE R 61 SU

Passage width: 1800 mm
Passage height: 4000 mm
Installation depth: 350 mm

Curvature, passage width and overall height are variable. Under-floor drive units require a minimum depth of 220 mm.

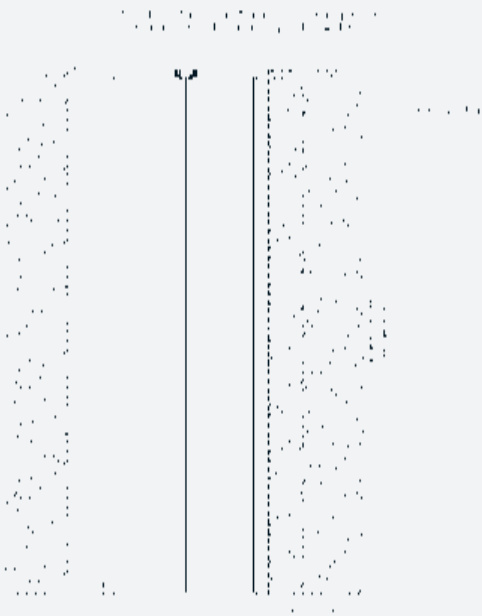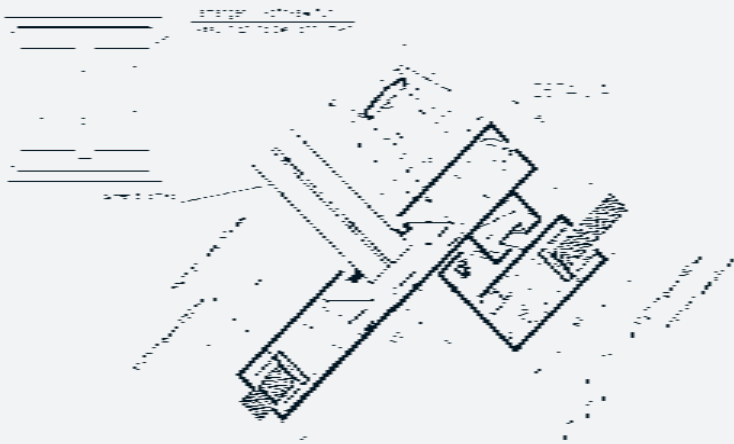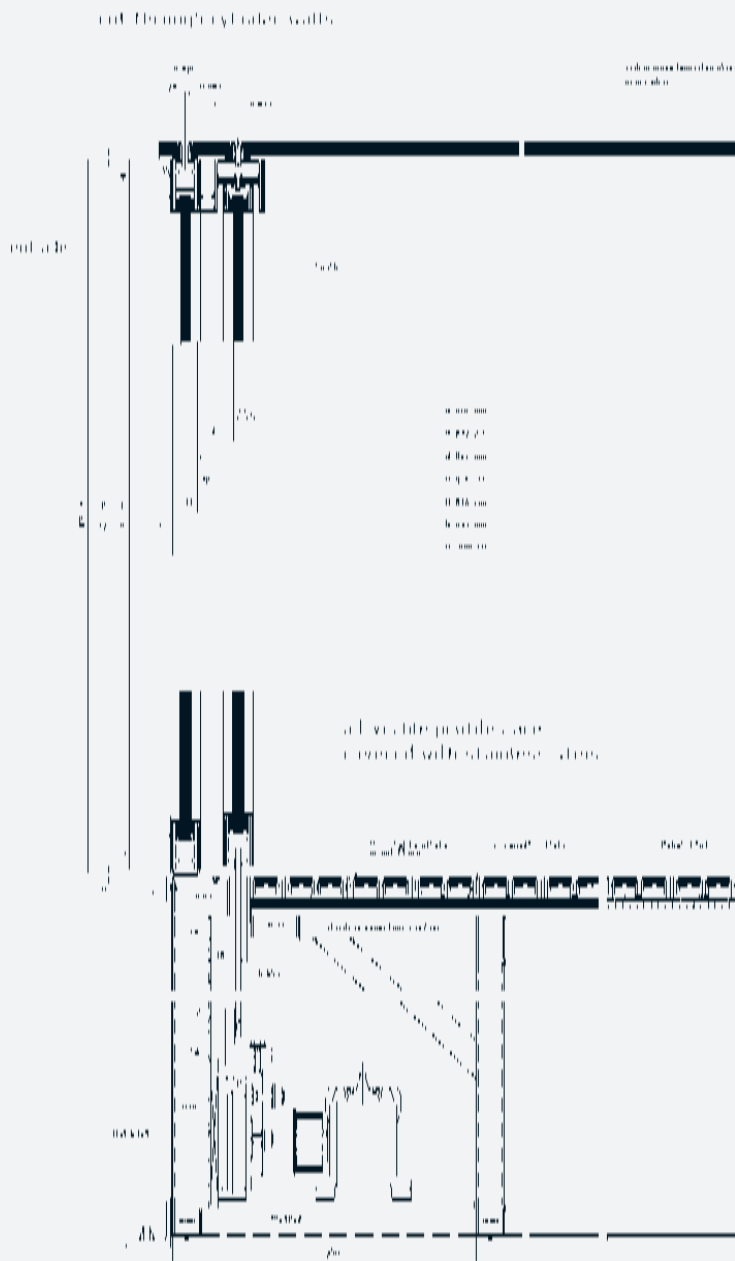

DISTINCTIVE FEATURES

All-glass automatic curved drum sliding door with concealed underfloor drive unit. All visible parts in bead blasted stainless steel.





CURVED SLIDER

UNDERFLOOR BI-PARTING DRUM SLIDING DOOR DOOR TYPE R 61 SU

Passage width: 1600 mm
Passage height: 2700 mm
Overall height: 275 mm

Curvature, passage width and overall height are variable. Under-floor drive units require a minimum depth of 220 mm.

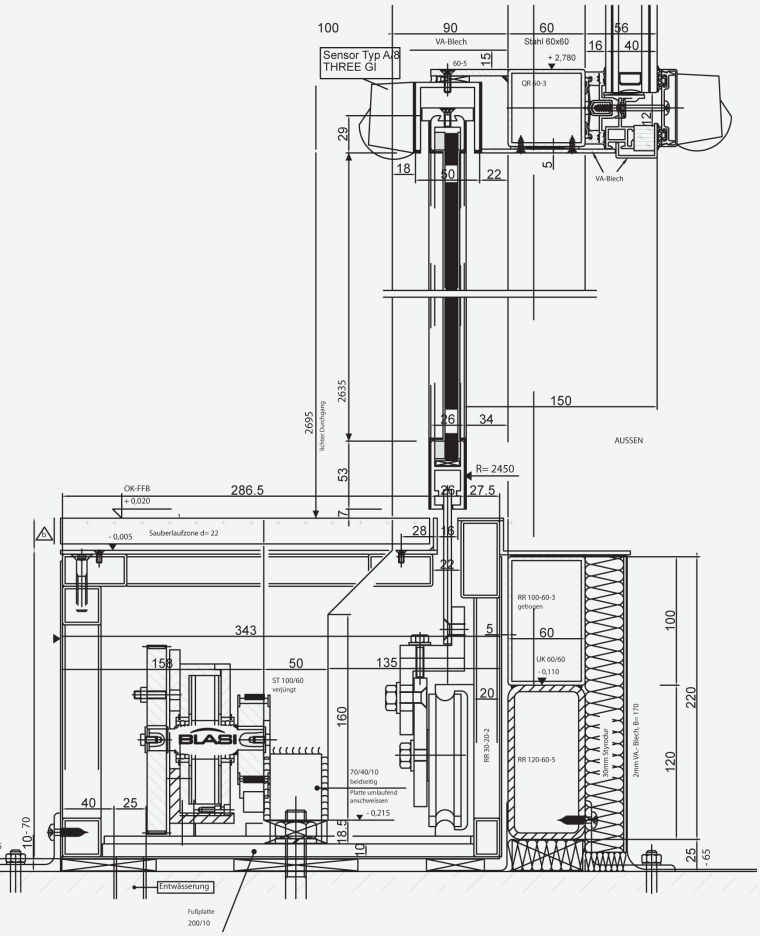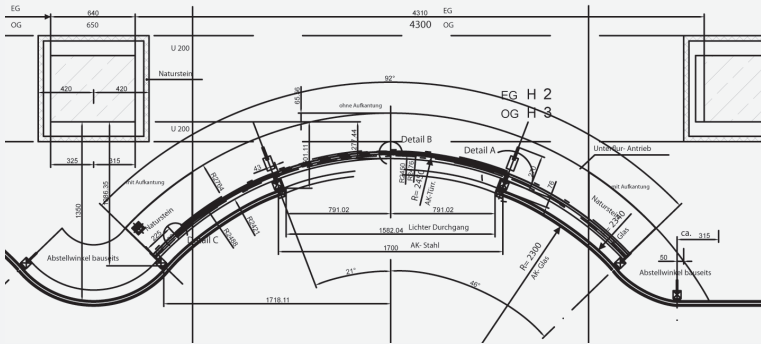

DISTINCTIVE FEATURES

All-glass automatic curved bi-parting sliding door. All visible parts in bespoke anodized finish.




CURVED SLIDER

BI-PARTING DRUM SLIDING DOOR DOOR TYPE R 61

Diameter: 3300 mm
Passage height: 4100 mm
Overall height: 5300 mm

Curvature, diameter and overall height are variable.

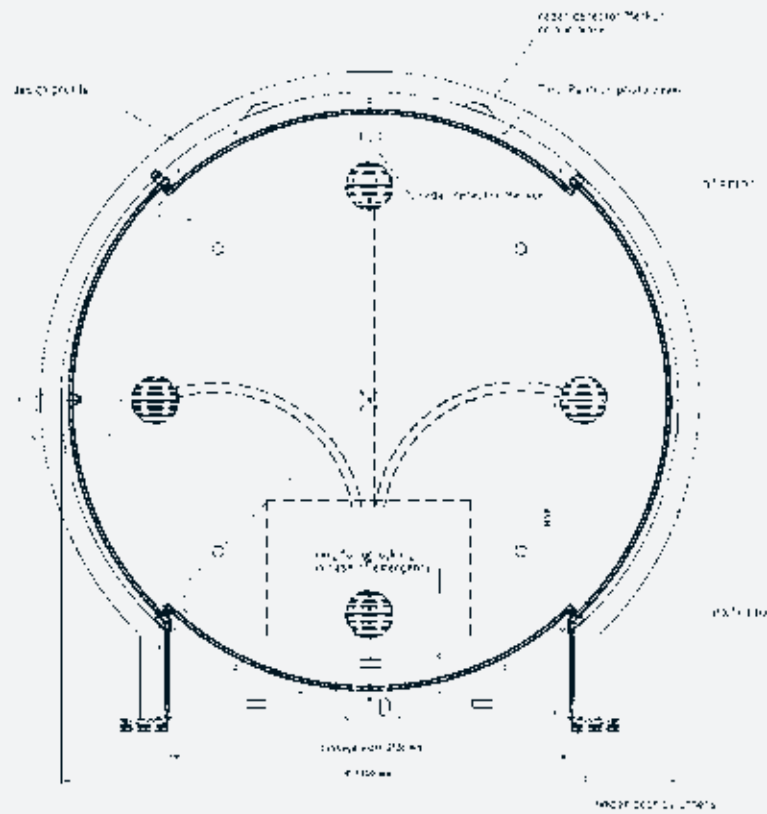

DISTINCTIVE FEATURES

All-glass automatic bi-parting drum sliding door with integrated air curtain. Canopy with bespoke moulded surround. All visible part coated in a bespoke bronze finish.





CURVED SLIDER



UNDERFLOOR BI-PARTING CURVED SLIDING DOOR DOOR TYPE R 61 SU

Diameter: 2500 mm
Passage height: 3600 mm
Installation depth: 500 mm

Curvature, passage width and overall height are variable. Under-floor drive units require a minimum depth of 220 mm.

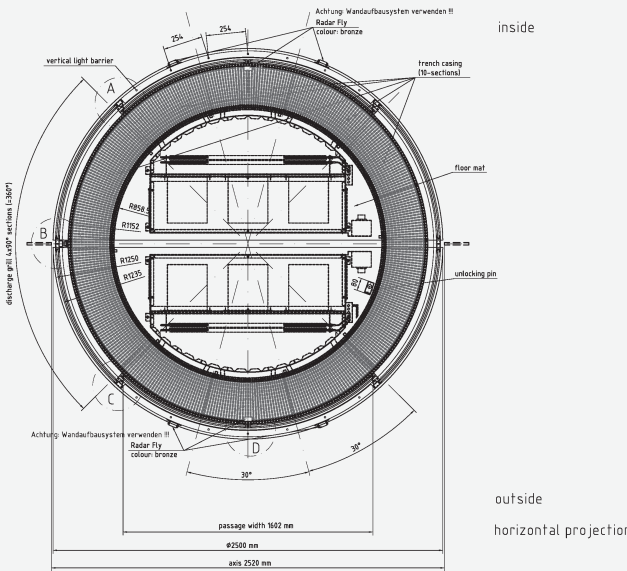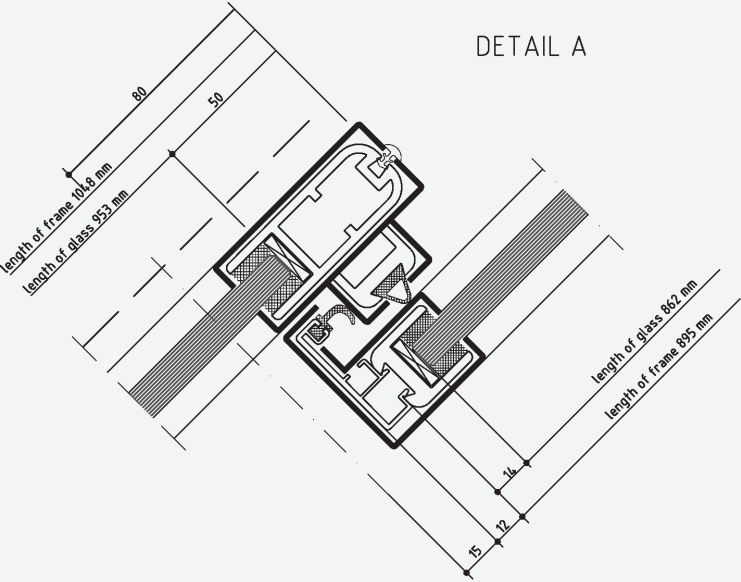

DISTINCTIVE FEATURES

All-glass automatic bi-parting curved sliding door with concealed underfloor drive unit. Concealed air curtain integrated in the floor. All visible parts bronze.






CURVED SLIDER


BI-PARTING DRUM SLIDING DOOR
DOOR TYPE R 61

Diameter: 3000 mm
Passage height: 2150 mm
Overall height: 2400 mm

Curvature, passage width and overall height are variable.

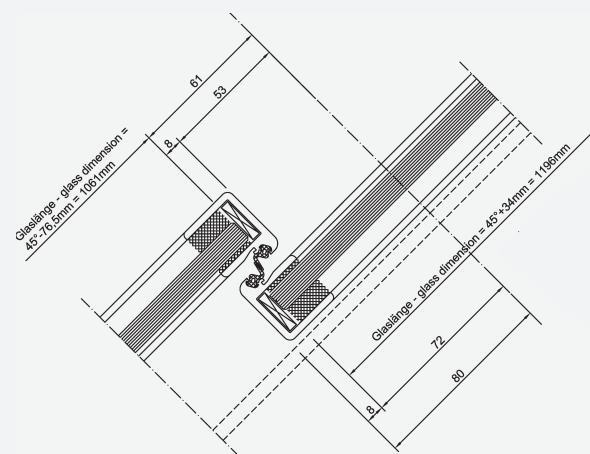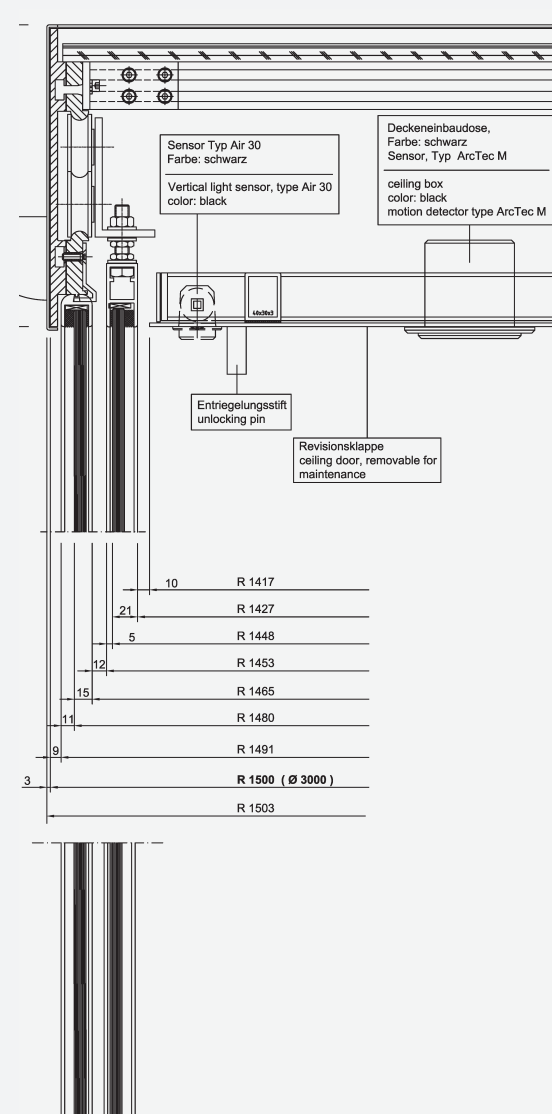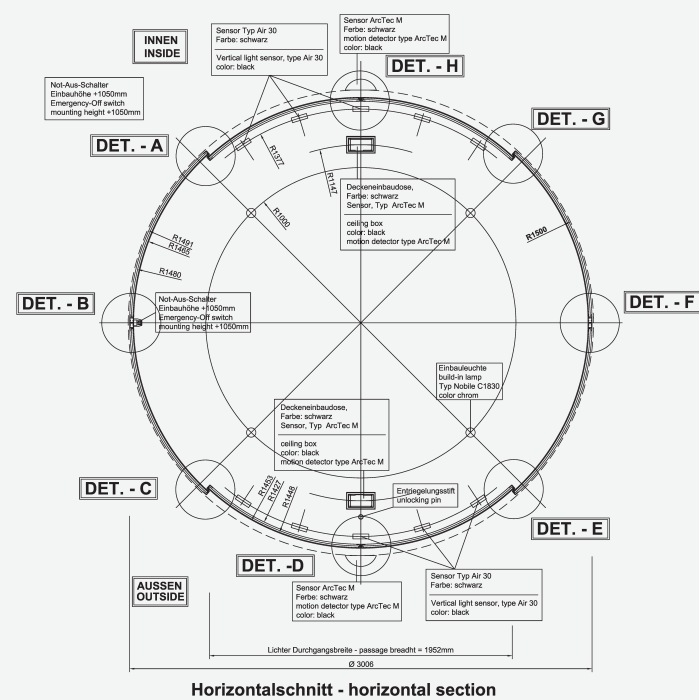


CURVED SLIDER

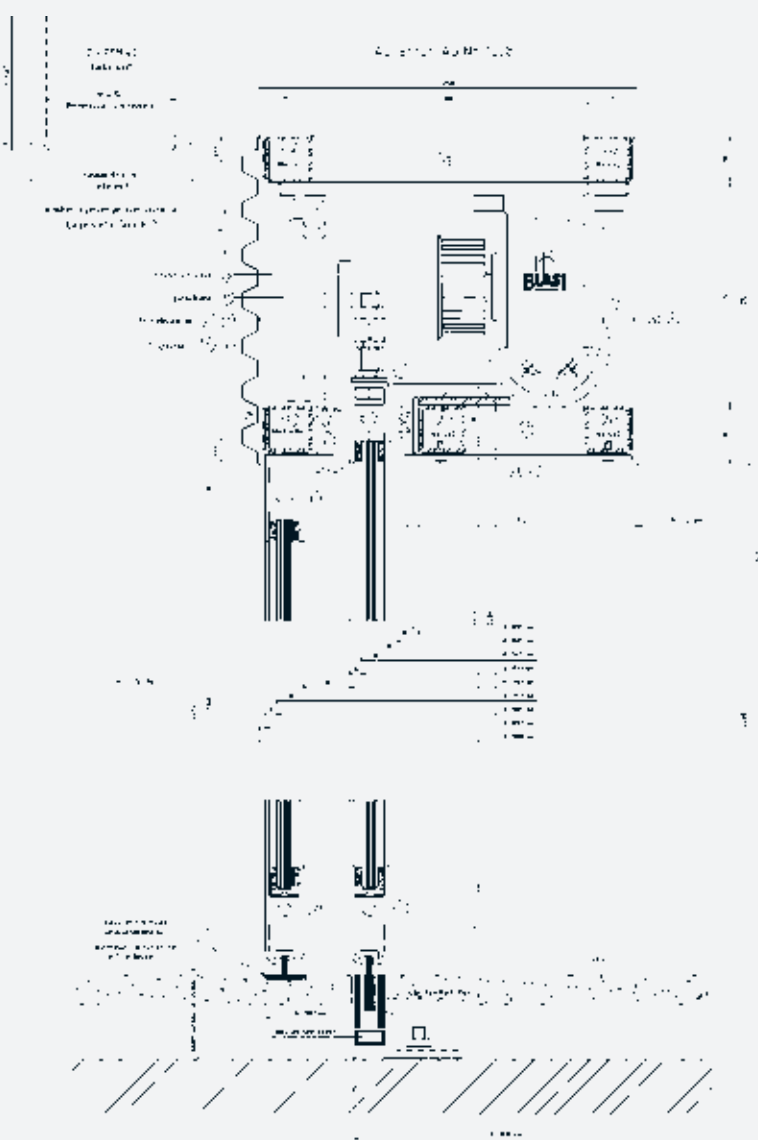

BI-PARTING CURVED SLIDING DOOR DOOR TYPE R 61

Passage width: 2000 mm
Passage height: 2300 mm
Overall height: 250 mm

Curvature, passage width and overall height are variable.


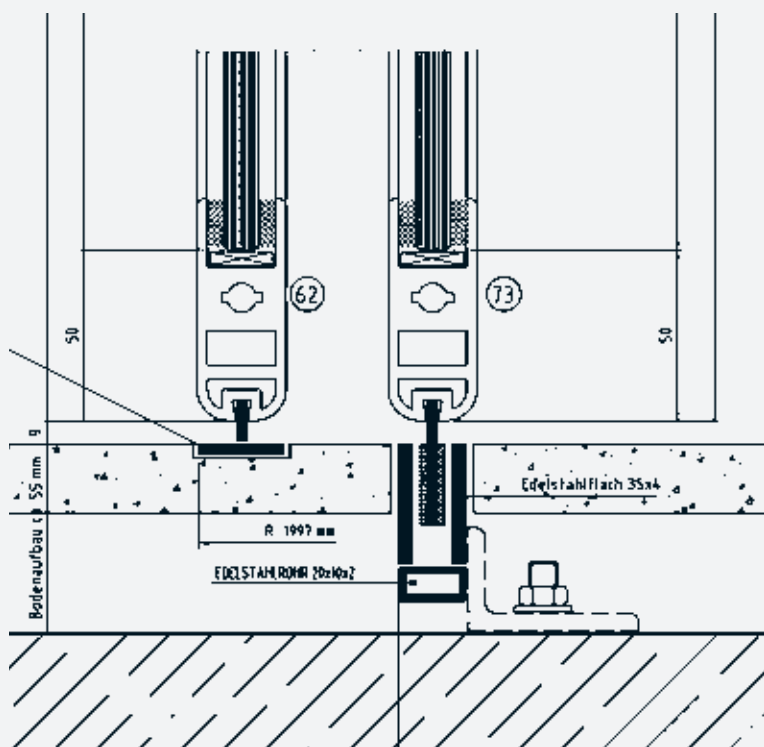


DISTINCTIVE FEATURES

All-glass automatic bi-parting curved sliding door. All visible parts in polished brass finish.



CURVED SLIDER

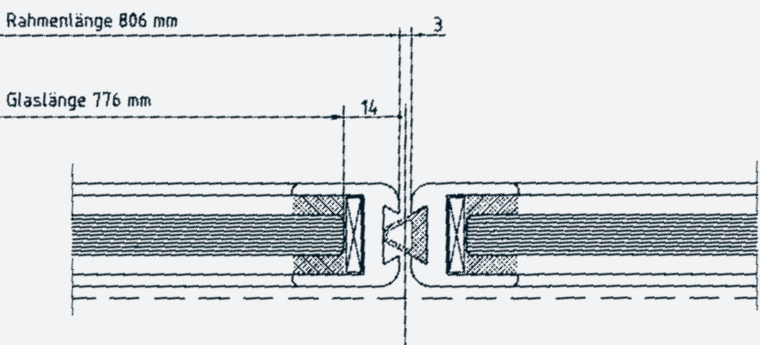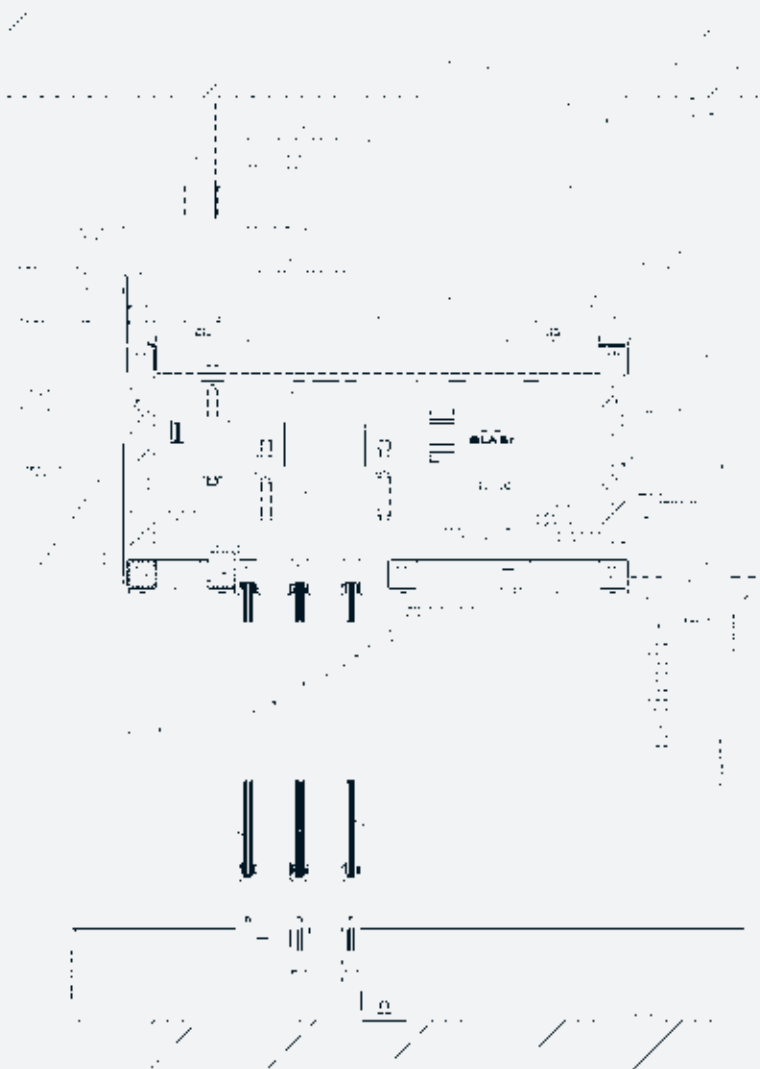

4-LEAF CURVED TELESCOPIC SLIDING DOOR DOOR TYPE R 61

Passage width: 3900 mm
Passage height: 2750 mm
Overall height: 3000 mm

Curvature, passage width and overall height are variable.

DISTINCTIVE FEATURES

All-glass curved telescopic automatic sliding door. All visible parts in brushed stainless steel.







CURVED SLIDER

UNDERFLOOR BI-PARTING CURVED SLIDING DOOR DOOR TYPE R 61 SU

Passage width:	1300 mm
Installation depth:	2300 mm
Installation depth:	150 mm (special dimension)

Curvature, passage width and overall height are variable. Under-floor drive units require a minimum depth of 220 mm.

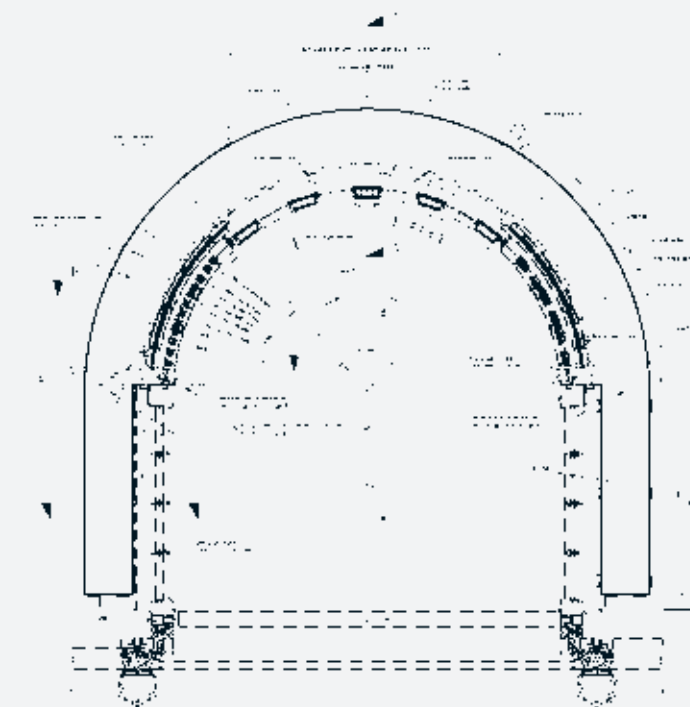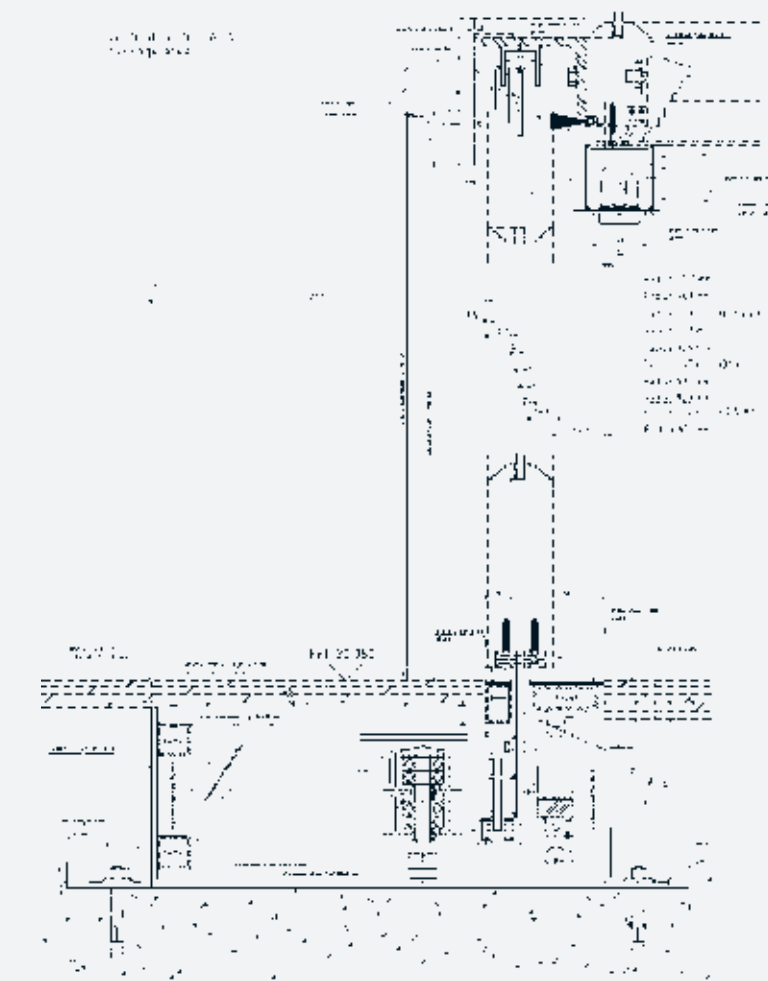

DISTINCTIVE FEATURES

Automatic bi-parting curved sliding door with concealed under-floor drive unit integrated into existing 125 year old louvre doors.

SLIDER

Flexible sliding door solutions



SLIDER

BI-PARTING SLIDING DOOR


DOOR TYPE S 16 Z

Passage width: 2200 mm

Passage height: 2150 mm

Overall height: 2330 mm

Passage width and passage height are variable.

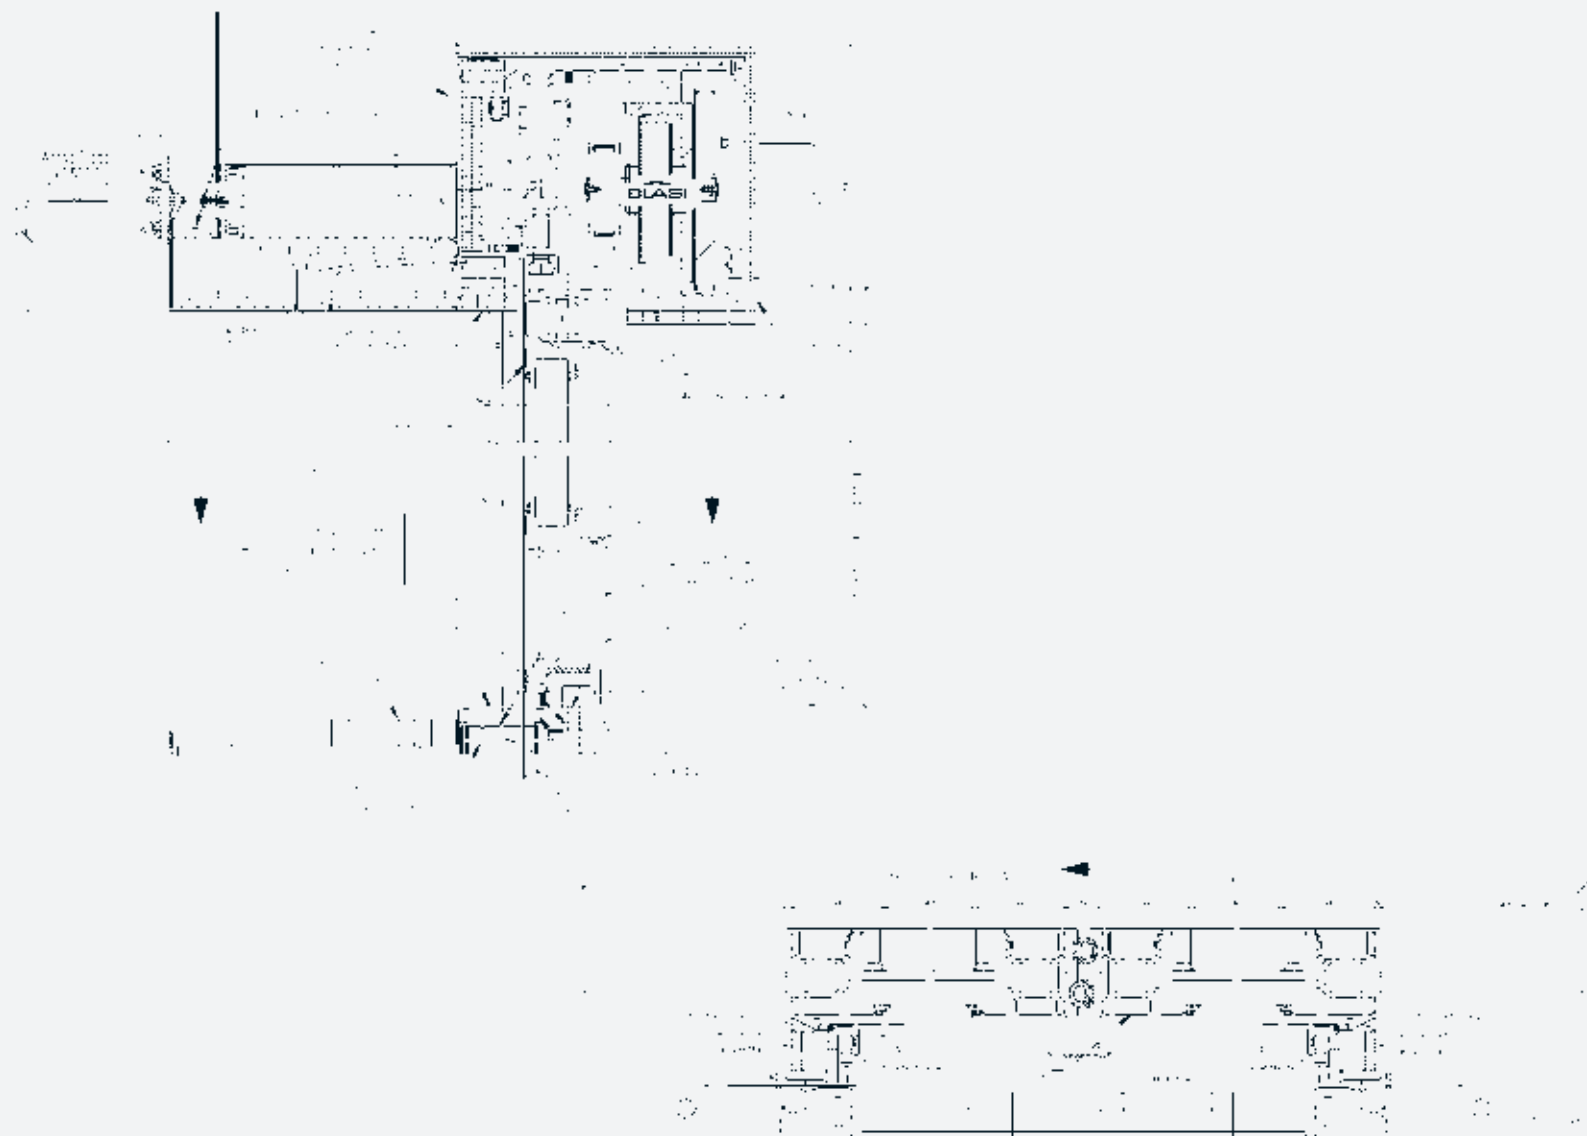


DISTINCTIVE FEATURES

Automatic sliding door system equipped with customized profiles and framed acoustic insulation glazing. All visible parts in customised lacquer.



SLIDER

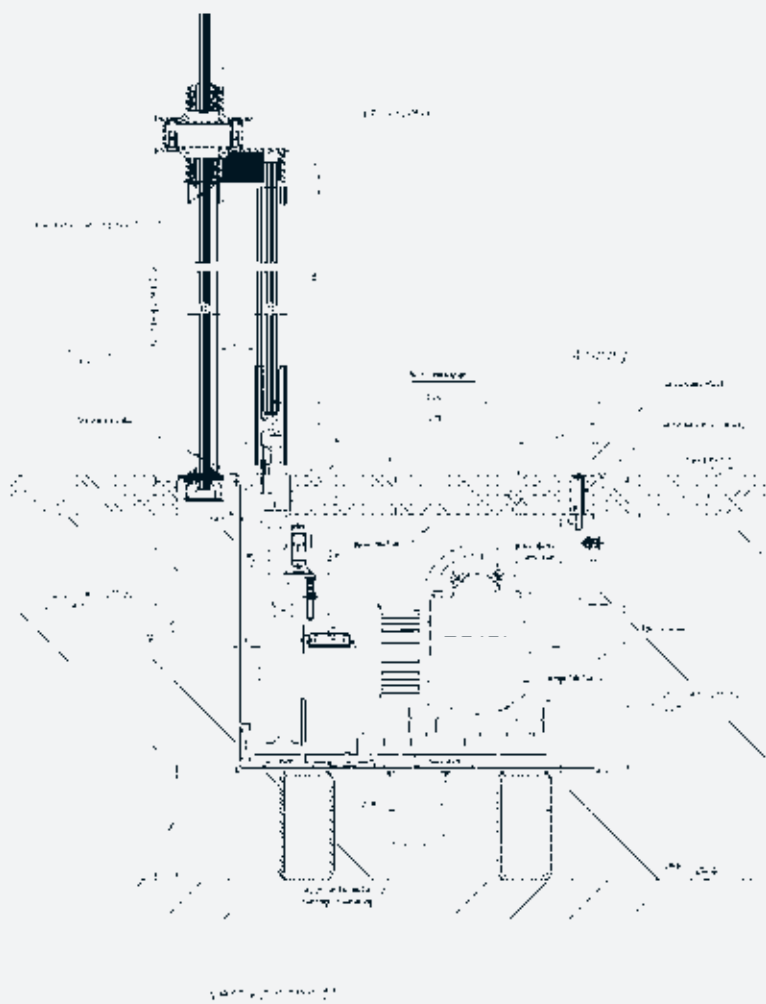

UNDERFLOOR BI-PARTING SLIDING DOOR
DOOR TYPE S 16 SU

Passage width: 1400 mm
Passage height: 2750 mm
Installation depth: 300 mm

Passage width and passage height are variable. Underfloor drive units require a minimum depth of 220 mm.

DISTINCTIVE FEATURES

All-glass automatic sliding door system with concealed under-floor drive unit. Integrated heater in the sliding area of the door leaves. All visible parts in bead blasted stainless steel.








SLIDER

UNDERFLOOR BI-PARTING SLIDING DOOR DOOR TYPE S 16 SU

Passage width: 2900 mm
Passage height: 4000 mm
Installation depth: 400 mm


Passage width and passage height are variable. Underfloor drive units require a minimum depth of 220 mm.

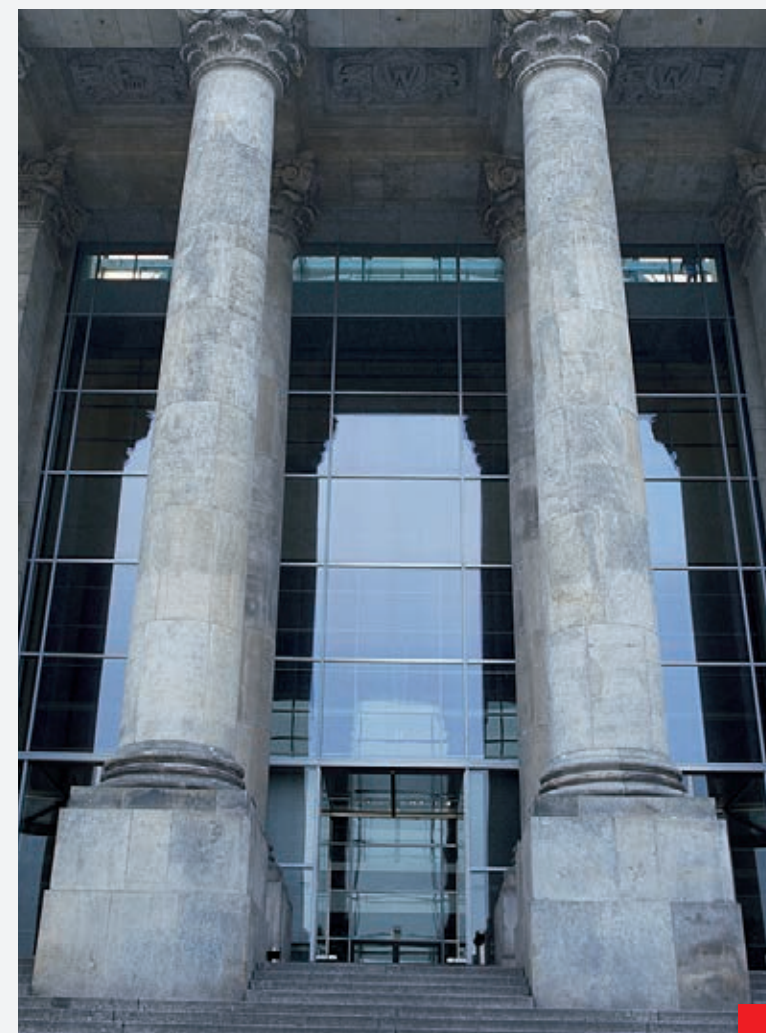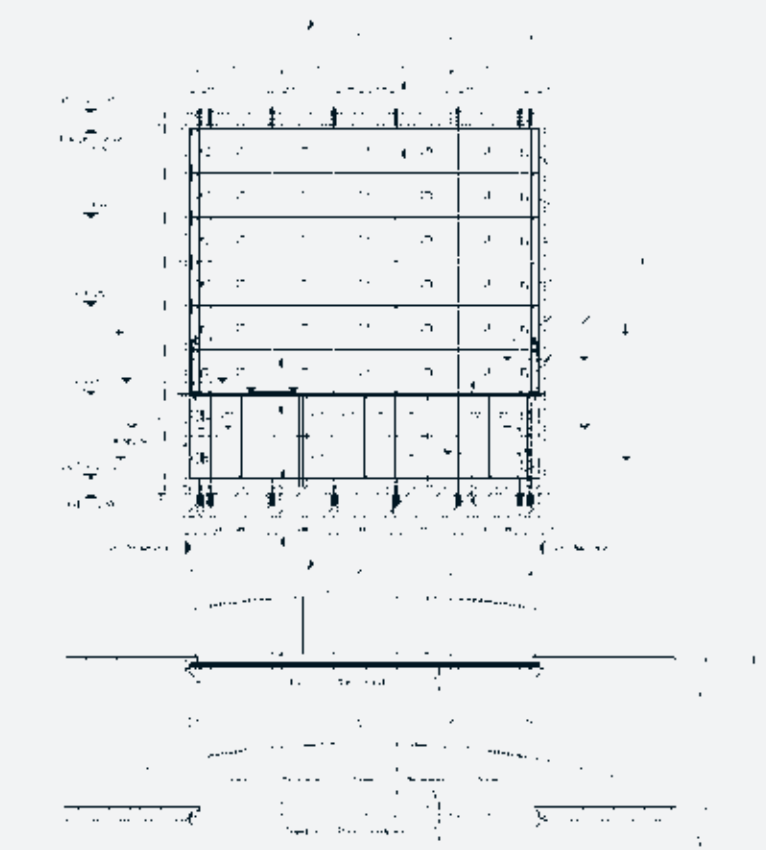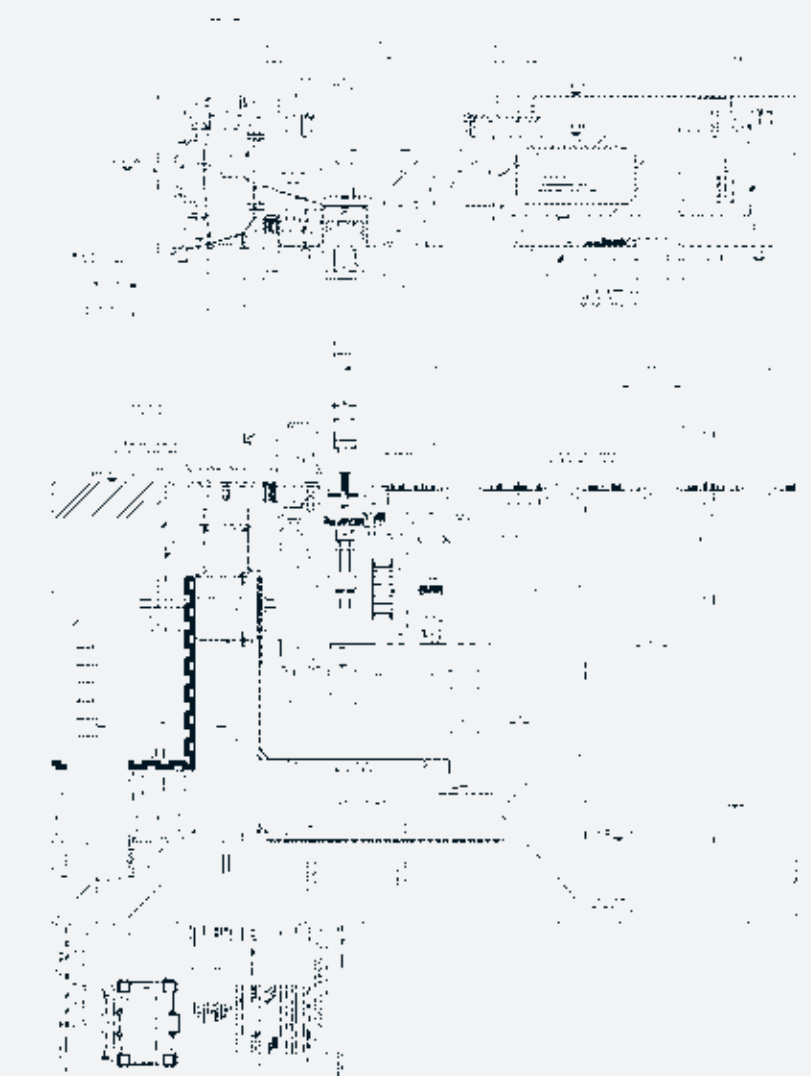

DISTINCTIVE FEATURES

Automatic sliding door system with concealed underfloor drive unit equipped with solid stainless steel profiles and bullet-proof glazing. Approved for use in emergency exits, resistance category ET2.


SLIDER

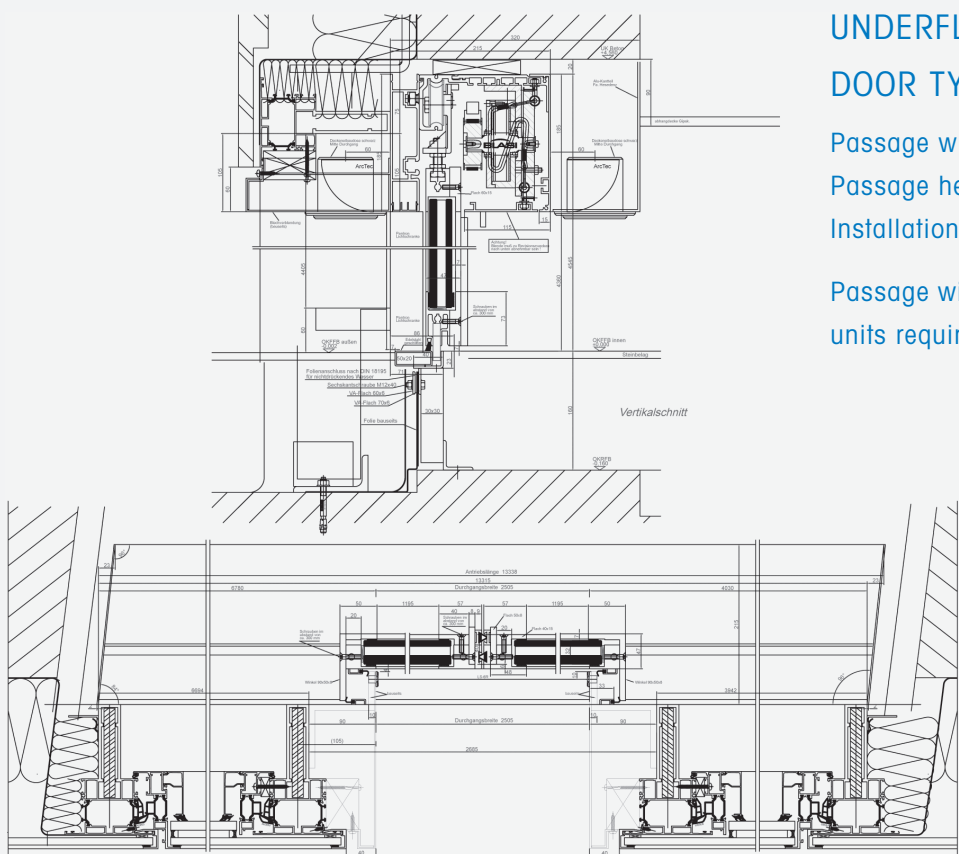

UNDERFLOOR BI-PARTING SLIDING DOOR DOOR TYPE S 16 SU

Passage width: 6300 mm
Passage height: 4200 mm
Installation depth: 280 mm

Passage width and passage height are variable. Underfloor drive units require a minimum depth of 220 mm.

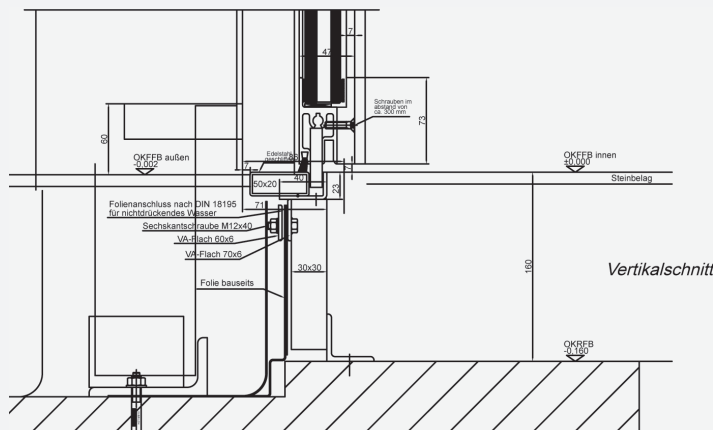

DISTINCTIVE FEATURES

Automatic in-ground sliding door with special glass leaves.
All visible frames treated in RAL powder coating.







SLIDER

UNDERFLOOR BI-PARTING SLIDING DOOR DOOR TYPE S 16 SU

Passage width: 1562 mm
Passage height: 4040 mm
Installation depth: 250 mm


Passage width and passage height are variable. Underfloor drive units require a minimum depth of 220 mm.

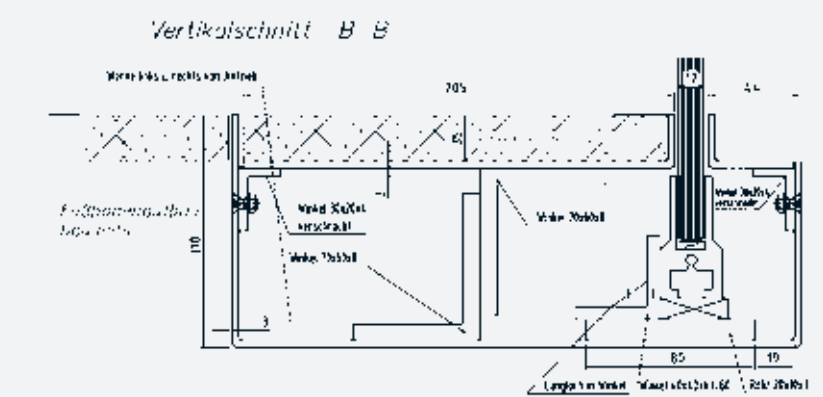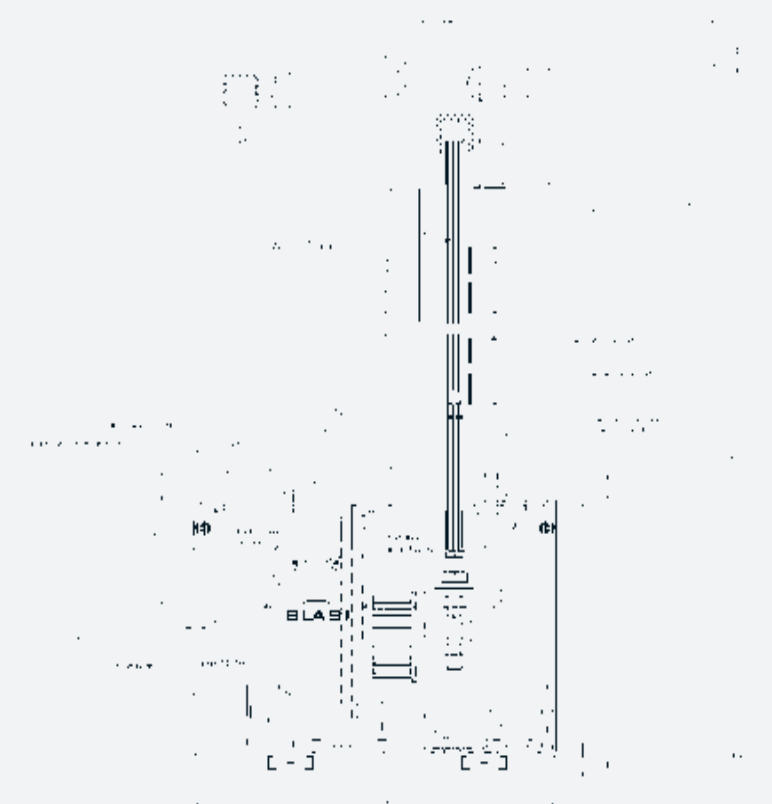

DISTINCTIVE FEATURES

All-glass automatic sliding door system with concealed under-floor drive unit. All visible parts powder coated in bespoke finish.

SLIDER

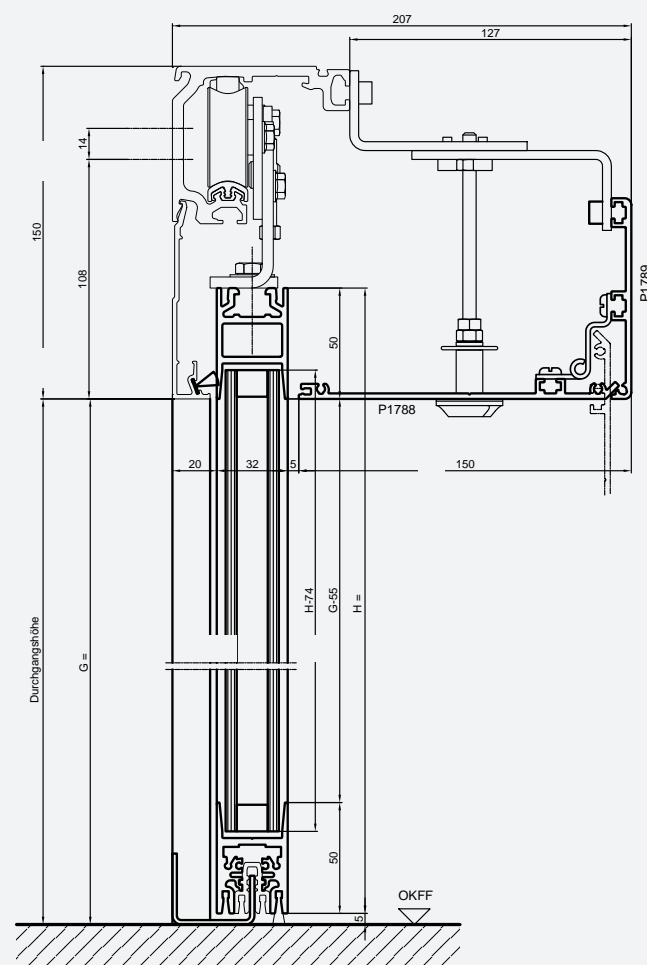


BI-PARTING SLIDING DOOR
DOOR TYPE STA 16

Passage width: 1500 mm

Passage height: 2300 mm

Overall height: 2450 mm

Passage width and passage height are variable.

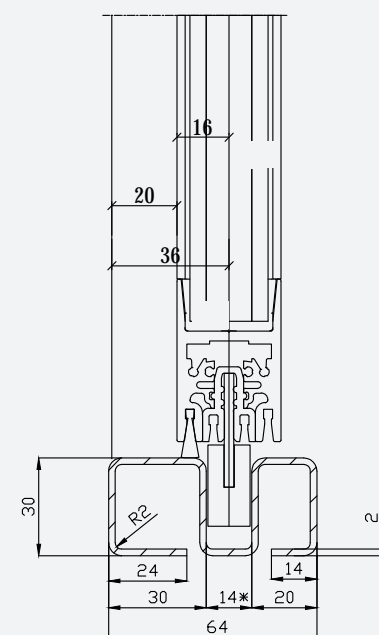

DISTINCTIVE FEATURES

Fully automatic sliding door in marine grade stainless steel – for usage in ship constructions.




SLIDER

4-LEAF TELESCOPIC SLIDING DOOR DOOR TYPE TST

Passage width: 4500 mm
Passage height: 3100 mm
Overall height: 3280 mm

Passage width and passage height are variable.

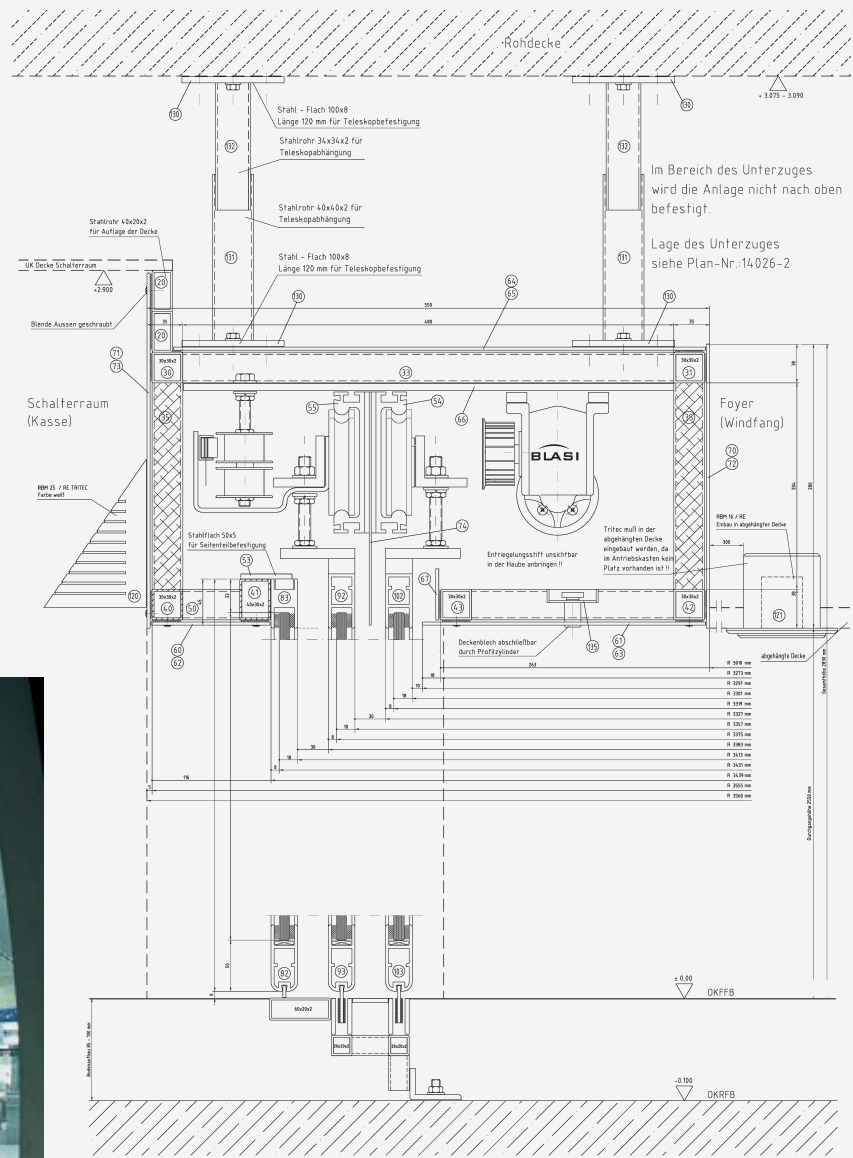


DISTINCTIVE FEATURES

Bespoke telescopic sliding doors. Door leaves consisting of vertically curved safety glass and customised profiles, project specific customised activation devices. All visible parts anodised.



Passage width:	2250 mm
Passage height:	2100 mm
Overall height:	2380 mm


Passage width and passage height are variable.

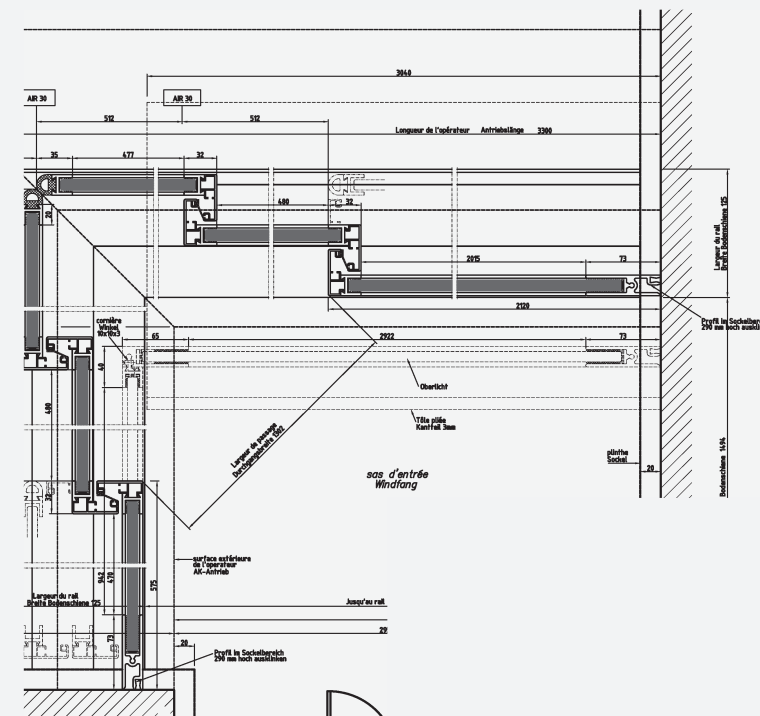

Automatic telescopic prismatic bi-parting sliding door with double glazed safety glass leaves. All visible parts powder coated in bespoke finish.




SLIDER

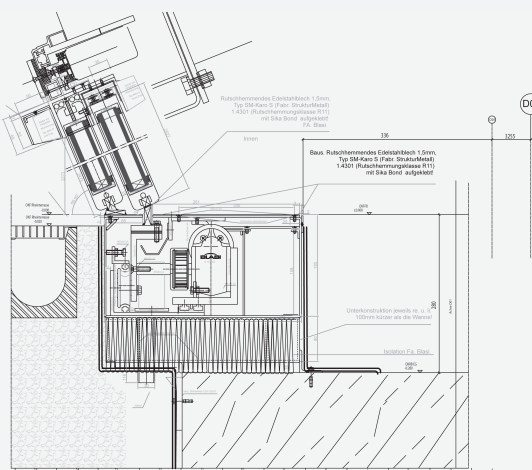

UNDERFLOOR BI-PARTING
INCLINED SLIDING DOOR
DOOR TYPE S 16 SU

Passage width: 1400 mm
Passage height: 2300 mm
Installation depth: 200 mm

Passage width and passage height are variable. Underfloor drive units require a minimum depth of 220 mm.

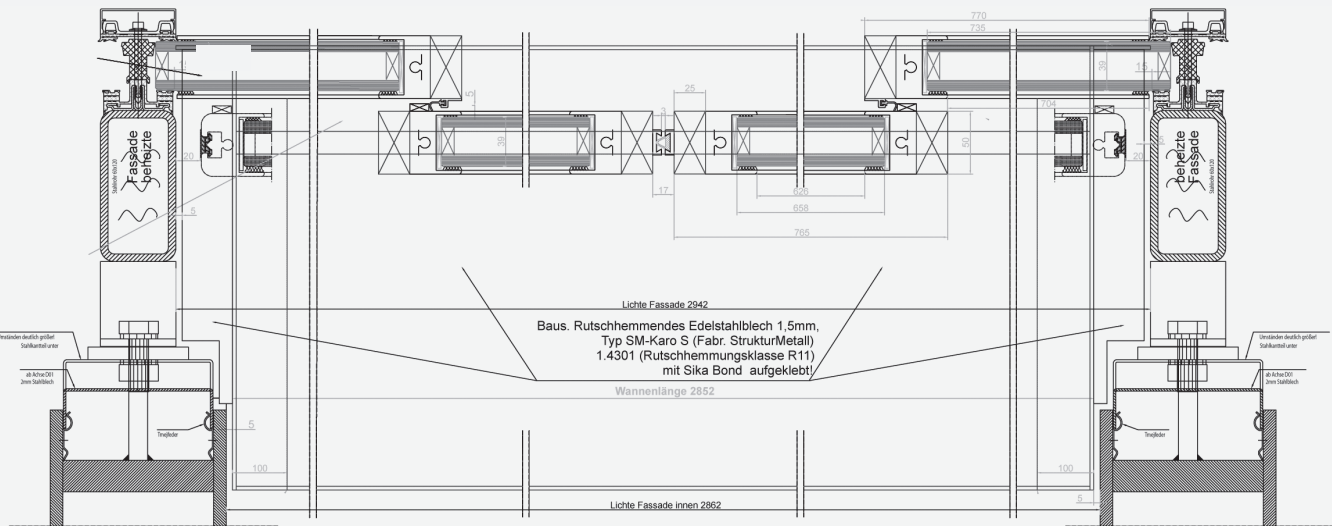

DISTINCTIVE FEATURES

Automatic underfloor sliding door with 17° inclined double glazed safety glass leaves. Integrated drainage. All visible parts anodised.








SLIDER

UNDERFLOOR BI-PARTING
INCLINED SLIDING DOOR
DOOR TYPE S 16 SU

Passage width: 2250 mm
Passage height: 2730 mm
Installation depth: 220 mm

Passage width and passage height are variable. Underfloor drive units require a minimum depth of 220 mm.

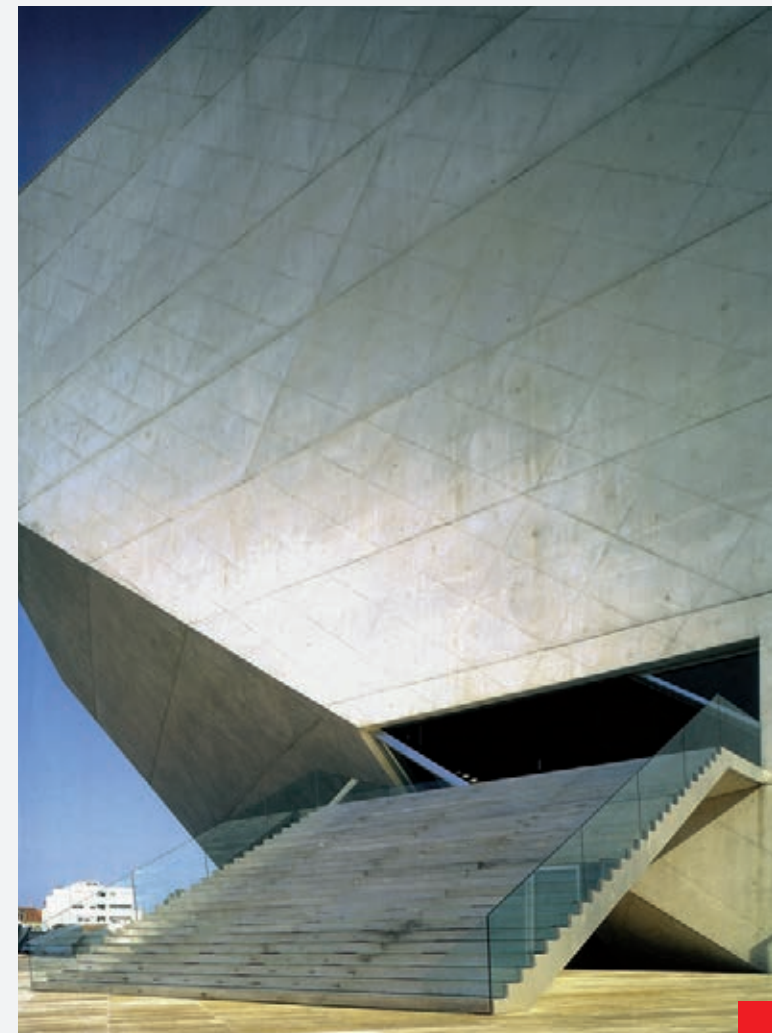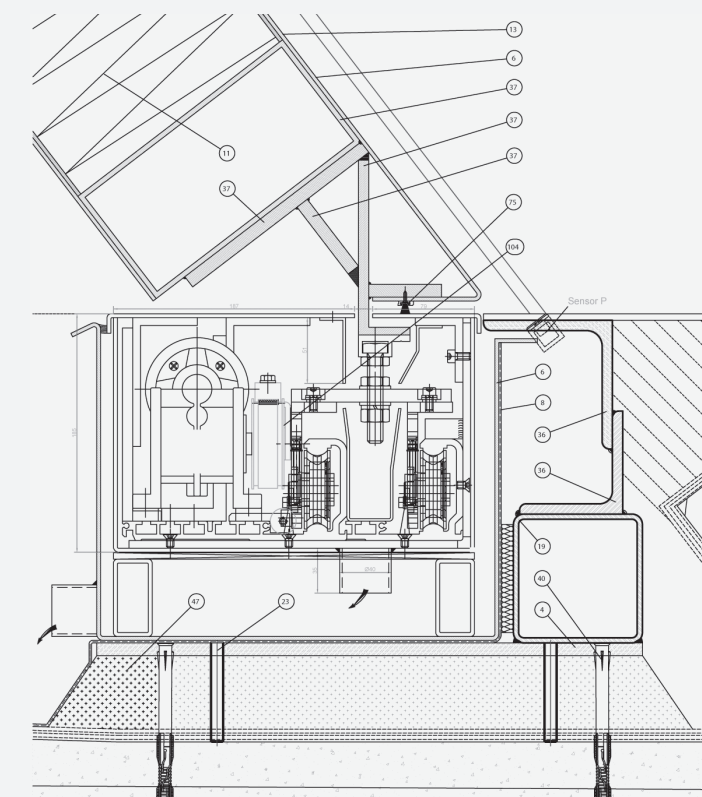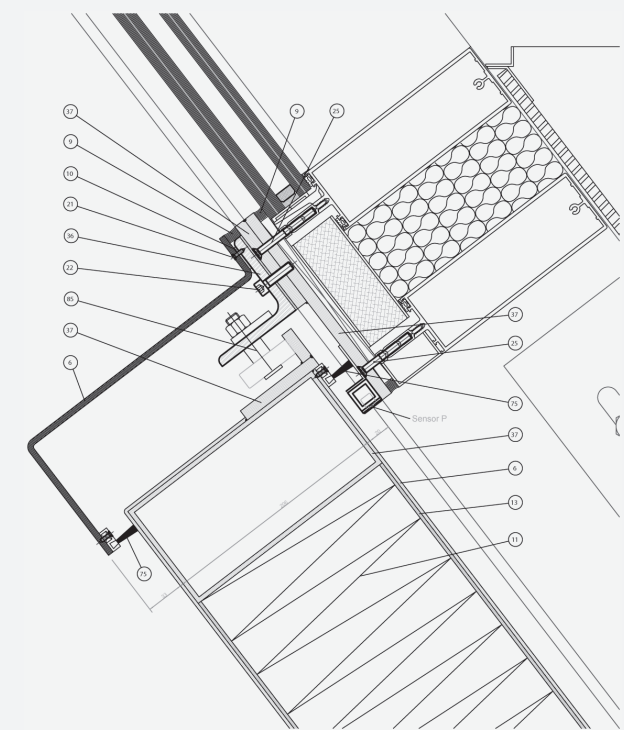


DISTINCTIVE FEATURES

Underfloor sliding door with 35° inclined door leaves.



record STANDARD PORTFOLIO

record – automatic door systems

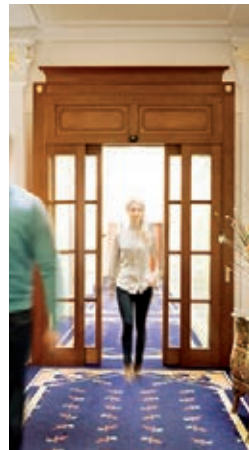

We have been designing, developing, building, selling, installing and maintaining automatic door systems for 60 years. During this length of time, we have accumulated a wealth of knowledge, from which, in turn, a wealth of solutions can be derived.


Our automatic door systems reflect this knowledge in all its facets, and results in a wide range of models capable of fulfilling the requirements of practically any entrance.

Whether in functional applications such as escape routes, fire containment or separating two climate zones; whether enhancing convenience by providing barrier-free access in nursing homes, or enabling touch-free access to operating theatres, or as a welcoming gesture in department stores; whether functioning as a security interlock in sensitive areas, permitting one-way access only, or functioning as a representative telescopic, revolving or curved sliding door: record makes all these options possible.



SLIDING DOORS

LINEAR SLIDING DOOR
record system 20

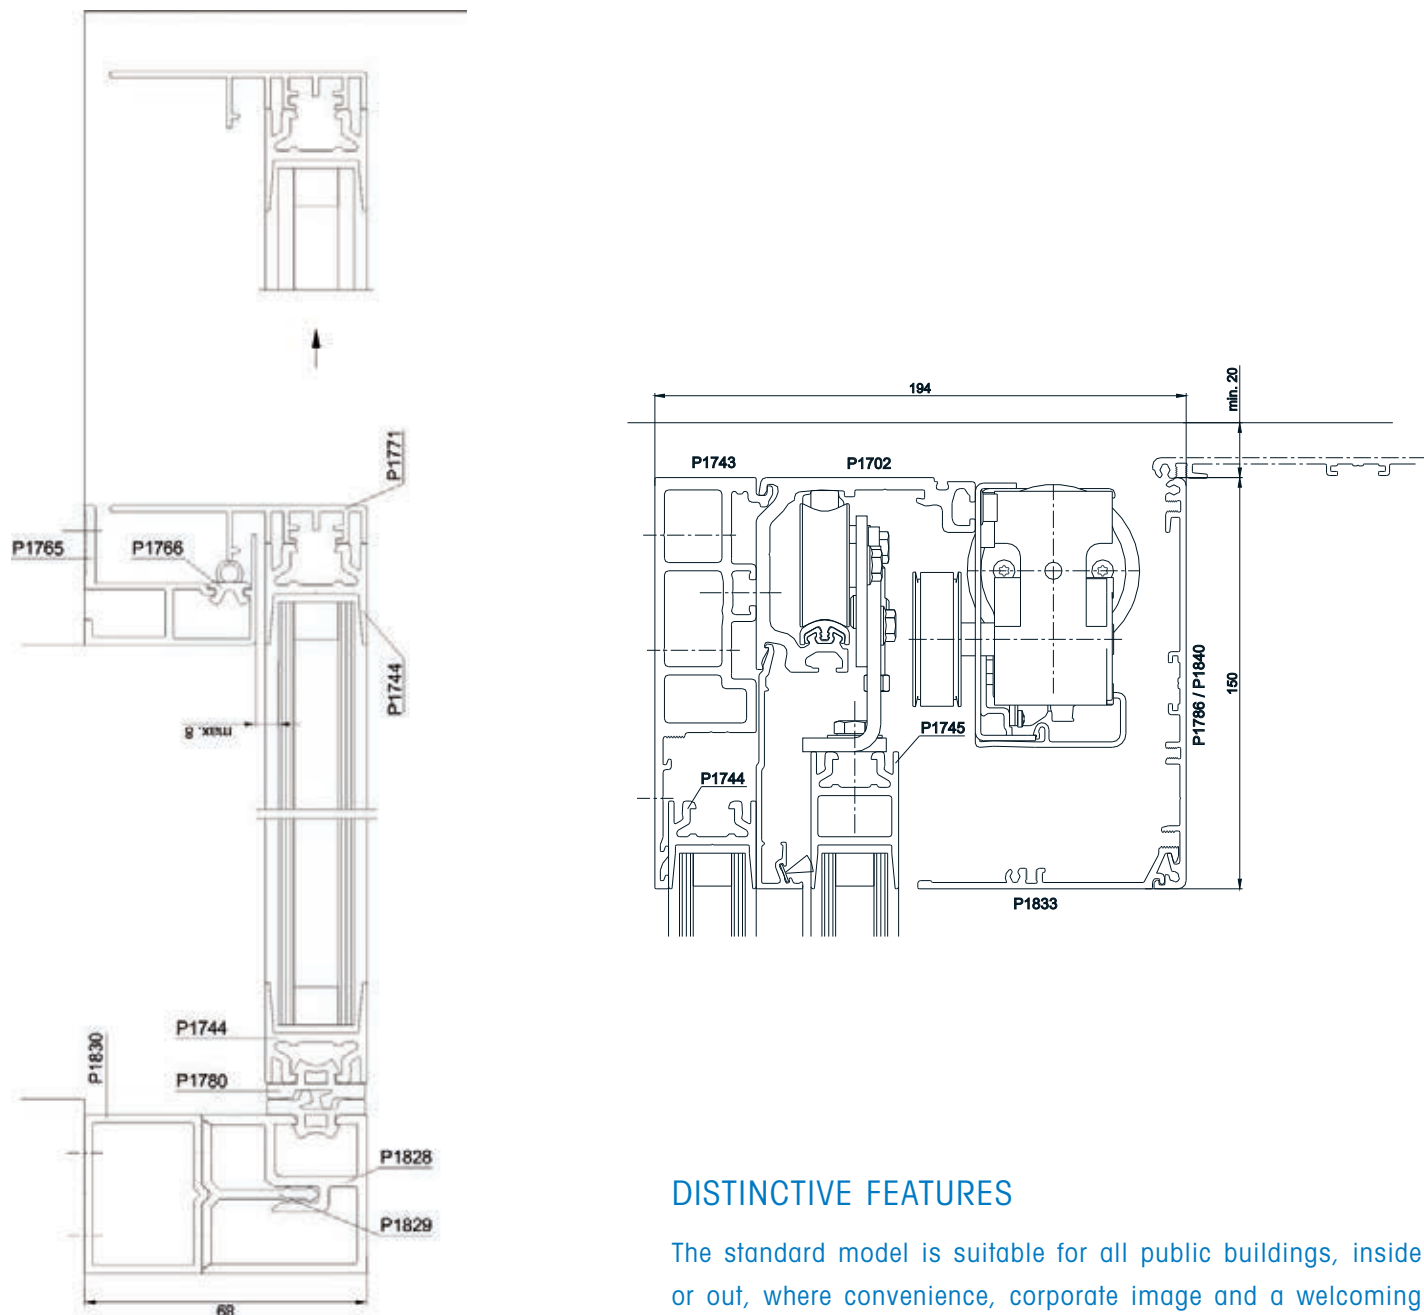


DISTINCTIVE FEATURES

The standard model is suitable for all public buildings, inside or out, where convenience, corporate image and a welcoming entrance are important priorities. Also ideal for private applications.



SLIDING DOORS

TELESCOPIC SLIDING DOOR
record system 20

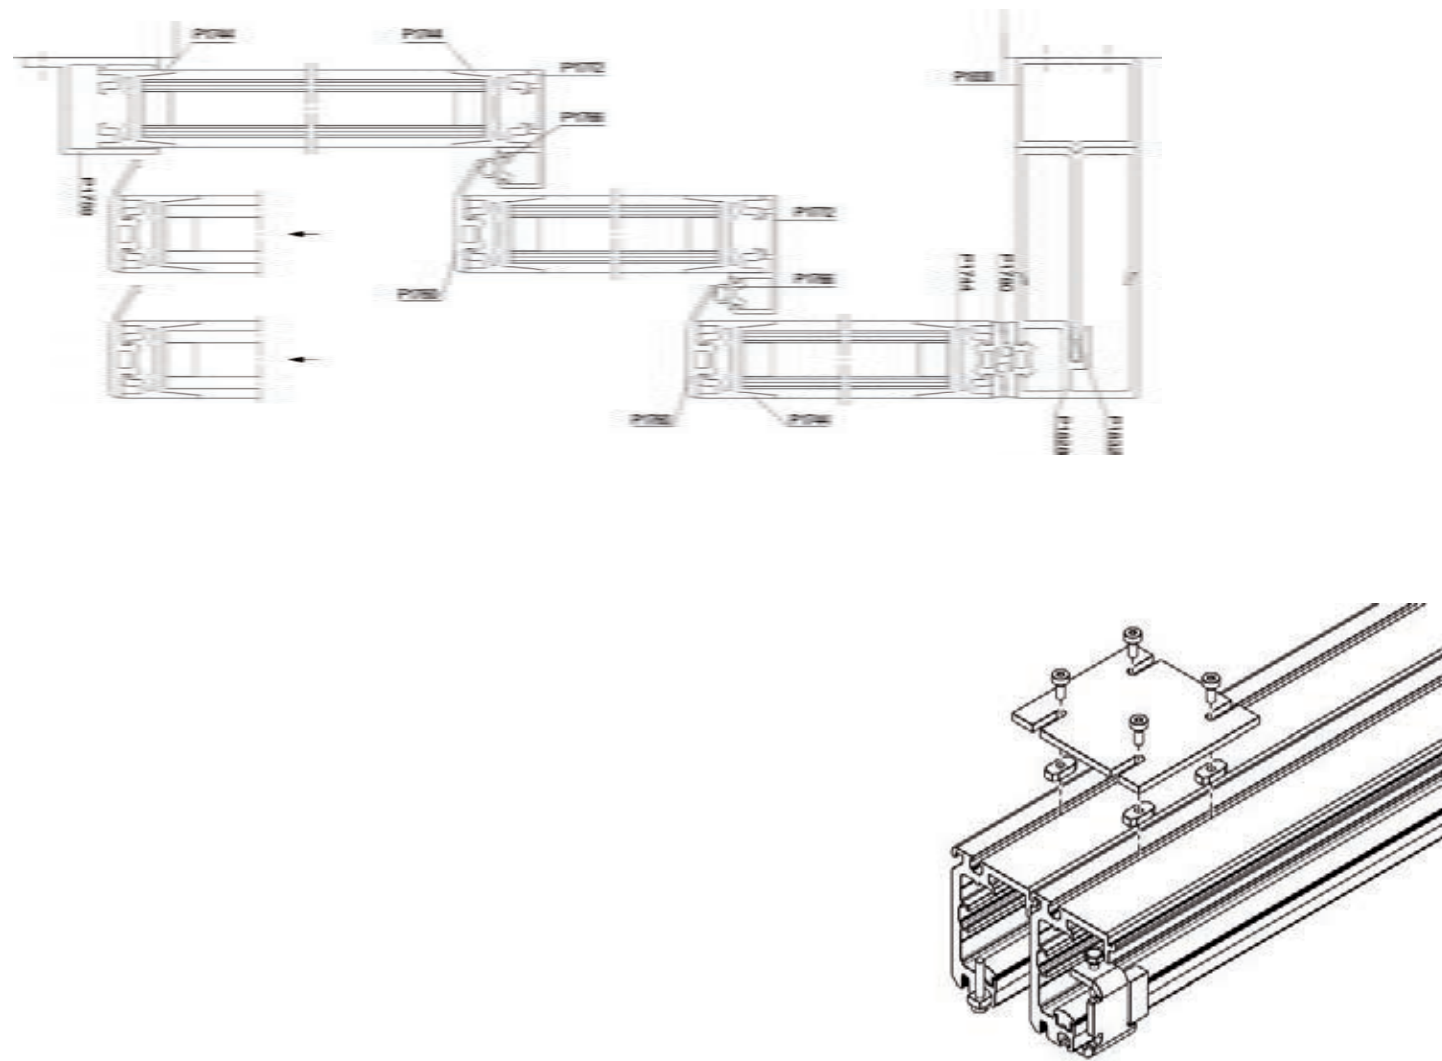


DISTINCTIVE FEATURES

The ideal choice as the representative entrance for your company or enterprise. Particularly suited to hotels, restaurants, hospitals and airports. Well suited to special retail outlets such as jewellery and watch shops, bespoke fashion stores and opticians.



SLIDING DOORS

EMERGENCY EXIT
record system 20

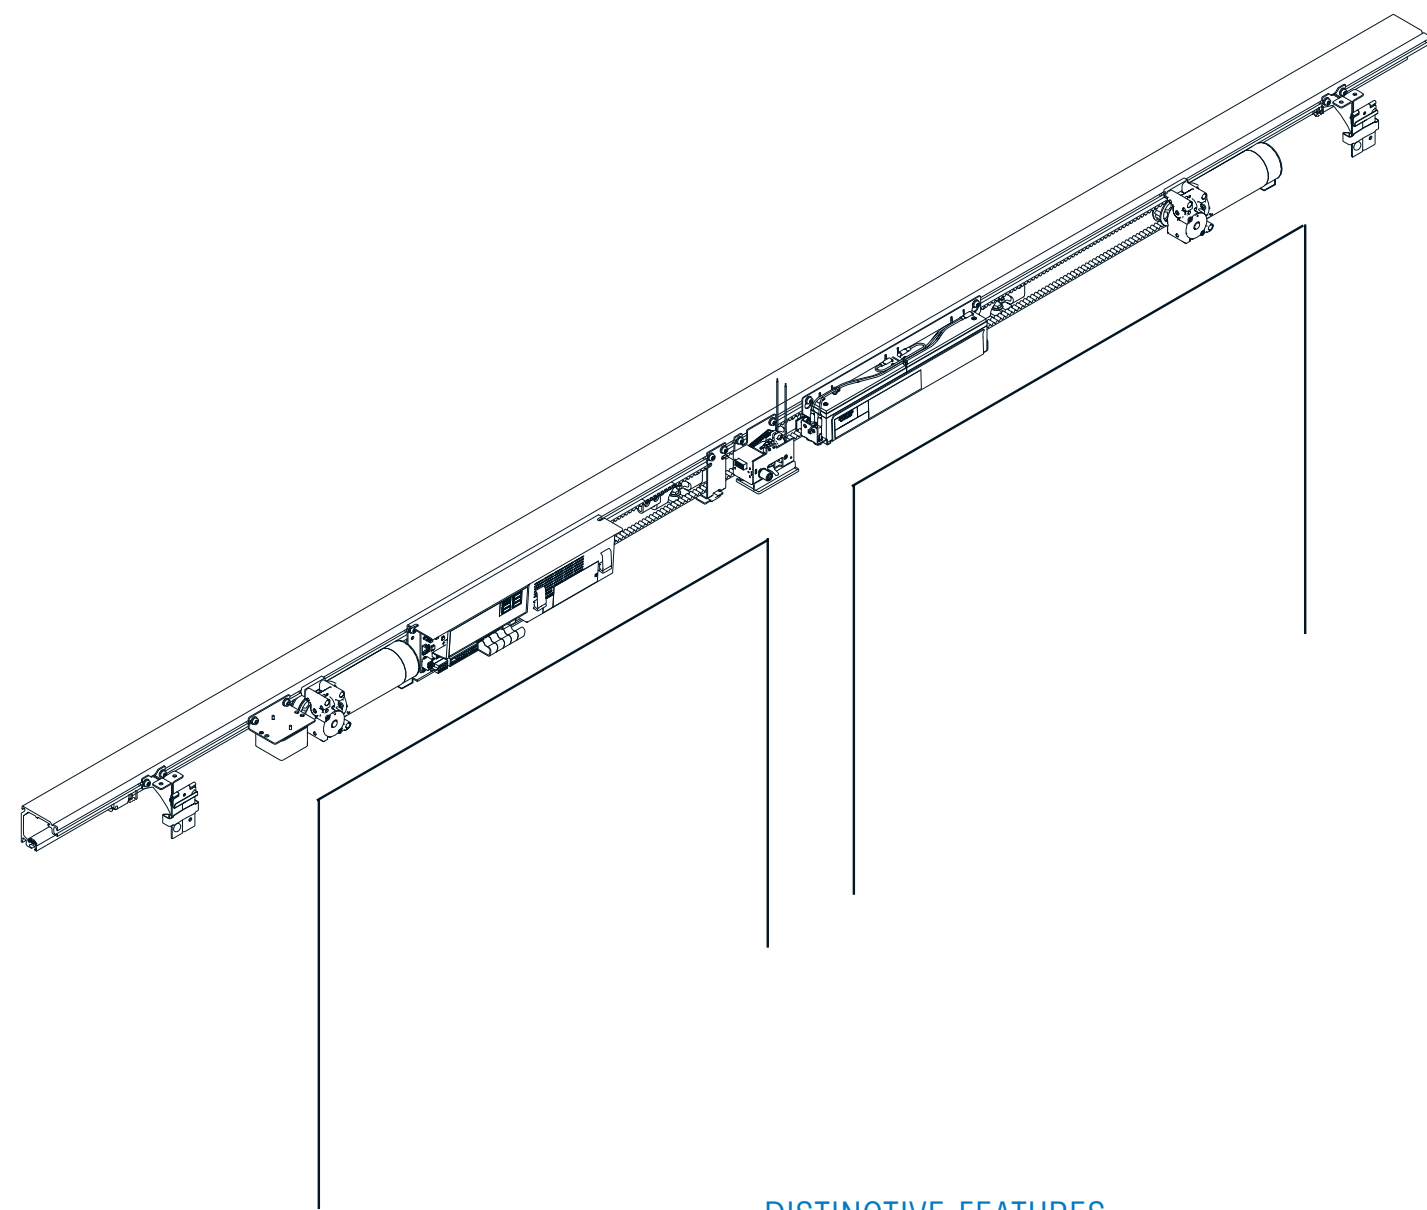



DISTINCTIVE FEATURES

Automatic sliding doors for use in escape and rescue routes, suitable for both inside and outside buildings.



SLIDING DOORS

THERMALLY SEPARATED SLIDING DOOR record THERMCORD

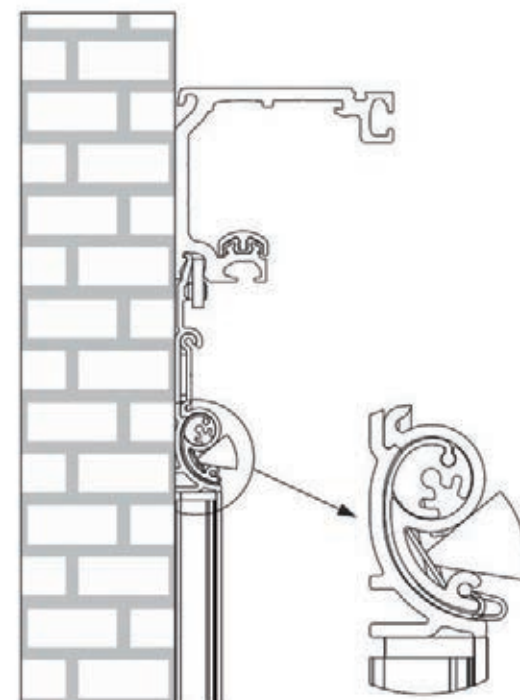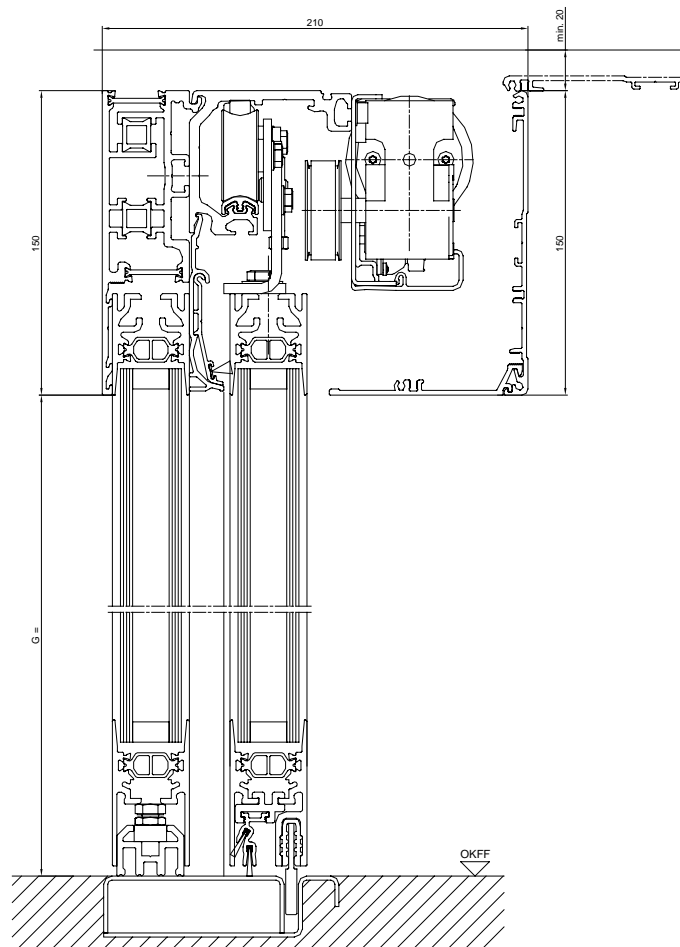



DISTINCTIVE FEATURES

The record THERMCORD is ideal for all construction projects where large temperature fluctuations occur. It can be used as an exterior or interior door, making it suitable for thermally insulating the building from the ambient external temperature, as well as thermally insulating heated interior zones (for example, the spa area) or cooler areas (for example server rooms in data centers).



SLIDING DOORS

SLIDING DOOR RC 2
record SAFECORD

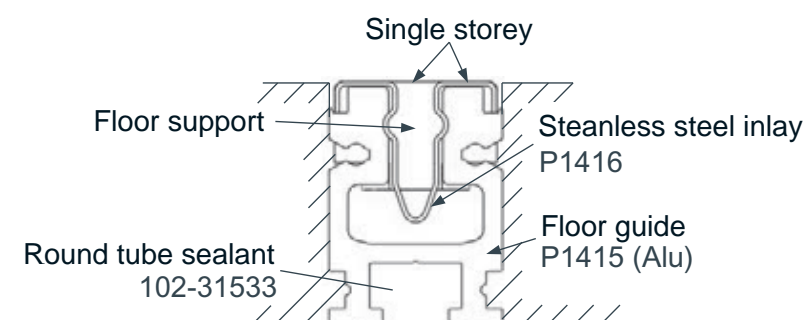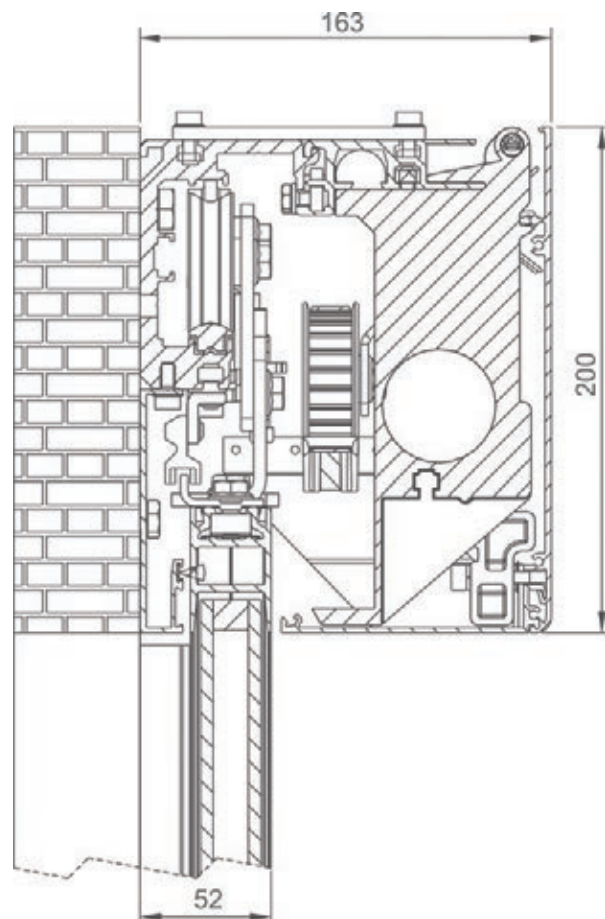


DISTINCTIVE FEATURES

Ideal for entrances or areas with heightened security requirements.



SLIDING DOORS

TOTAL OPENING SYSTEM
record TOS

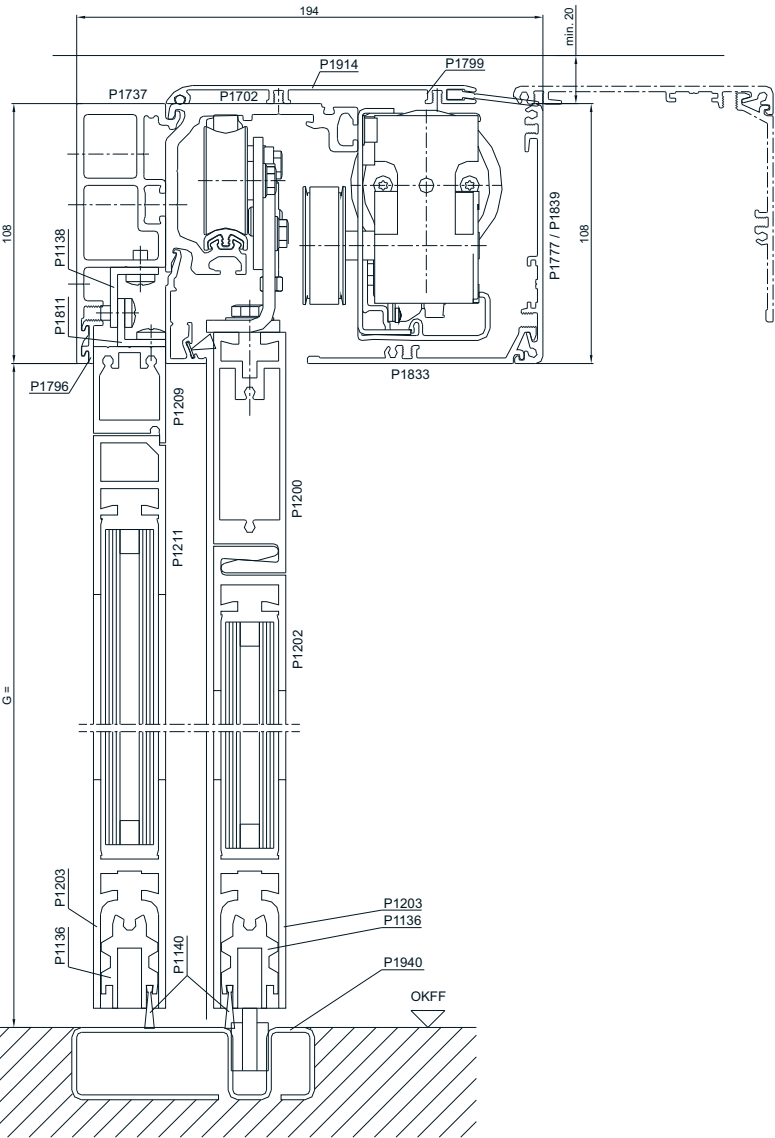


DISTINCTIVE FEATURES

This door system allows both door leaves and side panels to be swivelled outwards by 90° using (adjustable) pressure from the inside. The total opening system is recommended for use in escape and rescue routes and for buildings with vehicle traffic or bulky items.



SWING DOORS

SWING DOOR
record DFA 127

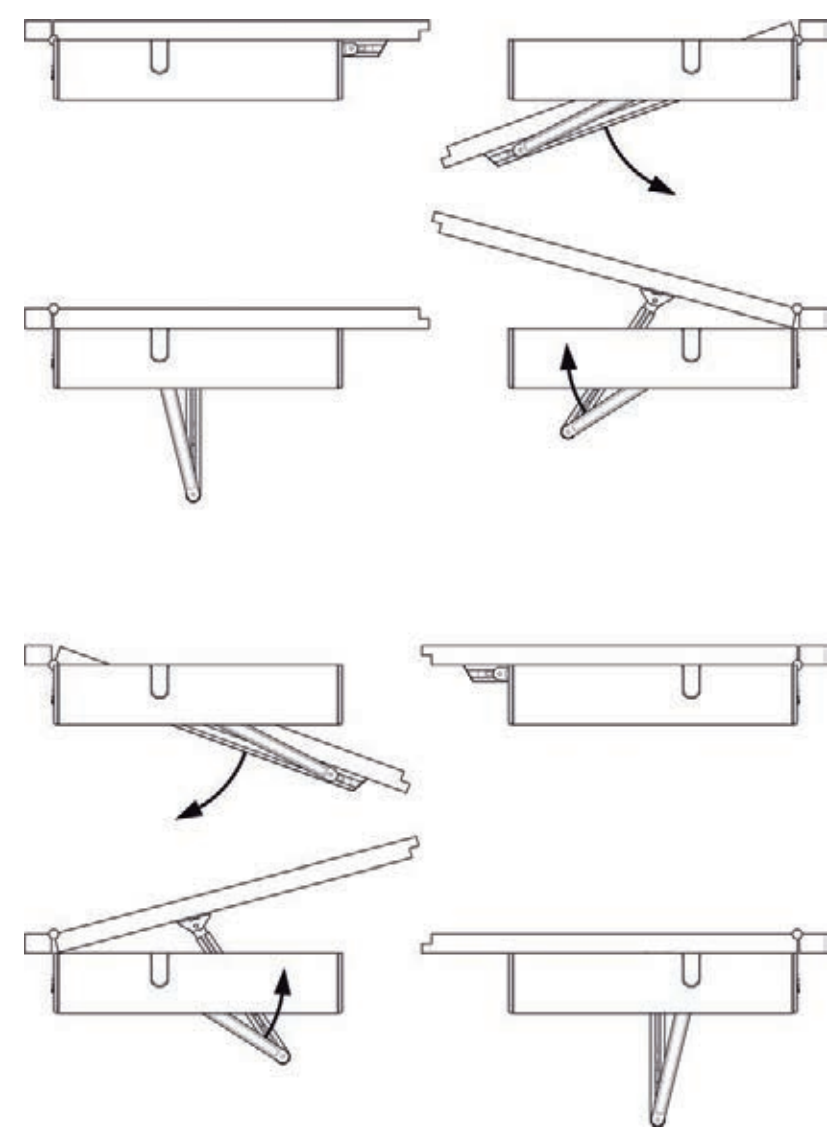


DISTINCTIVE FEATURES

The record swing door operator features refined technology, compact design and practically silent operation.



SWING DOORS

UNDERFLOOR SWING DOOR record C 127

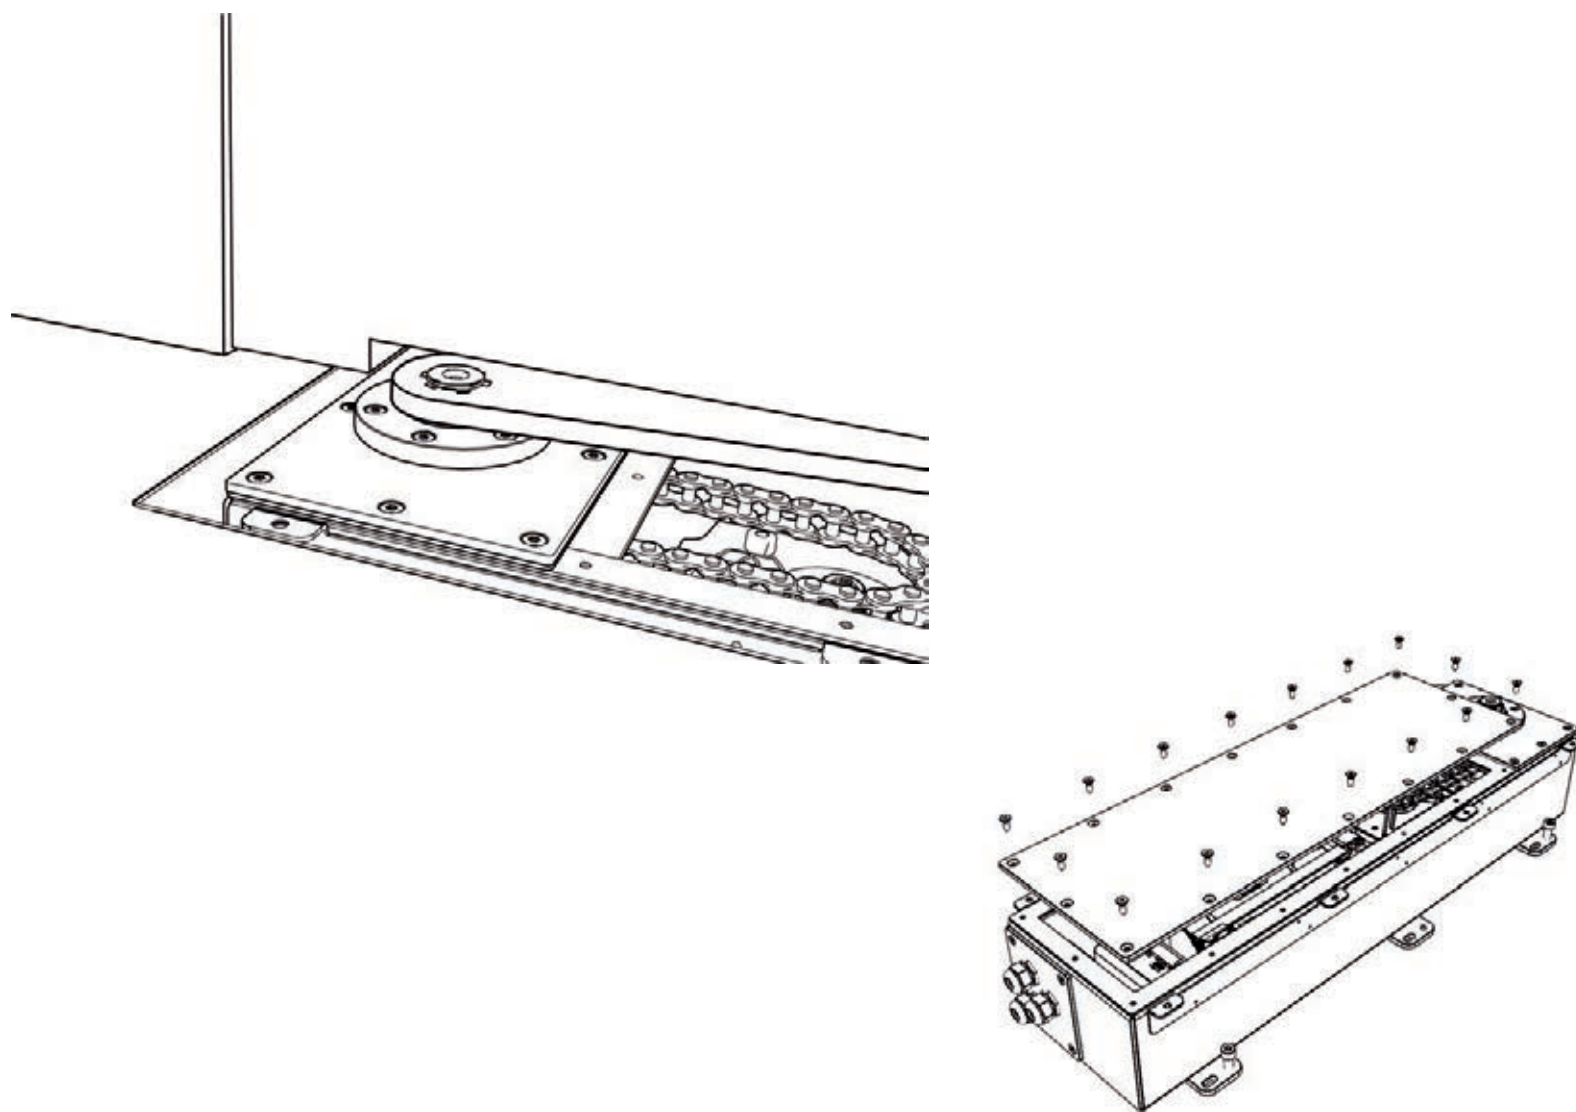


DISTINCTIVE FEATURES

Thanks to its modular construction and ability to fit existing doors, the record C 127 under-floor operator is amazingly flexible and can be used for the widest possible range of applications.



FOLDING DOORS

FOLDING DOOR
record FTA

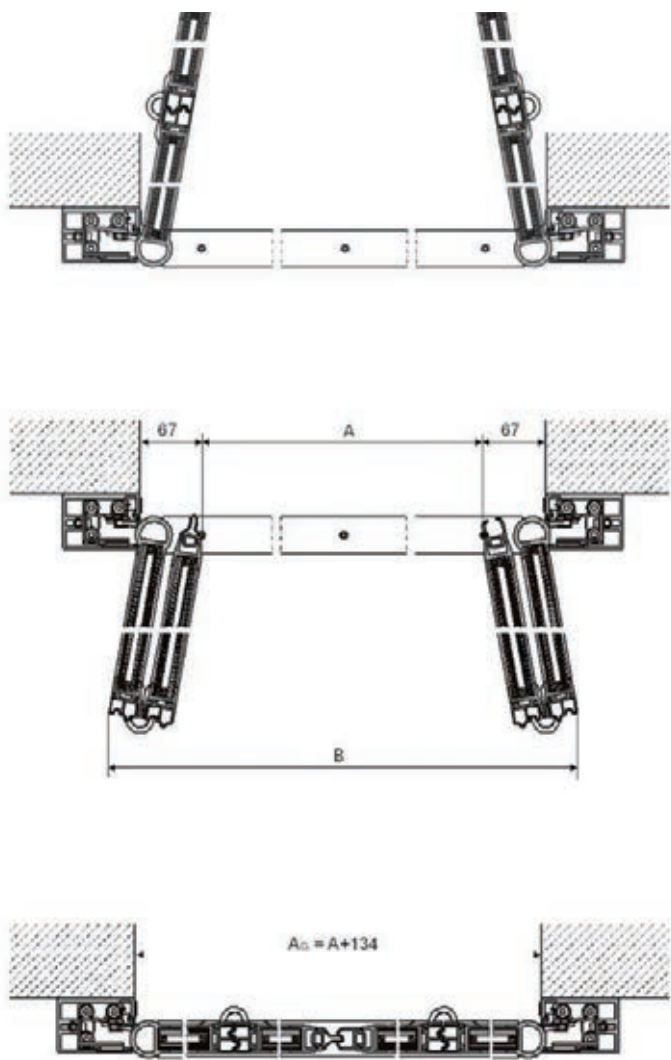



DISTINCTIVE FEATURES

The record folding door is ideal for narrow passageways in restaurants, hotels, business headquarters, hospitals and old people's homes.



SEALED DOOR SYSTEMS

HERMETICALLY SEALED DOOR SYSTEMS
record CLEAN K 1

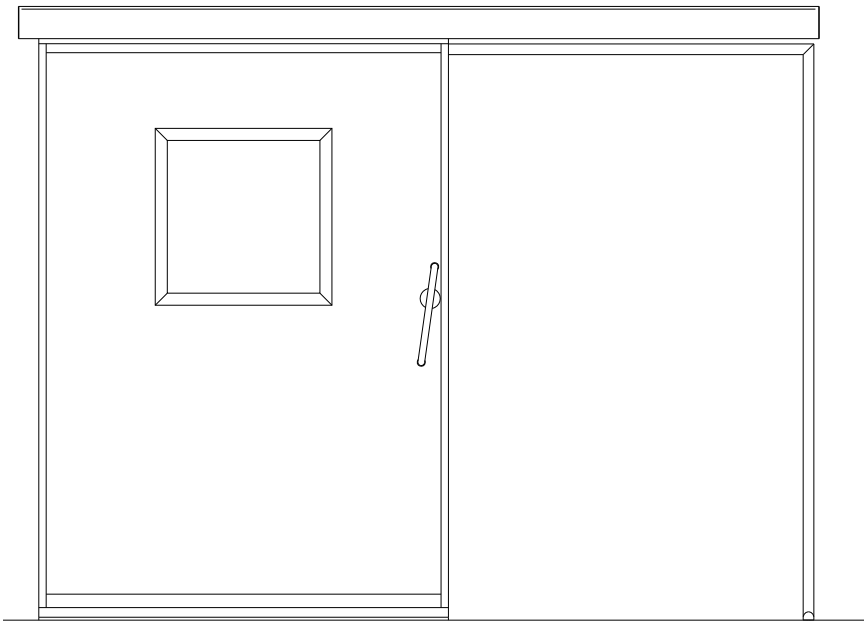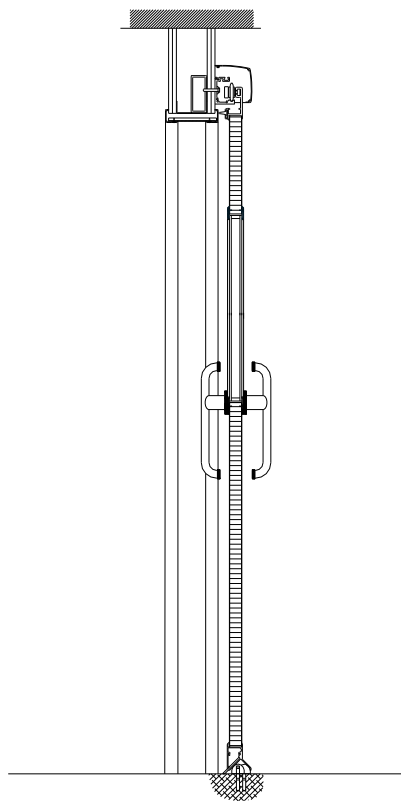



DISTINCTIVE FEATURES

The record CLEAN K 1 product range provides automatic door systems for environments with special requirements. record CLEAN door solutions are used in hospitals, doctors' practices and other facilities with hygiene-critical requirements, all produced entirely in-house.



CURVED SLIDING DOORS

CURVED SLIDING DOOR record RST

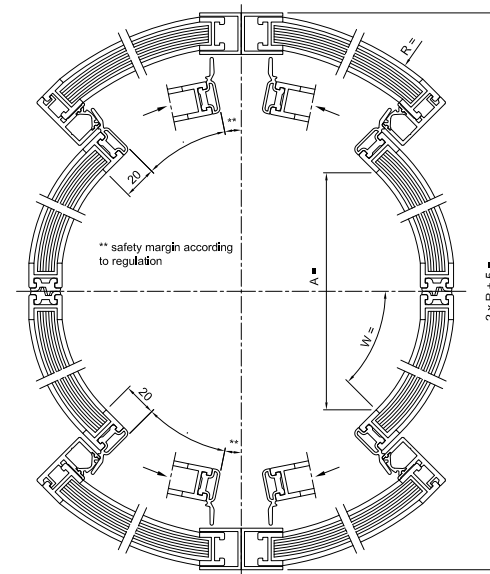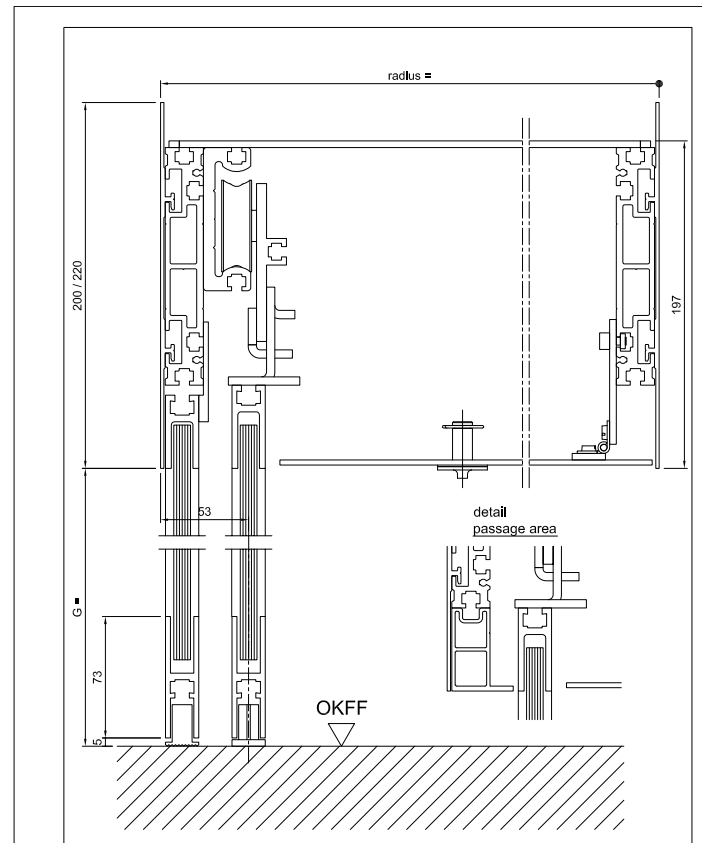


DISTINCTIVE FEATURES

The curved automatic sliding door for special entrances. Enhances the elegance and style of any building. Suitable for all buildings used by the public where elegant looks are a top priority.



SECURITY DOORS

SECURITY DOOR
record FlipFlow

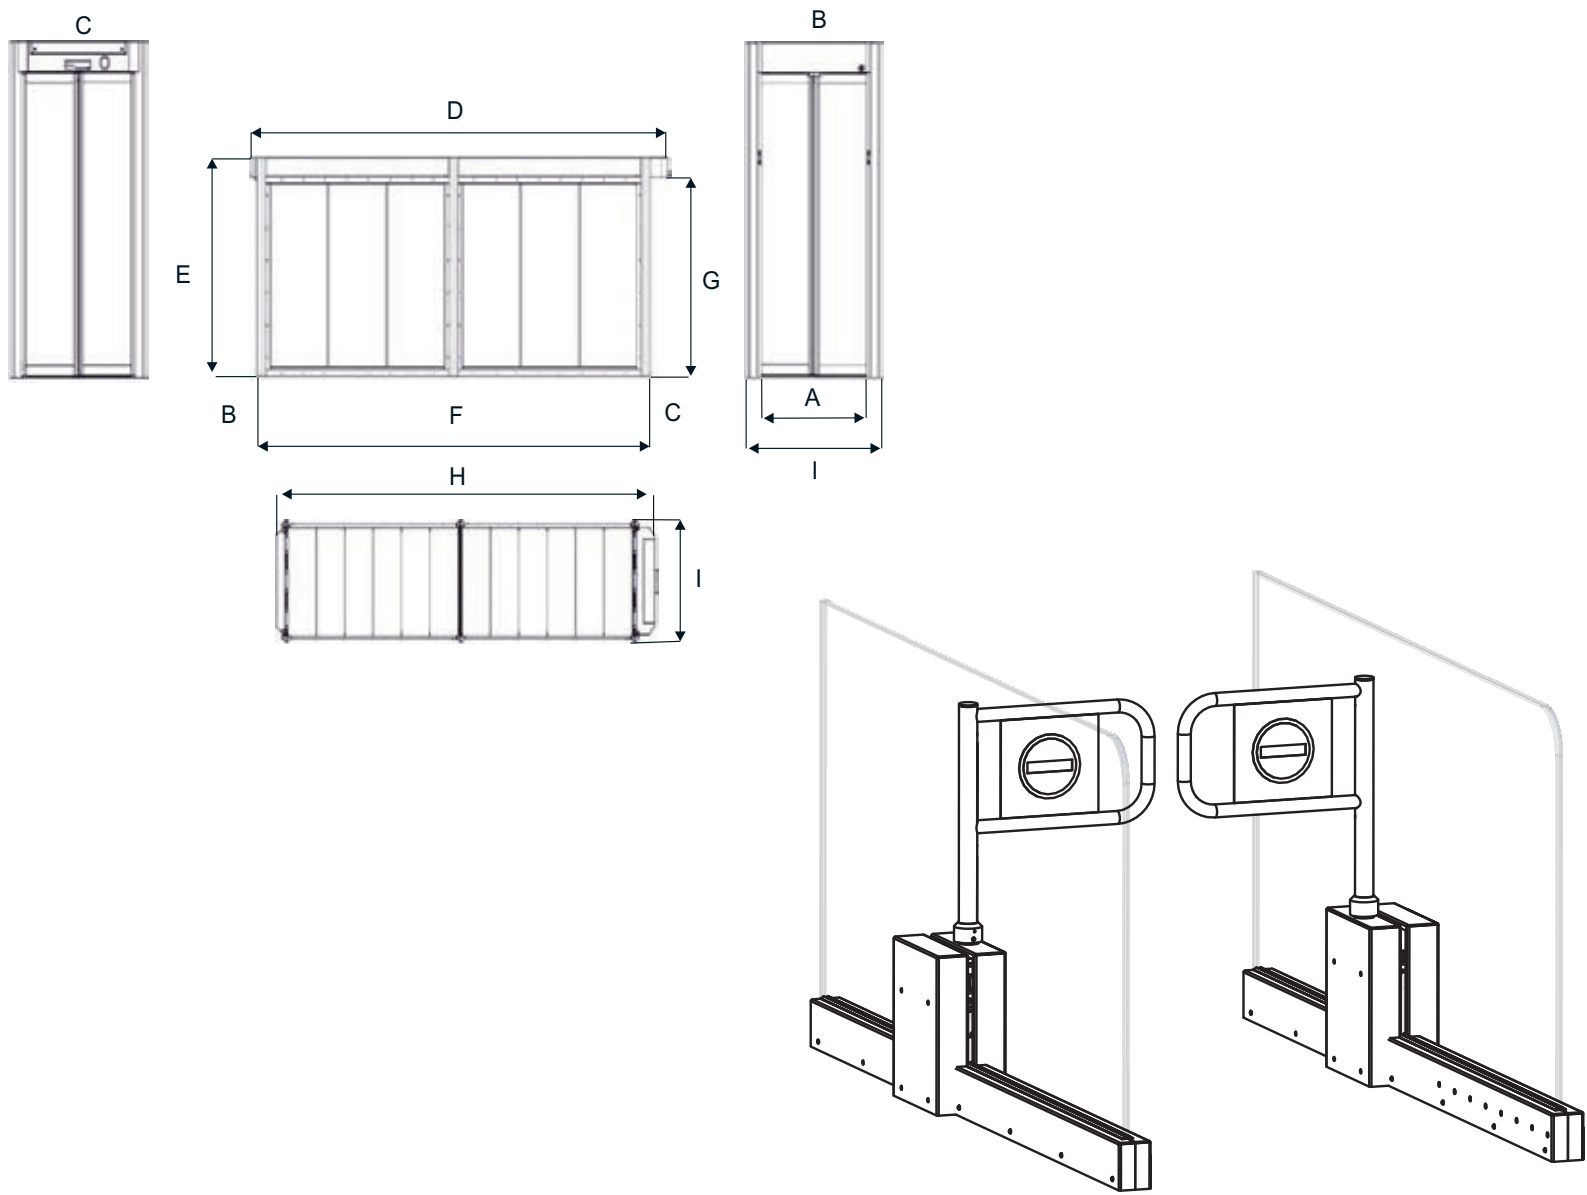



DISTINCTIVE FEATURES

The record FlipFlow range of products is designed to control the flow of people at airports and other sensitive areas inside buildings.



SECURITY DOORS

SECURITY DOOR
record SECURITY PORTAL R 62

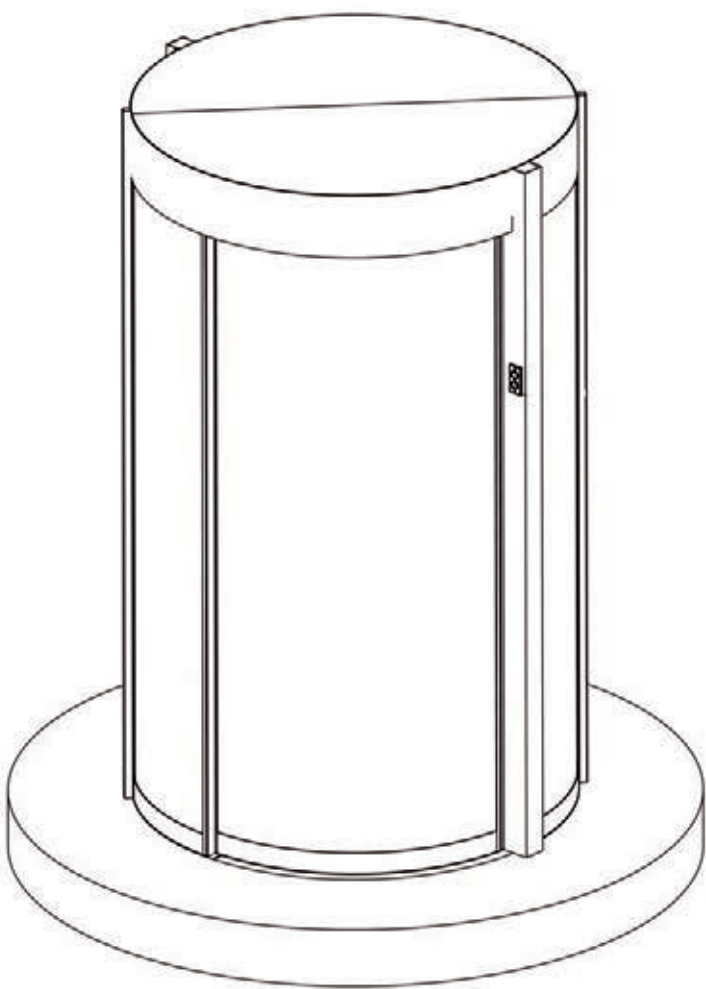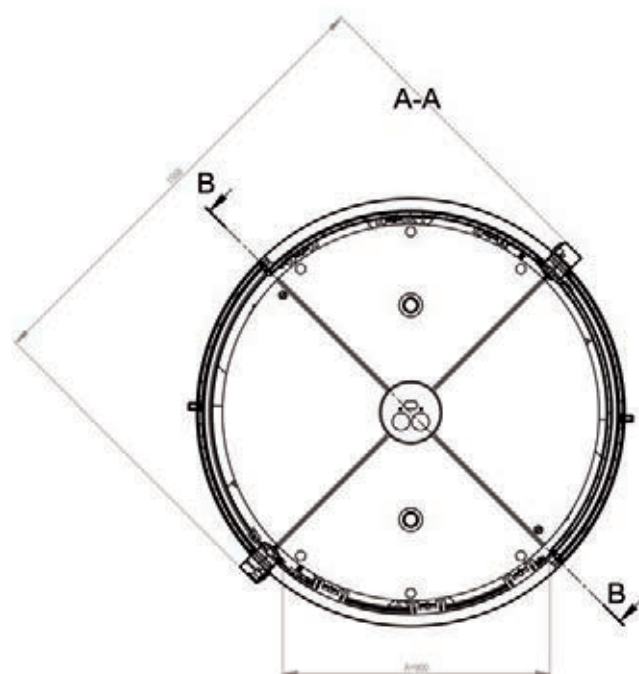


DISTINCTIVE FEATURES

Door systems of the record R 62 range are the first choice in security sensitive areas where the access of persons has to be selected reliably with anti-tailgating and anti-piggybacking technologies.



SECURITY DOORS

SECURITY DOOR
record SECURITY REVOLVING

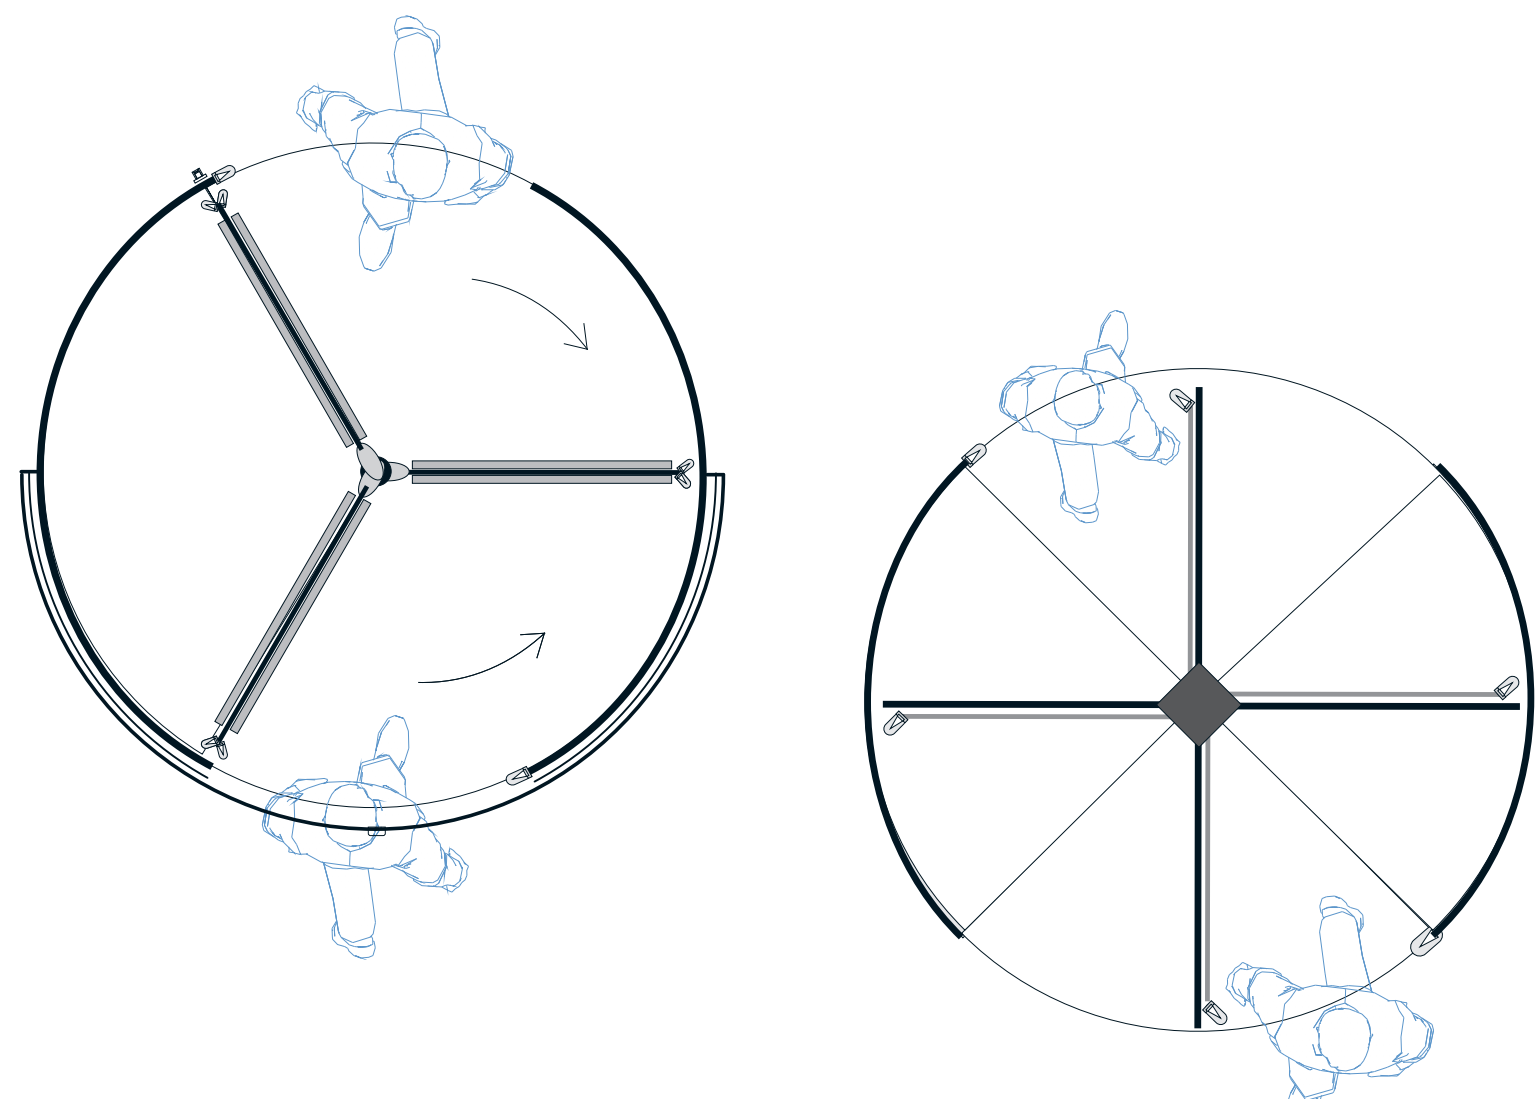

DISTINCTIVE FEATURES

Security revolvers are used in public buildings, financial institutions and in security sensitive areas.




your global partner for entrance solutions



GATES

GATES
record SPEEDCORD

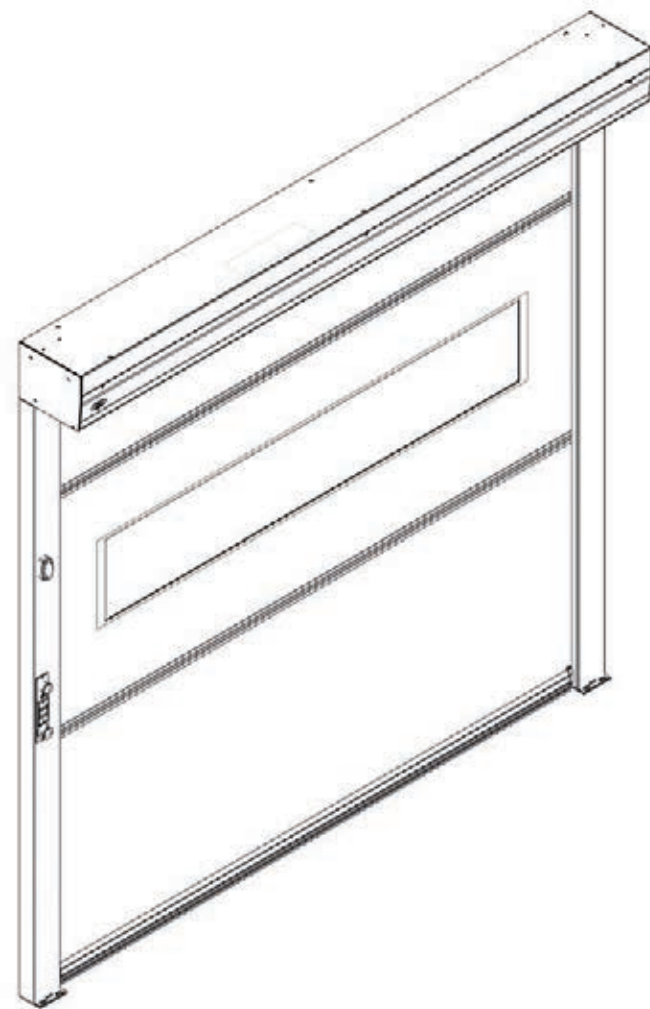


DISTINCTIVE FEATURES

These robust high-speed gates are reinforced with bars of coated steel, stainless steel or aluminium, and have a clear width of passage of up to 3000 mm.



GATES

GATES
record MINIROLL

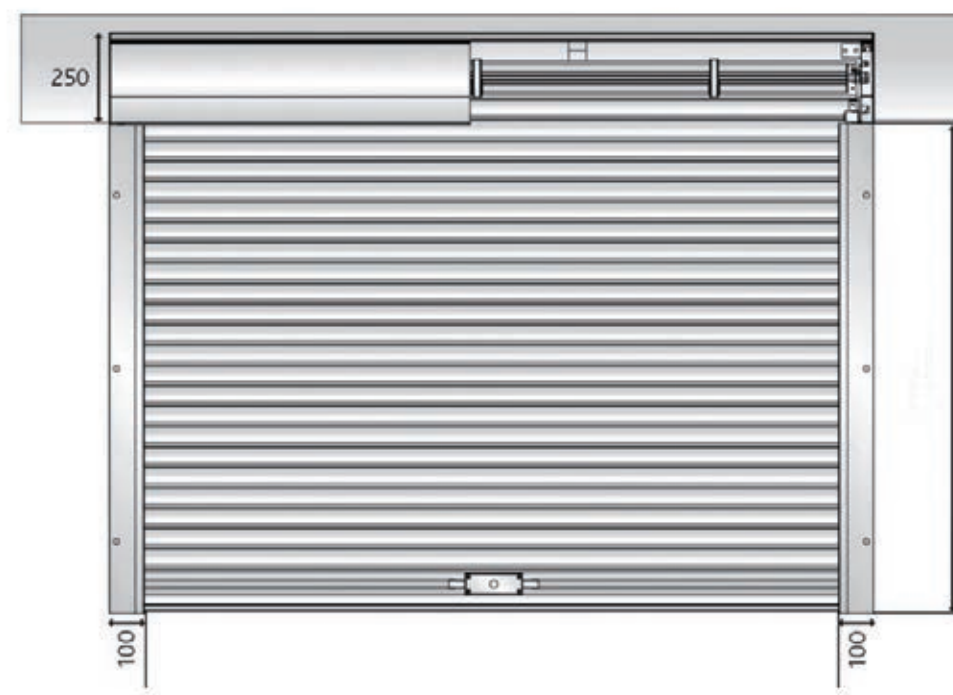

DISTINCTIVE FEATURES

The record GATE MINIROLL is an automatic roller door that ensures effective burglar protection for windows, entrances and passageways. It is suitable for shops, private homes and, thanks to its maximum width of 4000 mm and height of 3000 mm, as a navigable passage for industrial applications.



record – SERVICE & MAINTENANCE

We provide a wide range of maintenance and service contracts that allow to control operational costs and make huge savings on servicing charges.

OUR SERVICES

- Consulting and sales
- Installing and commissioning
- Servicing and maintaining doors
- Trouble-shooting
- Renovating older installations
- Supplying spare parts and support

BENEFITS OF REGULAR MAINTENANCE

- Reduces operating and servicing costs
- Ensures installation retains its value and long life
- Ensures installation fulfils all legal requirements
- Saves on spare parts and maintenance costs
- Extends the guarantee period

Ask about suitable service and maintenance contracts. Over 700 service points worldwide.

Represented worldwide in over 50 countries through subsidiaries and distributors.

